







奥凯电气

—— 品质铸就辉煌 ——

电缆桥架

CABLE SUPPORTS SYSTEM



江苏奥凯电气有限公司
JIANGSU OKEY ELECTRIC CO.,LTD.



BRIEF 企业简介 **INTRODUCTION**

江苏奥凯电气有限公司是一家中外合资企业,位于风景秀丽的中国江苏省镇江新区港南大道88号,周边环境优雅,交通便捷。公司注册资金1868万美元,现拥有5.6万平方米的研发、制造基地和标准化厂房。公司引进现代化生产设备,先进的检测仪器,研制、开发、制造、销售输配电设备成套高新技术产品。公司管理规范,资质齐全,技术力量雄厚,已通过国家质量管理体系、职业健康安全管理体系以及环境安全管理体系的认证和验收。

本公司主要产品:生产输配电设备、箱式变电站、高低压开关柜、电源治理设备、断路器、高低压封闭母线、电缆桥架、支吊架及光伏、风力发电配套产品,并从事工业产品的设计、技术研发、技术转让、技术咨询服务及以上产品安装等配套服务。产品严格按国家标准生产并已通过国家强制性3C认证,且达到国际先进水平,产品广泛应用于发电厂、输配电、化工、冶金、石油、房产及标准化工厂等重要建设工程项目,品种齐全,完全满足不同用户,不同场合与不同环境的客户需求,且得到用户一致好评。

公司于2012年正式引进现代化生产设备、先进的检测仪器,研制开发预警系统成套高新技术产品,产品达到国际先进水平,得到用户一致好评。2012年11月,爆炸物危险实时监控安全预警系统荣获军队科技进步一等奖。

奥凯电气正以“科技先行,质量为本,客户至上,服务至佳”为原则,继往开来,不断进取,团结奋进,走向更加辉煌的明天!



办公楼大厅



研发中心

目

录

CONTENTS

电缆桥架选型与安装及表示方法	1
XQJ 大跨距电缆汇线桥架 Longspan Cable Tray	9
XQJ 梯级式电缆桥架 Ladder Type	13
XQJ 托盘式电缆桥架 Tray Type	18
XQJ 槽式电缆桥架 Channel Type	23
组合式电缆桥架 Combination Type	32
附件 Accessory	38
铝合金电缆桥架 Al-alloy Type	41
防火电缆桥架 Fire prevention Tray	61
固定件及配件 The Fixed Fittings	73
XQJ 电缆桥架支架 Supports	78
抗震支吊架 Anti-seismic hanger	86
太阳能光伏支架 Solar Photovoltaic Sients	92



电缆桥架的选型与安装

一、适用范围：

XQJ、LQJ、FQJ 系列电缆桥架适用于电压在10千伏以下的电力电缆，以及控制电缆、照明配线等室内、室外架空电缆、电缆沟、隧道的敷设。

二、结构特点与安装：

XQJ、LQJ、FQJ 系列电缆桥架具有品种全、应用广、强度大、结构轻、造价低、施工简单、配线灵活、安装标准，外形美观的特点，对您处的技术改进、扩充电缆、维护检修带来方便。

XQJ、LQJ、FQJ 系列电缆桥架的安装可因地制宜。可随工艺管道架空敷设；楼板、梁下吊装；室内外墙壁、柱壁、隧道、电缆沟壁上的侧装，还可在露天立柱或支墩上安装。大型多层桥架吊装或立装时，应尽量采用工字钢立柱两侧对称敷设。

XQJ、LQJ、FQJ 系列电缆桥架可水平、垂直敷设；可转角、T字形、十字形分支；可调宽、调高、变径。

三、电缆在电缆桥架上的层次安排：

1、电缆桥架层次排列应是弱电流控制电缆在最上层，接着是一般控制电缆，低压动力电缆、高压动力电缆依次往下排列。(见下表)这种排列有利于屏蔽干扰、电力电缆冷却、便于施工。

2、各层电缆桥架层间的距离为：

控制电缆 $\geq 200\text{mm}$

动力电缆 $\geq 300\text{mm}$

机械化敷设电缆 $\geq 400\text{mm}$

Selection and Installation of Cable Tray

1. Scope of Application

XQJ、LQJ、FQJ series cable tray is designed for the layout of power cable (below 10kv), instrument cable and illumination wire in cable channel, tunnel and aerially indoor and outdoor.

2. Structure Features and installation

XQJ、LQJ、FQJ series cable trays is featured by full specification, wide application, powerful strength, light weight, low cost, easy installation, nice appearance, easy cooccurrence-range, etc, which makes it convenient for technical improvement, addition of cables and examination and maintenance.

The installation of cable tray can be made for different surroundings. It may be installed aerially along pipeline beneath ceiling and beam, on the wall, column, tunnel, cable trench and pillars, etc. Heavy multiple cable tray should be symmetrically laid on both sides of H-girder column when installed either suspendingly or vertically.

XQJ、LQJ、FQJ series cable tray is flexible in width, height etc. It can be installed either horizontally or vertically. And it can be easily branched as desired, too.

3. Arrangement of Different cable in Cables Tray


(1) In principle, cables will be laid out in the following seauence from top to bottom: first the weak current shielded cable; second the common instrument cable; third the iow voltage power cable and finally high voltage power cable (see the chart below). Such an arrangement is not only favorable to screen the disturbance to the weak current cable but also convenient for the installation.

(2) Distance Between the Cable in Cable Tray

Shielded cable $\geq 200\text{mm}$

Power cable $\geq 300\text{mm}$

Mechanically laid out cable $\geq 400\text{mm}$

层 次 Sequence	电缆用途 Cable	采用 电缆 桥架 型式 及 型号 Type and Model of Cable Tray Section View of Cable Tray	电 缆 桥 架 断 面 Section View of Cable Tray
up 上 下 down	计算机电缆 computer cable	带屏蔽罩的槽式或B型组合式电缆桥架 XQJ-C或XQJ-ZH-01B XQJ-C; XQJ-ZH-01B	
	屏蔽控制电缆 shielded cable	同 上 XQJ-C; XQJ-ZH-01B	
	一般控制电缆 Commoninstr ument cable	托盘式, A型组合式电缆桥架 XQJ-P、XQJ-ZH-01A XQJ-P; XQJ-ZH-01A	
	低压动力电缆 Power cable (L.V)	梯级式、托盘式, A型组合式电缆桥架 XQJ-T、XQJ-ZH-01A XQJ-T1; XQJ-P1; XQJ-ZH-01A	
	高压动力电缆 Power cable (H.V)	带护罩梯级式XQJ-T1	

四、电缆桥架尺寸选择与计算

电缆桥架的载荷G总的计算:

$$G_{\text{总}} = n_1 q_1 + n_2 q_2 + n_3 q_3 + \dots$$

式中: q_1 、 q_2 、 q_3 为各电缆每单位长度的重量(kg/m)

n_1 、 n_2 、 n_3 为相应电缆的根数

G应小于电缆桥架的允许载荷(参照载荷曲线图表)

当电缆桥架在室外或带护罩时, 还应计入水载和风载等因素。

电缆桥架宽度b的计算:

1. 电力电缆

$$b = n_1(d_1 + k_1) + n_2(d_2 + k_2) + n_3(d_3 + k_3) + \dots$$

式中: d_1 、 d_2 、 d_3 为各电缆直径

n_1 、 n_2 、 n_3 为相应电缆直径的根数

k_1 、 k_2 、 k_3 为电缆间距(k值最小不应小于 $d/4$)

2. 控制电缆桥架宽度b的计算: (一般电缆桥架的填充率取40%左右)

电缆b的总截面积: $S_0 = n_1 \pi (d_1/2)^2 + n_2 \pi (d_2/2)^2 + \dots$

需要的托架横截面积:

$$S = S_0 / 40\% \quad b = S / h = S_0 / 40\% h$$

式中: h为电缆桥架净高

4. Selection and calculation of Size of Cable Tray

(1) Calculation of Total Load of Cable Tray:

$$G = n_1 q_1 + n_2 q_2 + n_3 q_3 + \dots$$

where: G mean total load of cable tray;

q_1 、 q_2 、 q_3 mean weight of each cable per meter (kg/m)

n_1 、 n_2 、 n_3 mean number of corresponding cables.

G should be smaller than the allowable load of cable tray (refer to load curve chart).

When cable tray is installed outdoor or with covers, such factors as rain load and/or wind load should be taken into account.



(2) Calculation of Width of Cable Tray

a. Power Cable

$$b=n_1(d_1+k_1)+n_2(d_2+k_2)+n_3(d_3+k_3)+\dots$$

where: b means width of cable tray;

d_1 、 d_2 、 d_3 mean diameters of cables;

n_1 、 n_2 、 n_3 mean number of cables;

k_1 、 k_2 、 k_3 mean distance between cables; (the value of k over $d/4$)

b. Instrument Cable (Generally the cables to be laid out occupy 40% of the space of cable tray.)

Total section area of cable:

$$S_0=n_1\pi(d_1/2)^2+n_2\pi(d_2/2)^2+\dots$$

section Area of supporters needed:

$$s=S_0/40\% \quad b=s/h=S_0/40\%h$$

where h means net height of cable tray.

五、注意事项:


1. XQJ型电缆桥架装置的最大载荷、支撑间距应小于允许载荷和支撑跨距。
2. 选择电缆桥架的宽度时应留有一定的备用空位，以便为今后增添电缆用。
3. 当电力电缆和控制电缆较少时，可同一电缆桥架安装，但中间要用隔板将电力电缆和控制电缆隔开敷设。
4. 电缆桥架水平敷设时，桥架之间的连接头应尽量设置在跨距的1/4左右处。水平走向的电缆每隔2米左右固定一下，垂直走向的电缆每隔1.5米左右固定一下。
5. 电缆桥架装置应有可靠接地。如利用桥架作为接地干线，应将每层桥架的端部用16mm²软铜线联接(并联)起来，与总接地干线相通。长距离的电缆桥架每隔30-50米接地一次。本厂各连接板的电阻值均小于 3×10^{-4} 欧，可保安全使用。
6. 电缆桥架装置除需屏蔽装保护罩外，在室外安装时应在其顶层加装保护罩，防止日晒、雨淋。对如需焊接安装时，焊件四周的焊缝厚度不得小于母材的厚度，焊口必须防腐处理。

5. Precautions

- (1) The maximum load of XQJ series cable tray shall not exceed its allowable load. And the maximum supporting span shall not exceed its allowable span.
- (2) It is better to make allowances for further addition of cables when making an order as far as the width of cable trays is concerned.
- (3) It is practicable to fix few power cables and few instrument cable in a cables tray, but a separating piece is needed to separate them.
- (4) In laying out cable tray horizontally, it is better to place joints of cable tray a quarter of the span. The cables should be banded every 2 meters in case of horizontal layout and every 1.5 meters in case of vertical layout.
- (5) Grounding system has to be set up. If the cable tray serves as the main grounding, then the end of each layer or cable tray shall be connected in parallel with a copper wire of 16mm², then with the main grounding. Groundings should be made every 30 to 50 meters in case of lengthy cable tray.
- (6) The cable tray needs not only a shield cover but also a shelter over the top to prevent it from sunning and raining when installed outdoor. In case of welding during installation, the welding seam shall be as thick as cable tray sheet and anti-corrosion measures should be taken to the welding bead.


梯级式桥架空间布置示意图

Space Layout Sketch Map of Ladder Type Cable Tray

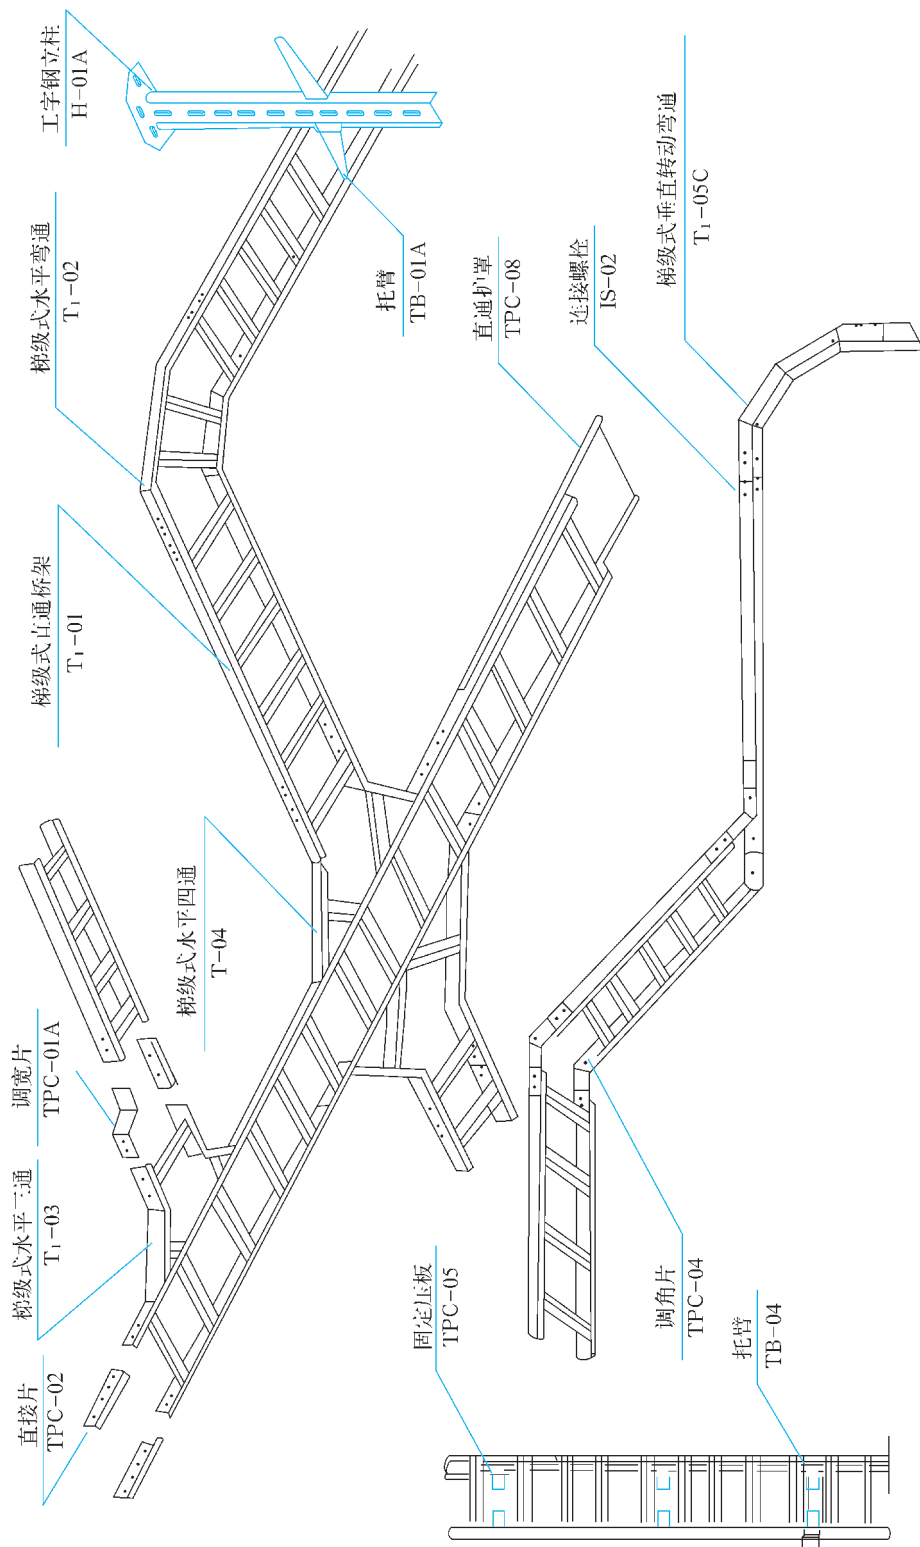




托盘式桥架空间布置示意图 Space Layout Sketch Map of Tray Type Cable Tray

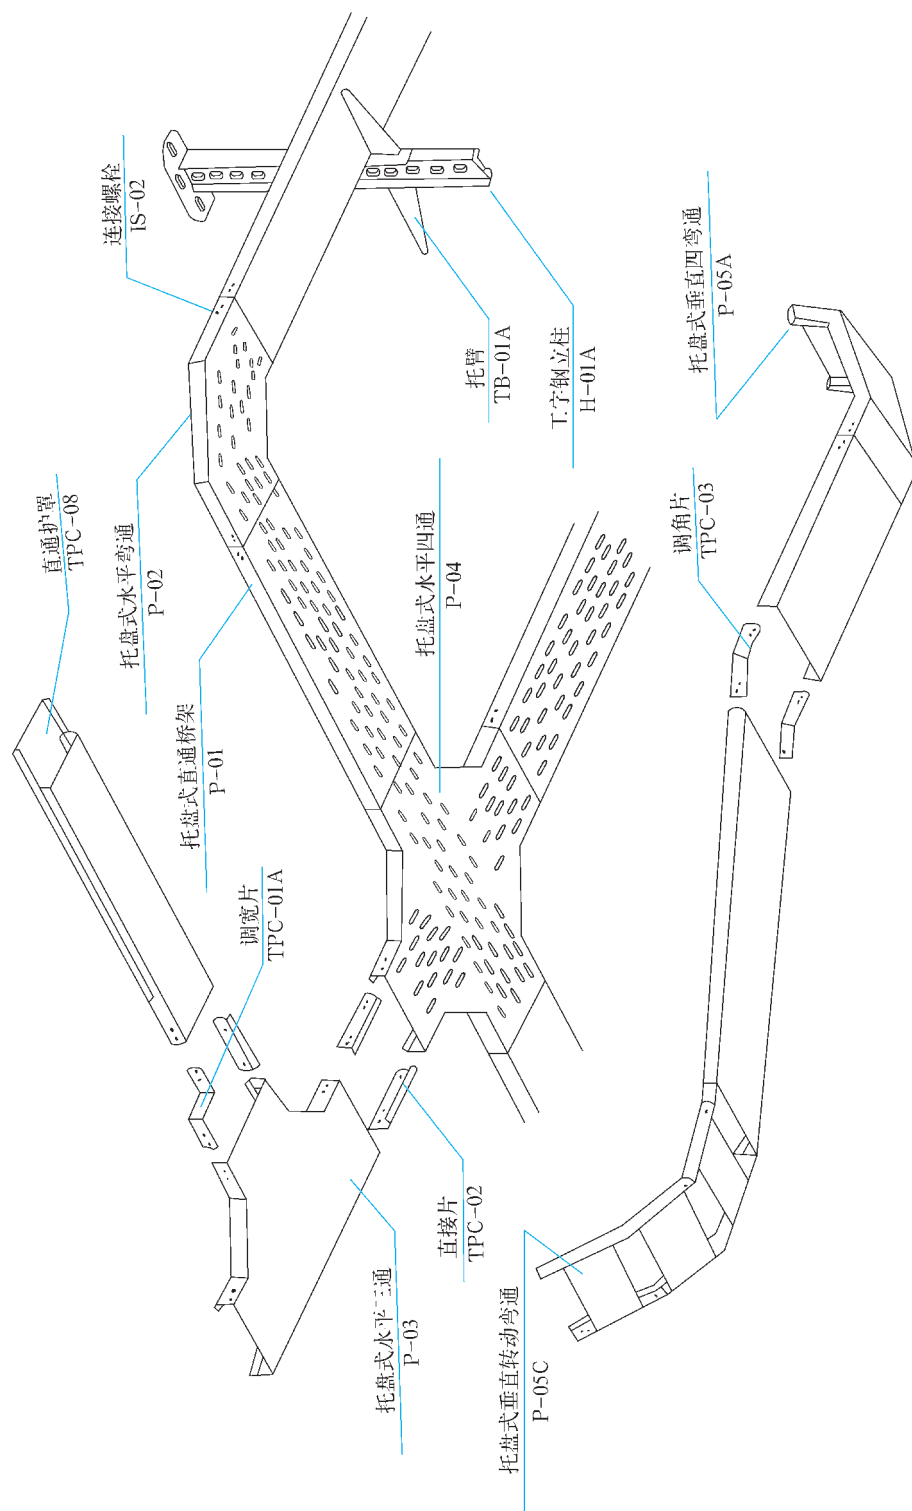

槽式桥架空间布置示意图


Space Layout Sketch Map of Channel Type Cable Tray

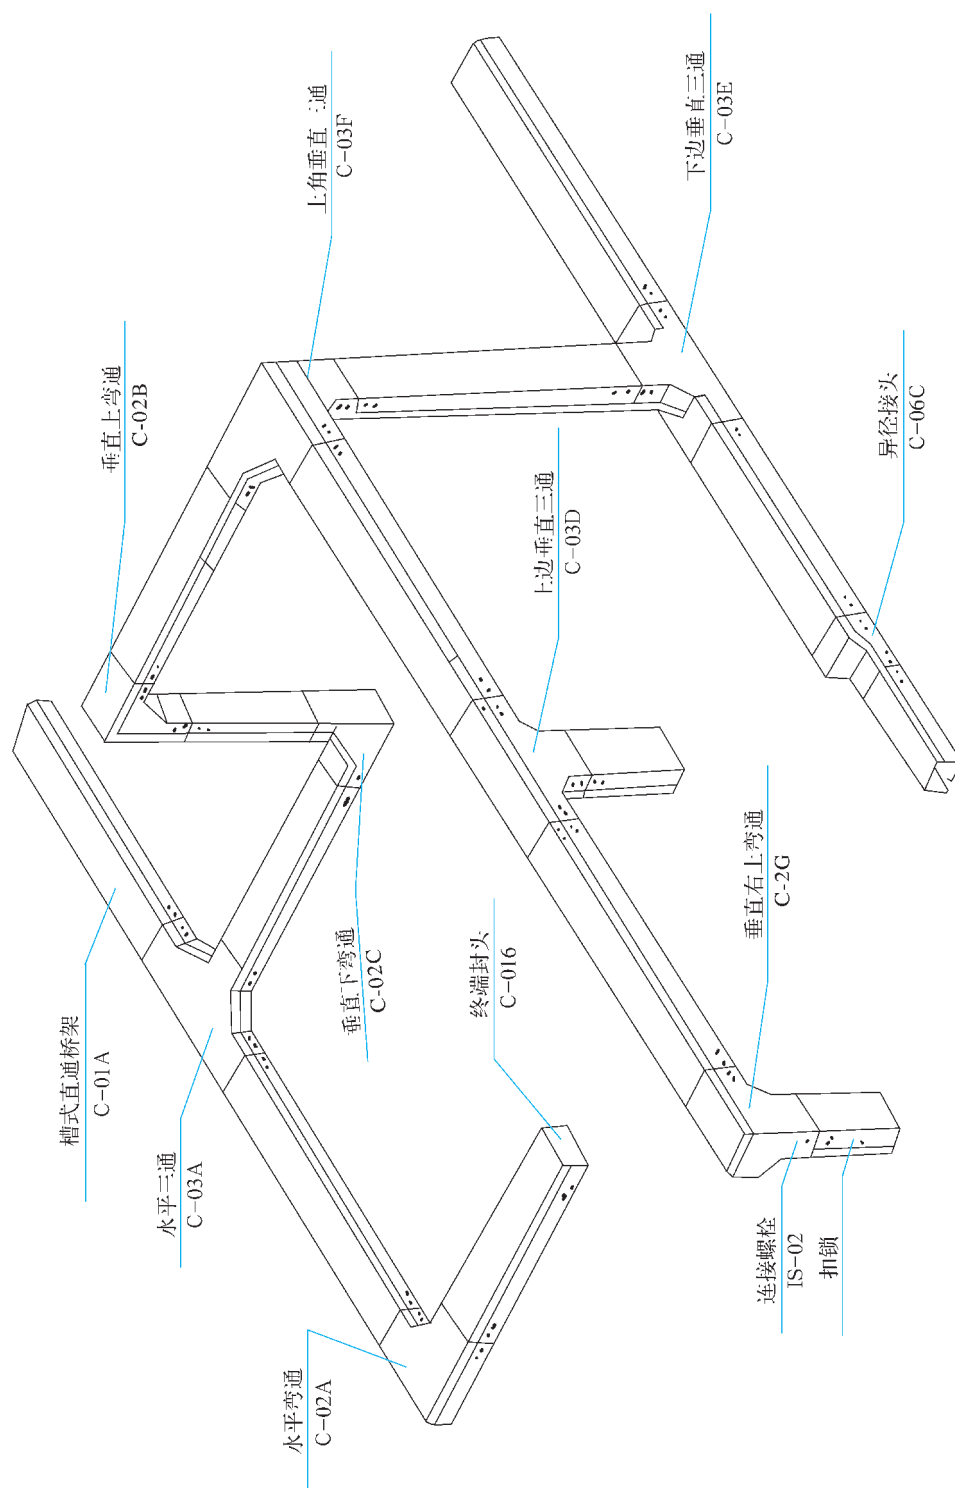




组合式桥架空间布置示意图

Space Layout Sketch Map of Combination Type Cable Tray

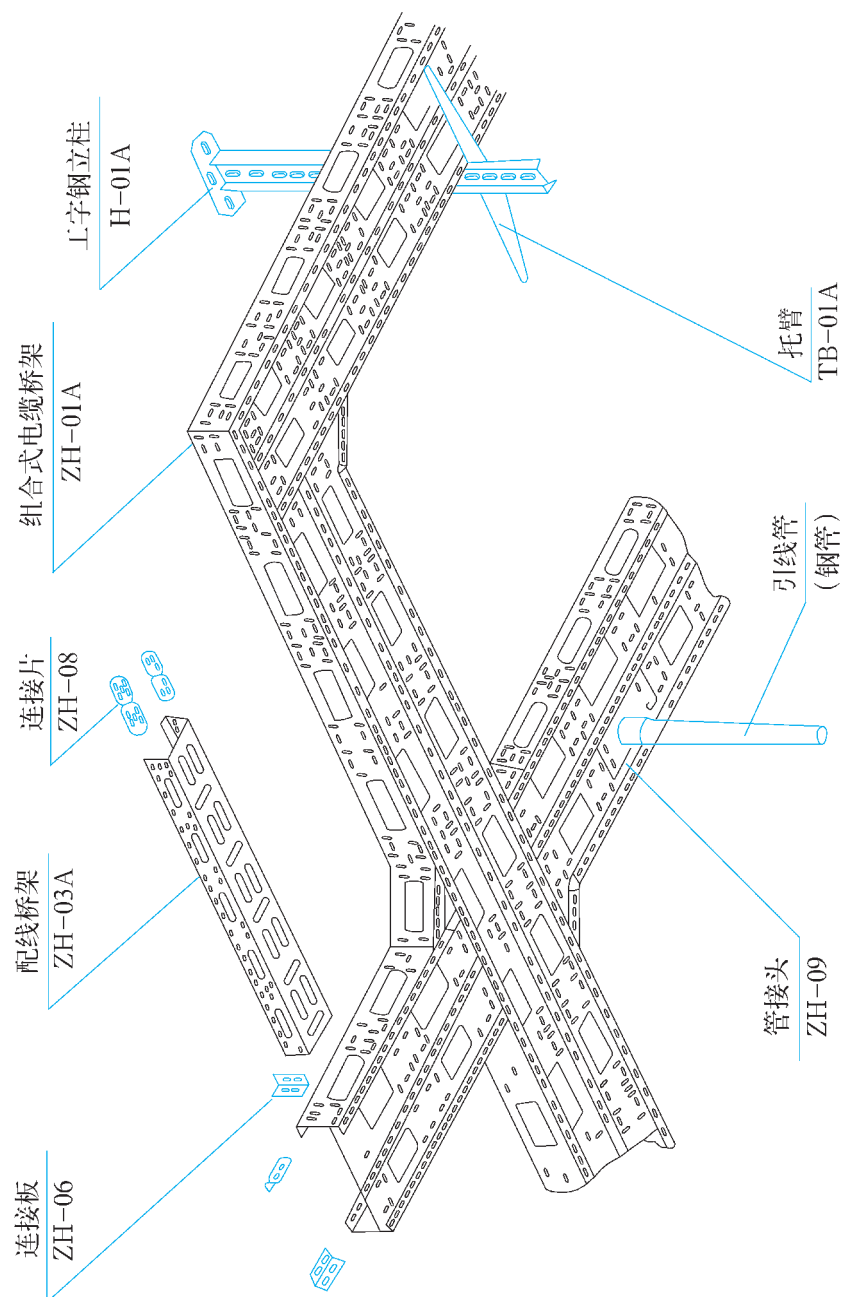

电缆桥架型号表示方法

Indication of Types of Cable Trays

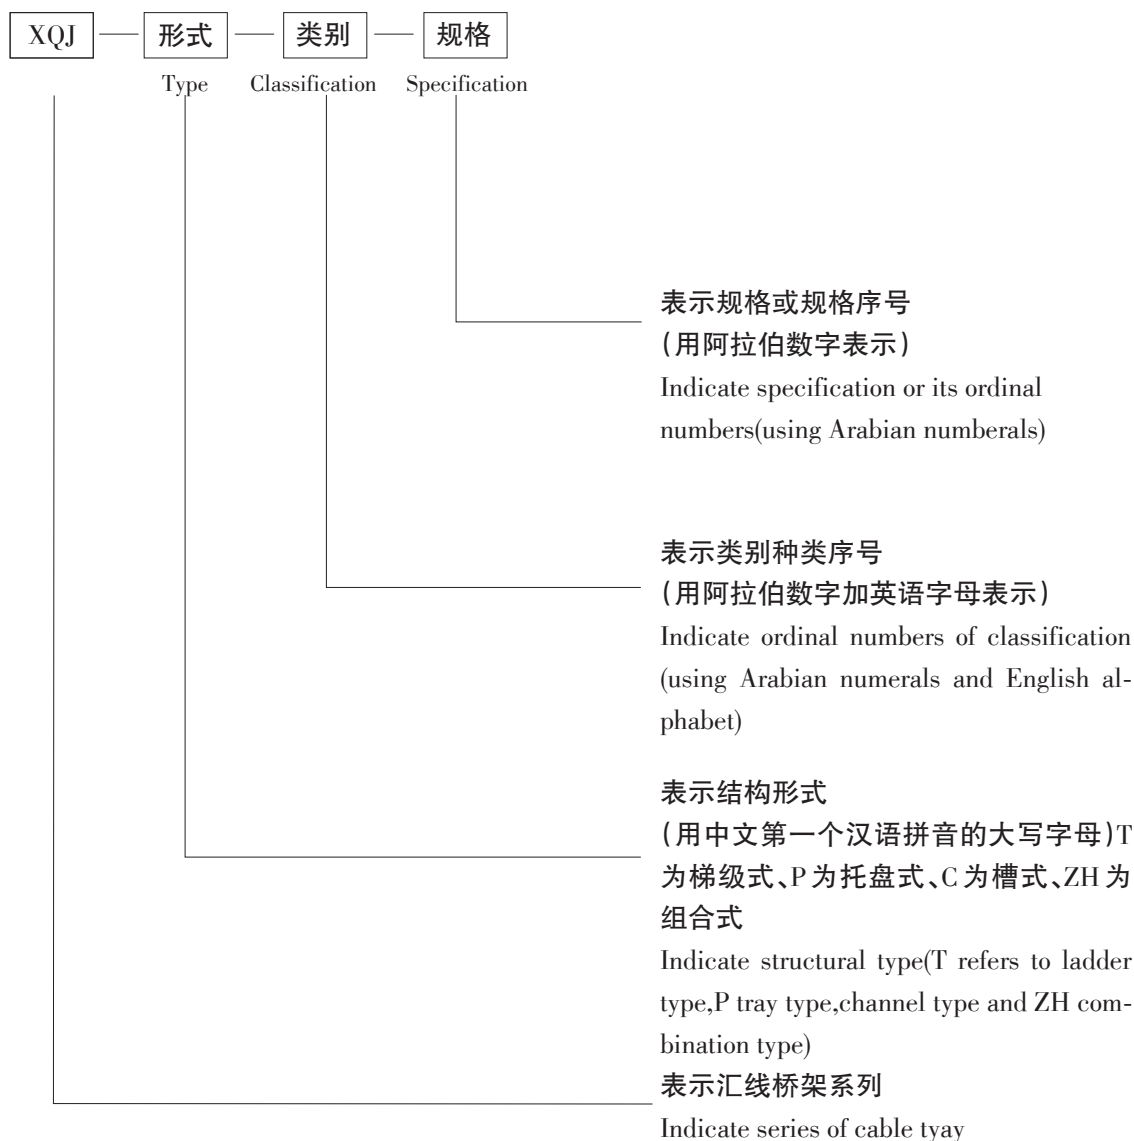

注:此样本中支架部分型号与旧样本型号略有更改,但两型号同样可以订货。

Note: Models of some supports in this edition are modified from those in past editions. Both models are acceptable for order.



大跨距电缆汇线桥架

Cable for combination with large spans

XQJ-DJ

大跨距桥架


Large span Cable Tray

槽式、托盘式、梯级式载荷曲线

(A)型

Load diagram of Channel-type, tray-type and ladder-type

(A type)

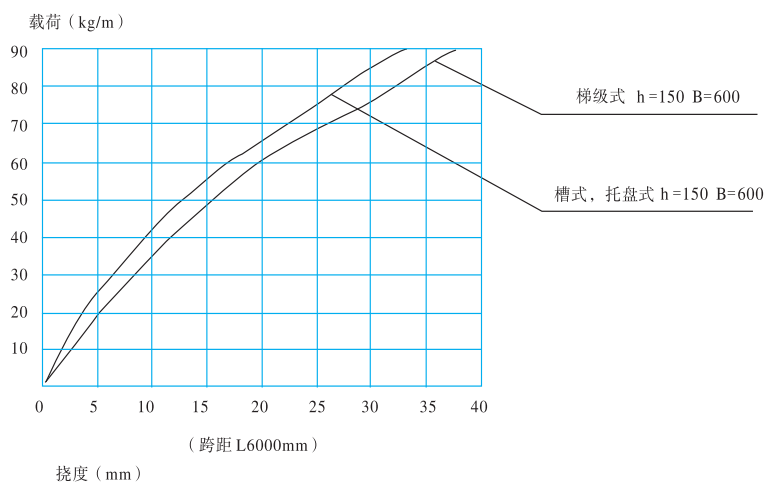

DJ大跨距电缆汇线桥架可分为梯级多、托盘式、槽式、分别用T、P、C表示。当跨距 > 6m 或 < 6m 时可接受特殊订货。


DJ Cables for combination with large spans can be divided into ladder-type, tray-type and channel type, which can be represented by T, P, C separately. When the supporting span is 6mm, you can receive special order.

槽式、托盘式、梯级式载荷曲线

(B)型

Load diagram of Channel-type, tray-type and ladder-type


(B type)

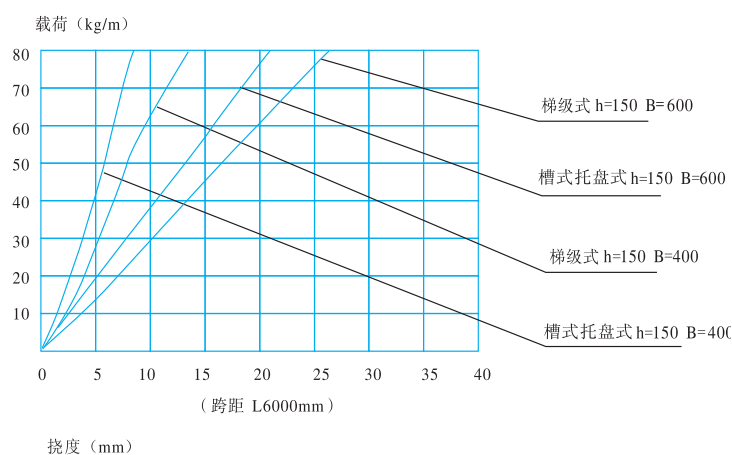

DJ 型梯级式大跨距电缆桥架

Ladder Type Long Span Cable Tray Model DJ

(A 型)

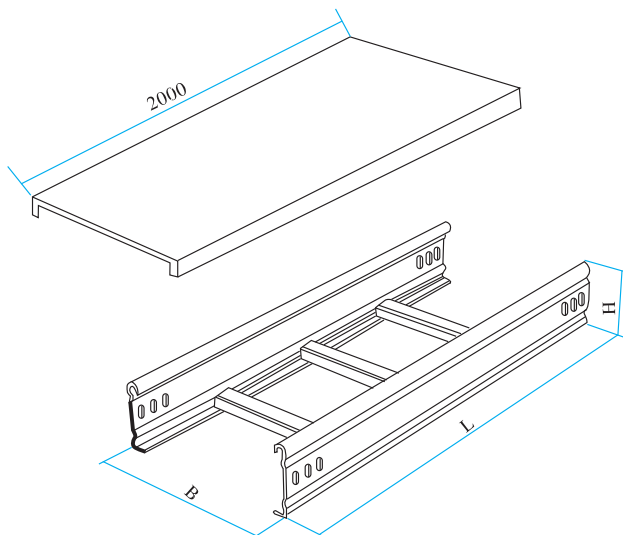

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	重量 kg/节 L=6000	护 罩 Cover
DJ-T-A-6-2	200	60	38.60	8.69
DJ-T-A-6-3	300		40.04	14.60
DJ-T-A-6-4	400		41.5	23.60
DJ-T-A-6-5	500		51.92	26.84
DJ-T-A-6-6	600	100	53.40	38.17
DJ-T-A-10-2	200		52.33	8.69
DJ-T-A-10-3	300		53.63	14.60
DJ-T-A-10-4	400		62.33	23.60
DJ-T-A-10-5	500	150	63.75	26.84
DJ-T-A-10-6	600		65.21	38.17
DJ-T-A-15-2	200		76.28	8.69
DJ-T-A-15-3	300		78.08	14.60
DJ-T-A-15-4	400	200	79.38	23.60
DJ-T-A-15-5	500		91.44	26.84
DJ-T-A-15-6	600		92.92	38.17
DJ-T-A-20-2	200		96.14	8.69
DJ-T-A-20-3	300	200	97.43	14.60
DJ-T-A-20-4	400		98.73	23.60
DJ-T-A-20-5	500		100.04	26.84
DJ-T-A-20-6	600		101.34	38.17
DJ-T-A-20-8	800		104.00	50.05

DJ 型梯级式大跨距电缆桥架

Ladder Type Long Span Cable Tray Model DJ

(B 型)

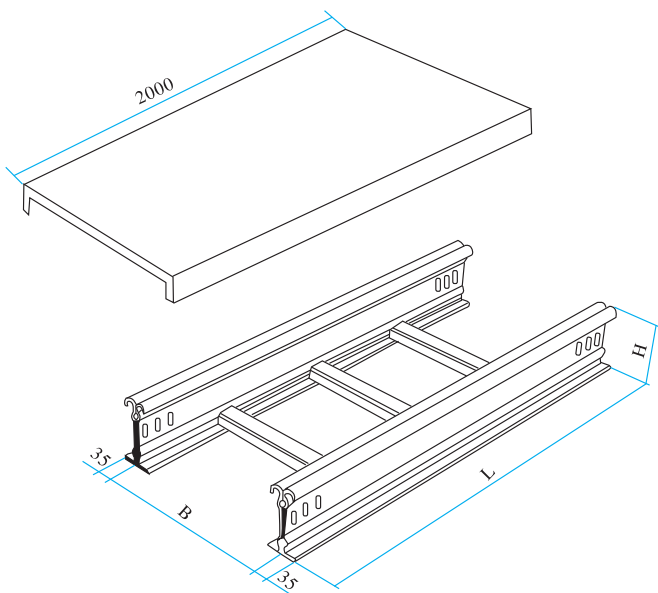

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.


型 号 Model	宽 度 B	高 度 H	重量 kg/节 L=6000	护 罩 Cover
DJ-T-B-6-2	200	60	74.30	10.20
DJ-T-B-6-3	300		69.44	16.10
DJ-T-B-6-4	400		70.90	25.10
DJ-T-B-6-5	500		81.32	28.40
DJ-T-B-6-6	600	100	82.80	29.70
DJ-T-B-10-2	200		98.81	10.20
DJ-T-B-10-3	300		100.11	16.10
DJ-T-B-10-4	400		108.81	25.10
DJ-T-B-10-5	500	150	110.23	28.40
DJ-T-B-10-6	600		111.69	29.70
DJ-T-B-15-2	200		146.08	10.20
DJ-T-B-15-3	300		147.38	16.10
DJ-T-B-15-4	400	200	148.68	25.10
DJ-T-B-15-5	500		160.74	28.40
DJ-T-B-15-6	600		162.22	29.70
DJ-T-B-20-2	200		183.5	10.20
DJ-T-B-20-3	300	200	184.79	16.10
DJ-T-B-20-4	400		186.09	25.10
DJ-T-B-20-5	500		187.40	28.40
DJ-T-B-20-6	600		188.70	29.70
DJ-T-B-20-8	800		191.36	51.60



DJ 型托盘式大跨距电缆桥架

Tray Type Long Span Cable Tray Model DJ

(A 型)

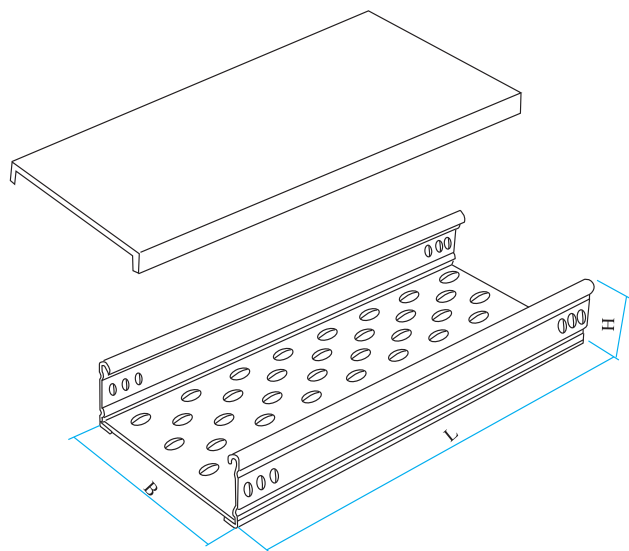

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000	护罩 Cover
DJ-P-A-6-2	200	60	67.33	8.69
DJ-P-A-6-3	300		83.74	14.60
DJ-P-A-6-4	400		115.77	23.60
DJ-P-A-6-5	500		135.80	26.84
DJ-P-A-6-6	600		155.80	38.17
DJ-P-A-10-2	200	100	88.47	8.69
DJ-P-A-10-3	300		104.48	14.60
DJ-P-A-10-4	400		136.51	23.60
DJ-P-A-10-5	500		156.54	26.84
DJ-P-A-10-6	600		176.55	38.17
DJ-P-A-15-2	200	150	116.18	8.69
DJ-P-A-15-3	300		132.19	14.60
DJ-P-A-15-4	400		164.22	23.60
DJ-P-A-15-5	500		184.25	26.84
DJ-P-A-15-6	600		204.26	38.17
DJ-P-A-20-2	200	200	138.11	8.69
DJ-P-A-20-3	300		154.12	14.60
DJ-P-A-20-4	400		186.15	23.60
DJ-P-A-20-5	500		206.18	26.84
DJ-P-A-20-6	600		226.19	38.17
DJ-P-A-20-8	800		266.22	50.55

DJ 型托盘式大跨距电缆桥架

Tray Type Long Span Cable Tray Model DJ

(B 型)

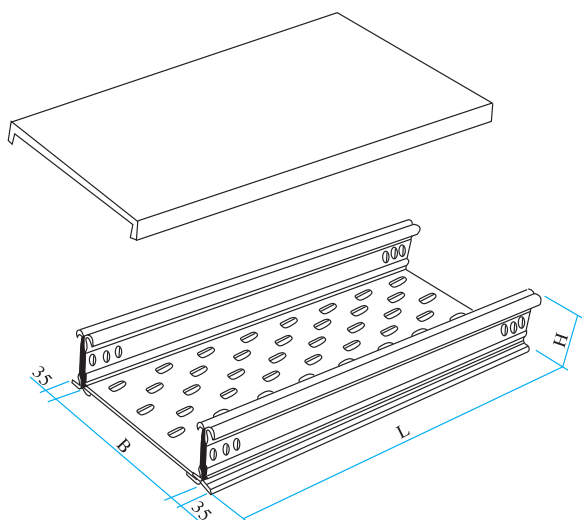

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000	护罩 Cover
DJ-P-B-6-2	200	60	103.43	10.20
DJ-P-B-6-3	300		119.44	16.10
DJ-P-B-6-4	400		151.47	25.10
DJ-P-B-6-5	500		171.50	28.40
DJ-P-B-6-6	600		191.50	29.70
DJ-P-B-10-2	200	100	144.91	10.20
DJ-P-B-10-3	300		160.92	16.20
DJ-P-B-10-4	400		192.95	25.10
DJ-P-B-10-5	500		212.98	28.40
DJ-P-B-10-6	600		232.99	29.70
DJ-P-B-15-2	200	150	200.33	10.20
DJ-P-B-15-3	300		216.34	16.10
DJ-P-B-15-4	400		248.37	25.10
DJ-P-B-15-5	500		268.40	28.40
DJ-P-B-15-6	600		288.41	29.70
DJ-P-B-20-2	200	200	244.19	10.20
DJ-P-B-20-3	300		260.20	16.10
DJ-P-B-20-4	400		292.23	25.10
DJ-P-B-20-5	500		312.26	28.40
DJ-P-B-20-6	600		332.27	29.70
DJ-P-B-20-8	800		372.30	51.60

DJ 型槽式大跨距电缆桥架

Channel Type Long Span Cable Tray Model DJ

(A 型)

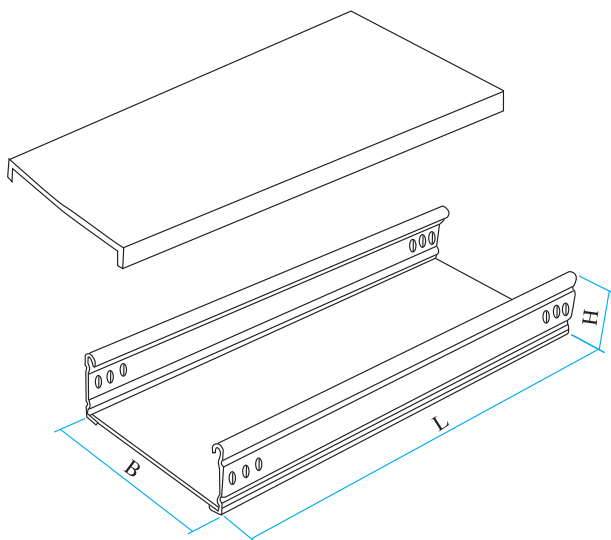

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量 kg/节 L=6000	护罩 Cover
DJ-C-A-6-2	200	60	67.33	8.69
DJ-C-A-6-3	300		83.74	14.60
DJ-C-A-6-4	400		115.77	23.60
DJ-C-A-6-5	500		135.80	26.84
DJ-C-A-6-6	600		155.80	38.17
DJ-C-A-10-2	200	100	88.47	8.69
DJ-C-A-10-3	300		104.48	14.60
DJ-C-A-10-4	400		136.51	23.60
DJ-C-A-10-5	500		156.54	26.84
DJ-C-A-10-6	600		176.55	38.17
DJ-C-A-15-2	200	150	116.18	8.69
DJ-C-A-15-3	300		132.19	14.60
DJ-C-A-15-4	400		164.22	23.60
DJ-C-A-15-5	500		184.25	26.84
DJ-C-A-15-6	600		204.26	38.17
DJ-C-A-20-2	200	200	138.11	8.69
DJ-C-A-20-3	300		154.12	14.60
DJ-C-A-20-4	400		186.15	23.60
DJ-C-A-20-5	500		206.18	26.84
DJ-C-A-20-6	600		226.19	38.17
DJ-C-A-20-8	800		266.22	50.55

DJ 型槽式大跨距电缆桥架

Channel Type Long Span Cable Tray Model DJ

(B 型)

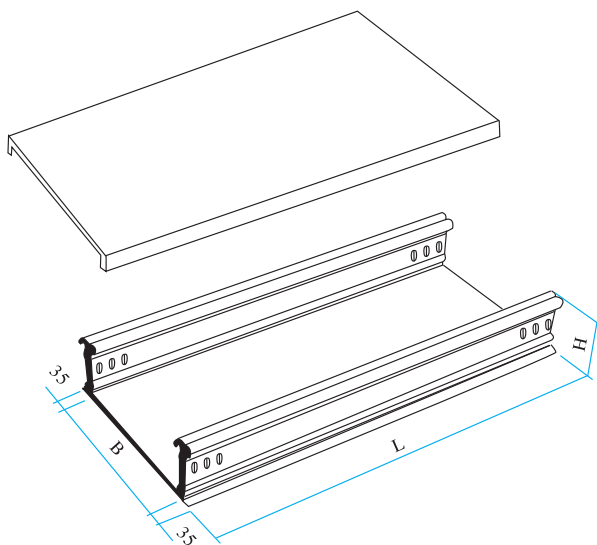

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量 kg/节 L=6000	护罩 Cover
DJ-C-B-6-2	200	60	103.43	10.20
DJ-C-B-6-3	300		119.44	16.10
DJ-C-B-6-4	400		151.47	25.10
DJ-C-B-6-5	500		171.50	28.40
DJ-C-B-6-6	600		191.50	29.70
DJ-C-B-10-2	200	100	144.91	10.20
DJ-C-B-10-3	300		160.92	16.10
DJ-C-B-10-4	400		192.95	25.10
DJ-C-B-10-5	500		212.98	28.40
DJ-C-B-10-6	600		232.99	29.70
DJ-C-B-15-2	200	150	200.33	10.20
DJ-C-B-15-3	300		216.34	16.10
DJ-C-B-15-4	400		248.37	25.10
DJ-C-B-15-5	500		368.40	28.40
DJ-C-B-15-6	600		288.41	29.70
DJ-C-B-20-2	200	200	244.19	10.20
DJ-C-B-20-3	300		260.20	16.10
DJ-C-B-20-4	400		292.23	25.10
DJ-C-B-20-5	500		312.26	28.40
DJ-C-B-20-6	600		332.27	29.70
DJ-C-B-20-8	800		372.30	51.60



梯级式电缆桥架

Ladder – type Cable

XQJ-T₁

XQJ-T₁ 型梯级式电缆桥架具有重量轻、成本低、造型别具、安装方便、散热、透气性好等优点。它适用于一般直径较大电缆的敷设,特别适用于高、低压动力电缆的敷设。

XQJ-T₁ type of cables such advantages as light weight. Low cost, special modelling, convenient installation and good cooling and ventilation.


It is suitable for the laying of the cables with bigger diameter, especially suitable for the Laying of the power cables with high or Low voltage.

梯级式桥架

Ladder-span Cable Tray


梯级式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximully-permitted uniform Load of Ladder-type cable under different spans

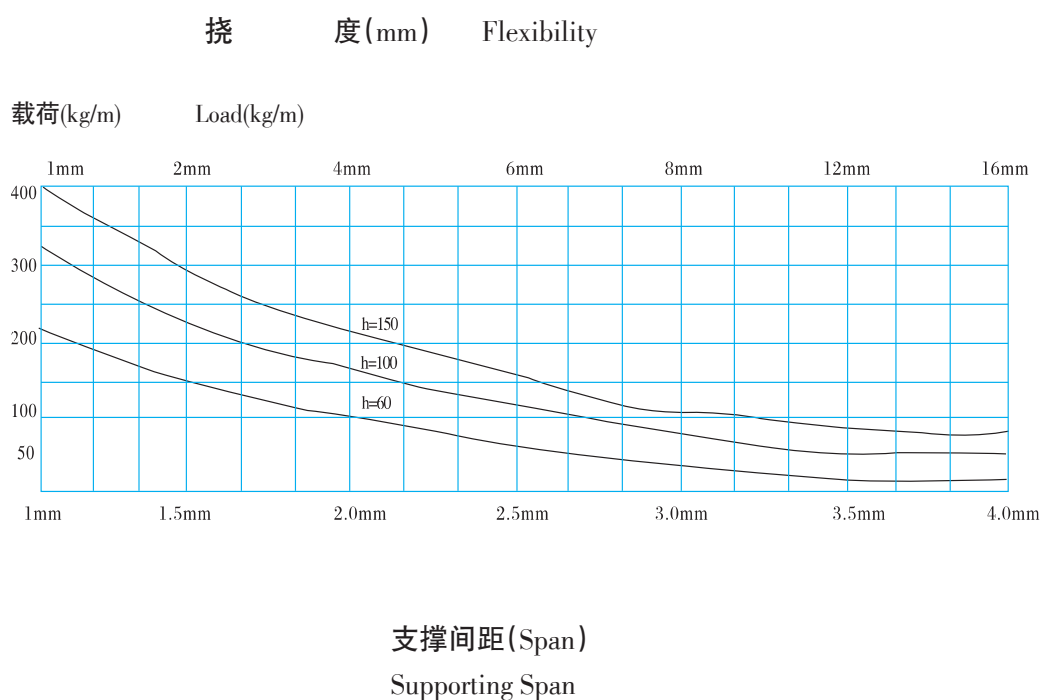

梯级式直通桥架 XQJ-T1-01

Type Straight Cable Tray Model XQJ-T1-01

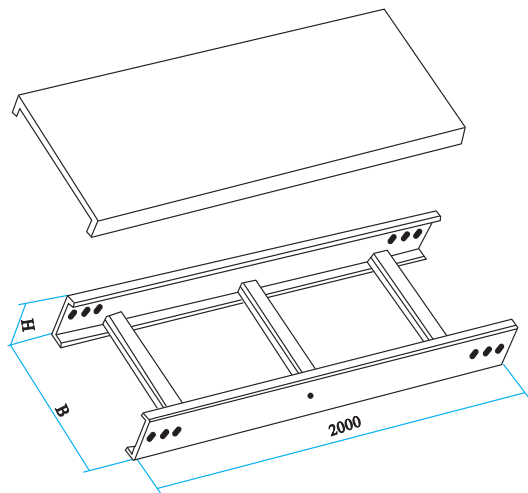


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	重量 kg Weight	护 罩 Weight	备 注 Remark
T1-01-6-2	200	60	11.49	8.69	当 H=60 H=100 时，每端 各 6 只连 接孔
T1-01-10-2		100	18.18		
T1-01-15-2		150	24.09		
T1-01-6-3	300	60	12.69	14.6	
T1-01-10-3		100	18.19		
T1-01-15-3		150	25.38		
T1-01-6-4	400	60	15.07	23.6	当 H=150 时，每端 各 12 只连 接孔
T1-01-10-4		100	20.79		
T1-01-15-4		150	26.69		
T1-01-6-5	500	60	16.3	26.84	
T1-01-10-5		100	22.09		
T1-01-15-5		150	27.99		
T1-01-6-6	600	60	18.1	38.17	
T1-01-10-6		100	23.4		
T1-01-15-6		150	29.31		
T1-01-6-8	800	60	21.3	50.05	
T1-01-10-8		100	26.01		
T1-01-15-8		150	31.92		

梯级式水平弯通 XQJ-T1-02

Ladder Type Horizontal Elbow Joint Cable Tray Model XQJ-T1-02

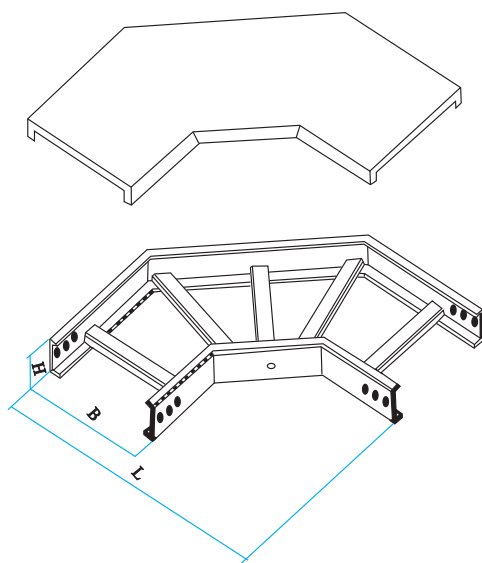

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
T1-02-6-2	200	60	500	5.85	4.28	当 H=60 H=100 时，每端 各 6 只连 接孔
T1-02-10-2		100		7.5		
T1-02-15-2		150		10.92		
T1-02-6-3	300	60	600	7.29	6.63	
T1-02-10-3		100		9.09		
T1-02-15-3		150		13.26		
T1-02-6-4	400	60	700	8.7	12.42	当 H=150 时，每端 各 12 只连 接孔
T1-02-10-4		100		10.74		
T1-02-15-4		150		15.15		
T1-02-6-5	500	60	800	10.18	15.27	
T1-02-10-5		100		12.39		
T1-02-15-5		150		17.04		
T1-02-6-6	600	60	900	11.6	21.28	
T1-02-10-6		100		14		
T1-02-15-6		150		18.9		
T1-02-6-8	800	60	1100	16.34	32.75	
T1-02-10-8		100		17.31		
T1-02-15-8		150		22.7		



梯级式水平三通 XQJ-T1-03

Ladder Type Horizontal T-joint Cable Tray Model XQJ-T1-03

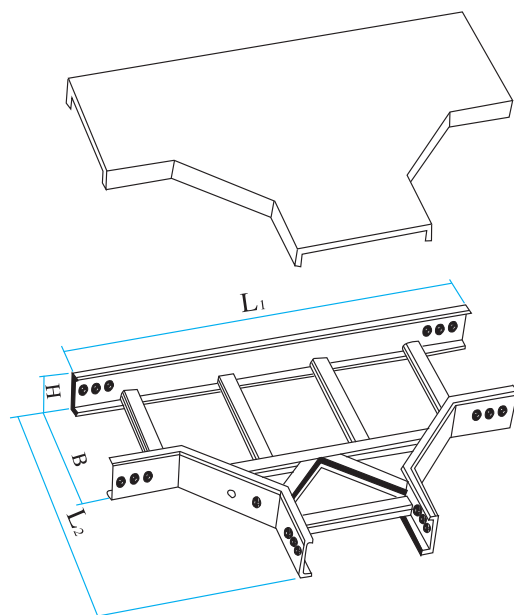


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L1	L2	重量 kg Weight	护 罩 Weight	备 注 Remark
T1-03-6-2	200	60	800	500	8.28	7.08	当 H=60 H=100 时，每端 各 6 只连 接孔
T1-03-10-2		100			9.68		
T1-03-15-2		150			13.2		
T1-03-6-3	300	60	900	600	9.86	10.34	
T1-03-10-3		100			12.86		
T1-03-15-3		150			15.57		
T1-03-6-4	400	60	1000	700	12.5	19.54	
T1-03-10-4		100			14.55		
T1-03-15-4		150			17.42		
T1-03-6-5	500	60	1100	800	13.2	24.41	当 H=150 时，每端 各 12 只连 接孔
T1-03-10-5		100			16.24		
T1-03-15-5		150			20.18		
T1-03-6-6	600	60	1200	900	15.3	32.57	
T1-03-10-6		100			17.74		
T1-03-15-6		150			20.85		
T1-03-6-8	800	60	1400	1100	18.5	44.00	
T1-03-10-8		100			21.48		
T1-03-15-8		150			28.3		

梯级式水平四通 XQJ-T1-04

Ladder Type Horizontal Cross Cable Tray Model XQJ-T1-04

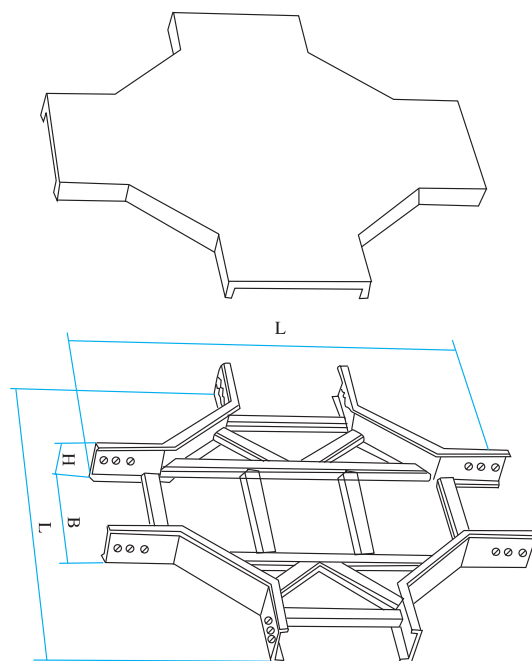


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
T1-04-6-2	200	60	800	10.05	10.24	当 H=60 H=100 时，每 端 各 6 只 连 接孔
T1-04-10-2		100		13.9		
T1-04-15-2		150		20.3		
T1-04-6-3	300	60	900	13.45	13.57	
T1-04-10-3		100		15.3		
T1-04-15-3		150		22.5		
T1-04-6-4	400	60	1000	15.23	24.06	当 H=150 时，每 端 各 12 只连 接孔
T1-04-10-4		100		17.54		
T1-04-15-4		150		25.3		
T1-04-6-5	500	60	1100	17.34	30.51	
T1-04-10-5		100		19.25		
T1-04-15-5		150		28.48		
T1-04-6-6	600	60	1200	19.89	33.76	
T1-04-10-6		100		22.54		
T1-04-15-6		150		32.9		
T1-04-6-8	800	60	1400	24.45	53.01	
T1-04-10-8		100		26.35		
T1-04-15-8		150		36.72		

梯级式垂直凹弯通 XQJ-T1-05A

Ladder Type Horizontal Concave Elbow Joint Cable Tray Model XQJ-T1-05A

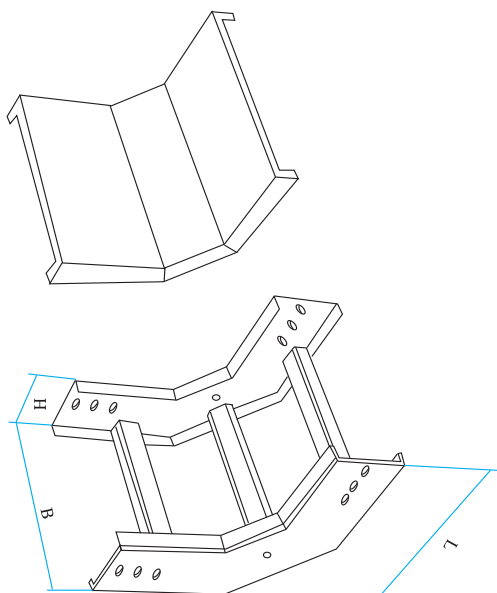


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
T1-05A-6-2	200	60	360	4.1	3.43	当 H=60 H=100 时，每端 各 6 只连 接孔
T1-05A-10-2		100	400	5.93		
T1-05A-15-2		150	450	10.29		
T1-05A-6-3	300	60	360	5.07	4.85	
T1-05A-10-3		100	400	7.68		
T1-05A-15-3		150	450	10.95		
T1-05A-6-4	400	60	360	5.89	8.38	当 H=150 时，每端 各 12 只连 接孔
T1-05A-10-4		100	400	8.5		
T1-05A-15-4		150	450	11.85		
T1-05A-6-5	500	60	360	6.71	9.53	
T1-05A-10-5		100	400	9.32		
T1-05A-15-5		150	450	12.72		
T1-05A-6-6	600	60	360	7.52	11.41	
T1-05A-10-6		100	400	10.13		
T1-05A-15-6		150	450	13.53		
T1-05A-6-8	800	60	360	9.16	14.78	
T1-05A-10-8		100	400	11.77		
T1-05A-15-8		150	450	15.18		

梯级式垂直凸弯通 XQJ-T1-05B

Ladder Type Vertical Elbow Joint Cable Tray Model XQJ-T1-05B

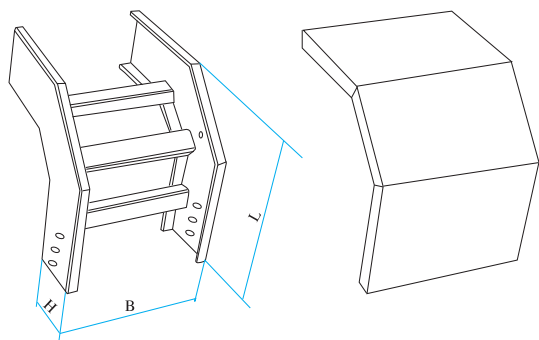

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
T1-05B-6-2	200	60	360	5.31	4.26	当H=60 H=100 时，每端 各6只连 接孔
T1-05B-10-2		100	400	6.85		
T1-05B-15-2		150	550	10.9		
T1-05B-6-3	300	60	360	6.36	6.5	
T1-05B-10-3		100	400	7.9		
T1-05B-15-3		150	550	11.98		
T1-05B-6-4	400	60	360	7.41	11.12	当H=150 时，每端 各12只连 接孔
T1-05B-10-4		100	400	8.96		
T1-05B-15-4		150	550	13		
T1-05B-6-5	500	60	360	8.46	12.64	
T1-05B-10-5		100	400	10		
T1-05B-15-5		150	550	14.08		
T1-05B-6-6	600	60	360	9.51	16.01	
T1-05B-10-6		100	400	11.01		
T1-05B-15-6		150	550	15.14		
T1-05B-6-8	800	60	360	11.61	20.78	
T1-05B-10-8		100	400	13.16		
T1-05B-15-8		150	550	17.24		



梯级式垂直转动弯通 XQJ-T1-05C

Ladder Type Vertical Turn Elbow Joint Cable Tray Model XQJ-T1-05C

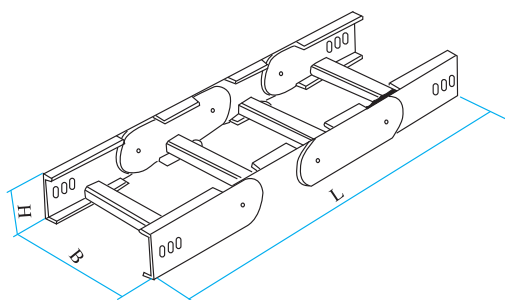

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
T1-05C-6-2	200	60	780	7.17	3.77	当 H=60 H=100 时,每端 各 6 只连 接孔
T1-05C-10-2		100	900	11.28	4.35	
T1-05C-15-2		150	1050	19.77	5.07	
T1-05C-6-3	300	60	780	9.37	6.33	
T1-05C-10-3		100	900	12.19	7.31	
T1-05C-15-3		150	1050	20.45	8.53	
T1-05C-6-4	400	60	780	8.15	10.25	当 H=150 时,每端 各 12 只连 接孔
T1-05C-10-4		100	900	12.32	11.82	
T1-05C-15-4		150	1050	22.89	13.79	
T1-05C-6-5	500	60	780	9.95	12.56	
T1-05C-10-5		100	900	12.38	14.49	
T1-05C-15-5		150	1050	23.64	16.91	
T1-05C-6-6	600	60	780	13.54	17.86	当 H=150 时,每端 各 12 只连 接孔
T1-05C-10-6		100	900	16.85	20.61	
T1-05C-15-6		150	1050	25.27	24.05	
T1-05C-6-8	800	60	780	14.52	23.42	
T1-05C-10-8		100	900	17.46	27.03	
T1-05C-15-8		150	1050	25.88	31.53	

梯级式桥架

Ladder-span Cable Tray

托盘式电缆桥架

Tray-type Cable

XQJ-P1


XQJ-P1 型托盘式电缆桥架具有重量轻、荷载大、造型美观、结构简单、安装方便等优点,是石油、化工、电力、轻工、电视、电讯等方面应用最广泛的一种。它既适用动力电缆的安装,也适用于控制电缆的敷设。

XQJ-P1 type of cables has such advantages as Light weight, heavy Load, beautiful modelling, simple structure and convenient installation, widely-used in the fields of oil, chemical industry, electric power, Light industry, television and telecommunications, and also suitable for not only the installation of the power cable, but for the Laying of the control cable.

托盘式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximumly-permitted uniform Load of Tray-type cable under different spans

挠度 (mm) Flexibility

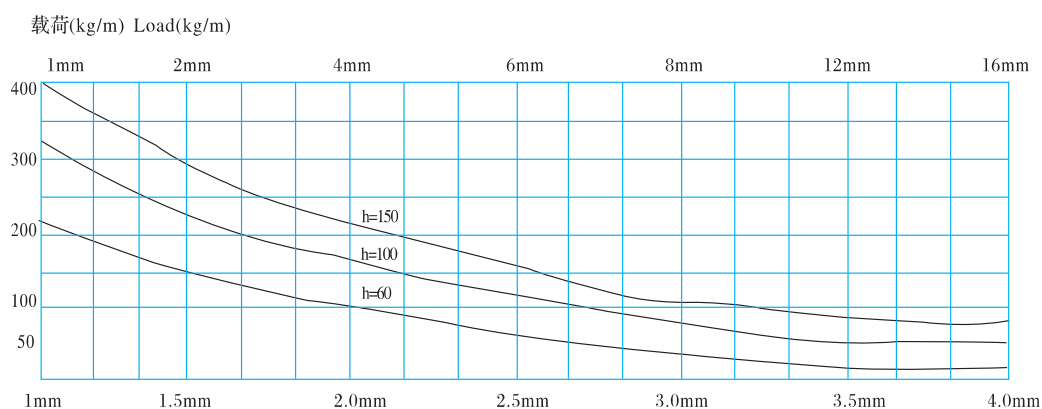


支撑间距 (Span)

Supporting(Span)

托盘式直通桥架 XQJ-P1-01

Tray Type Straight Cable Tray Model XQJ-P1-01

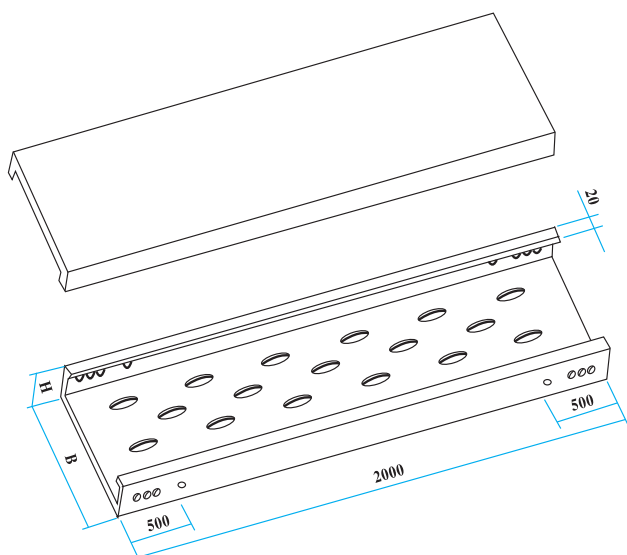


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	重量 kg Weight	护 罩 Weight	备 注 Remark
P1-01-6-2	200	60	16.85	8.69	当 H=60 H=100 时，每端 各 6 只连 接孔
P1-01-10-2		100	20.76		
P1-01-15-2		150	25.68		
P1-01-6-3	300	60	21.22	14.60	
P1-01-10-3		100	25.68		
P1-01-15-3		150	30.6		
P1-01-6-4	400	60	26.64	23.60	
P1-01-10-4		100	38.28		
P1-01-15-4		150	49.01		
P1-01-6-5	500	60	45.5	26.84	当 H=150 时，每端 各 12 只连 接孔
P1-01-10-5		100	50.67		
P1-01-15-5		150	57.22		
P1-01-6-6	600	60	52.14	38.17	
P1-01-10-6		100	60.71		
P1-01-15-6		150	63.7		
P1-01-6-8	800	60	65.39	50.05	
P1-01-10-8		100	70.59		
P1-01-15-8		150	77.22		

托盘式水平弯通 XQJ-P1-02

Tray Type Horizontal Elbow Jiont Cable Tray Model XQJ-P1-02

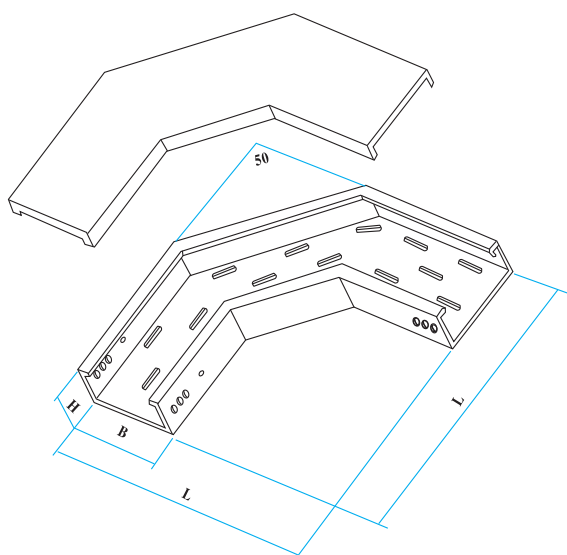


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
P1-02-6-2	200	60	500	6.72	3.47	当 H=60 H=100 时，每端 各 6 只连 接孔
P1-02-10-2		100		7.95		
P1-02-15-2		150		10.47		
P1-02-6-3	300	60	600	9.23	6.14	
P1-02-10-3		100		10.65		
P1-02-15-3		150		13.65		
P1-02-6-4	400	60	700	13.2	10.36	当 H=150 时，每端 各 12 只连 接孔
P1-02-10-4		100		18.6		
P1-02-15-4		150		22.8		
P1-02-6-5	500	60	800	22.44	14.56	
P1-02-10-5		100		24.96		
P1-02-15-5		150		31.9		
P1-02-6-6	600	60	900	28.08	21.28	
P1-02-10-6		100		30.84		
P1-02-15-6		150		1000		
P1-02-6-8	800	60	1100	40.89	32.75	
P1-02-10-8		100		44.14		
P1-02-15-8		150		1200		

托盘式水平三通 XQJ-P1-03

Tray Type Horizontal T-joint Cable Tray Model XQJ-P1-03

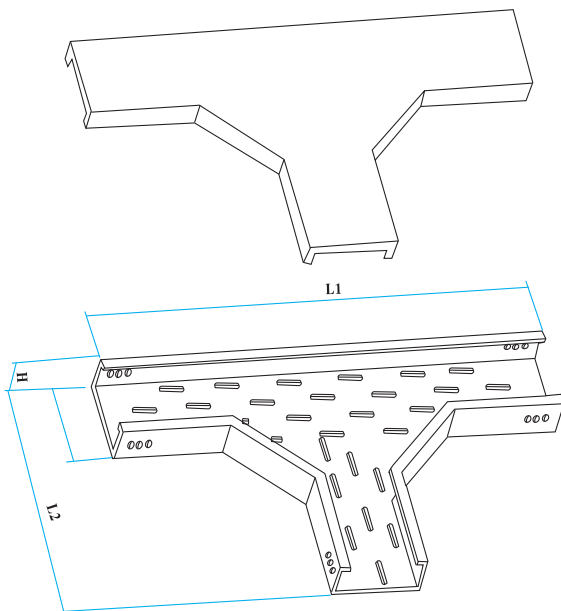


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L1	L2	重量 kg Weight	护 罩 Weight	备 注 Remark
P1-03-6-2	200	60	800	500	10.95	5.1	当 H=60 H=100 时，每端 各 6 只连 接孔
P1-03-10-2		100			13.54		
P1-03-15-2		150			20.1		
P1-03-6-3	300	60	900	600	15.6	11.2	
P1-03-10-3		100			18.3		
P1-03-15-3		150			24.5		
P1-03-6-4	400	60	900	600	24.28	13.2	
P1-03-10-4		100			27.95		
P1-03-15-4		150			1000		
P1-03-6-5	500	60	1100	800	30.6	17.94	当 H=150 时，每端 各 12 只连 接孔
P1-03-10-5		100			34.5		
P1-03-15-5		150			1100		
P1-03-6-6	600	60	1200	900	38.5	27.55	
P1-03-10-6		100			42.5		
P1-03-15-6		150			900		
P1-03-6-8	800	60	1400	1100	56.1	39.29	
P1-03-10-8		100			59.5		
P1-03-15-8		150			1100		

托盘式水平四通 XQJ-P1-04

Tray Type Horizontal Cross Cable Tray Model XQJ-P1-04

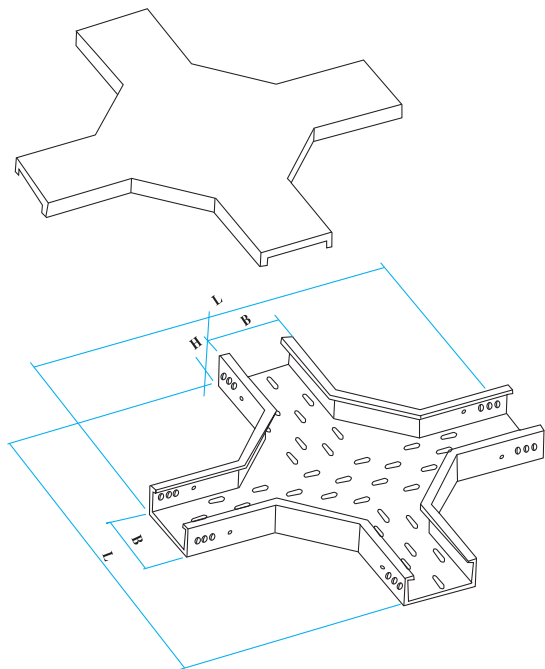


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
P1-04-6-2	200	60	800	12.93	6.74	当 H=60 H=100 时，每端 各 6 只连 接孔
P1-04-10-2		100		16.5		
P1-04-15-2		150		26.1		
P1-04-6-3	300	60	900	19.36	12.99	
P1-04-10-3		100		21.3		
P1-04-15-3		150		30.5		
P1-04-6-4	400	60	1000	28.9	17.8	
P1-04-10-4		100		32.5		
P1-04-15-4		150		43.2		
P1-04-6-5	500	60	1100	34.3	23.13	当 H=150 时，每端 各 12 只连 接孔
P1-04-10-5		100		39.6		
P1-04-15-5		150		53.6		
P1-04-6-6	600	60	1200	45.2	29.87	
P1-04-10-6		100		49.3		
P1-04-15-6		150		62.8		
P1-04-6-8	800	60	1400	64.6	43.21	
P1-04-10-8		100		67.6		
P1-04-15-8		150		82.3		

托盘式垂直凹弯通 XQJ-P1-05A

Tray Type Horizontal Concave Elbow Joint Cable Tray Model XQJ-P1-05A

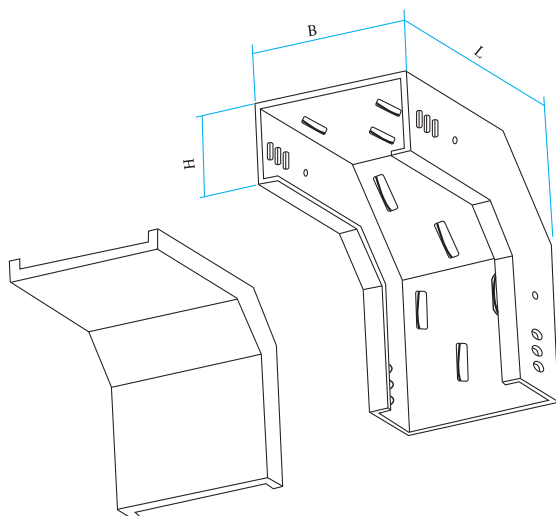


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
P1-05A-6-2	200	60	360	5.98	2.17	当 H=60 H=100 时，每 端 各 6 只 连 接孔
P1-05A-10-2		100	400	7.83		
P1-05A-15-2		150	450	13		
P1-05A-6-3	300	60	360	10.79	3.1	
P1-05A-10-3		100	400	12.78		
P1-05A-15-3		150	450	15.24		
P1-05A-6-4	400	60	360	12.34	4.4	当 H=150 时，每 端 各 12 只连 接孔
P1-05A-10-4		100	400	14.85		
P1-05A-15-4		150	450	19.6		
P1-05A-6-5	500	60	360	13.56	5.39	
P1-05A-10-5		100	400	17.23		
P1-05A-15-5		150	450	23.06		
P1-05A-6-6	600	60	360	24.54	6.4	
P1-05A-10-6		100	400	27.83		
P1-05A-15-6		150	450	33.64		
P1-05A-6-8	800	60	360	32.33	8.44	
P1-05A-10-8		100	400	36.45		
P1-05A-15-8		150	450	45.68		

托盘式垂直凸弯通 XQJ-P1-05B

Tray Type Vertical Elbow Joint Cable Tray Model XQJ-P1-05B

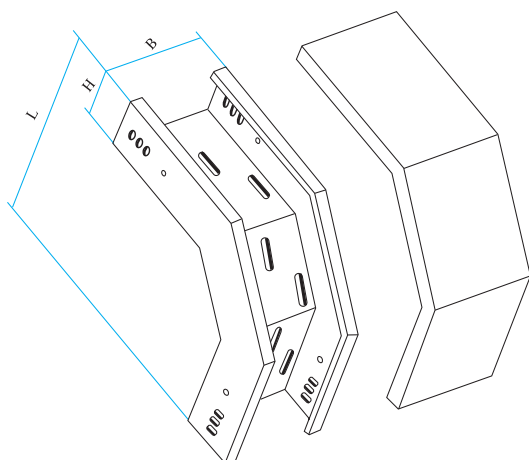


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
P1-05B-6-2	200	60	360	5.54	4.26	当 H=60 H=100 时，每 端 各 6 只 连 接孔
P1-05B-10-2		100	400	7.08		
P1-05B-15-2		150	450	11.91		
P1-05B-6-3	300	60	360	10.01	6.03	
P1-05B-10-3		100	400	11.64		
P1-05B-15-3		150	450	13.53		
P1-05B-6-4	400	60	360	11.65	10.30	当 H=150 时，每 端 各 12 只连 接孔
P1-05B-10-4		100	400	13.25		
P1-05B-15-4		150	450	18.3		
P1-05B-6-5	500	60	360	12.1	12.64	
P1-05B-10-5		100	400	15.45		
P1-05B-15-5		150	450	22.43		
P1-05B-6-6	600	60	360	23.65	16.01	
P1-05B-10-6		100	400	26.59		
P1-05B-15-6		150	450	32.53		
P1-05B-6-8	800	60	360	31.24	20.78	
P1-05B-10-8		100	400	35.21		
P1-05B-15-8		150	450	43.26		

托盘式垂直转动弯通 XQJ-P1-05C

Tray Type Vertical Turn Elbow Joint Cable Tray Model XQJ-P1-05C

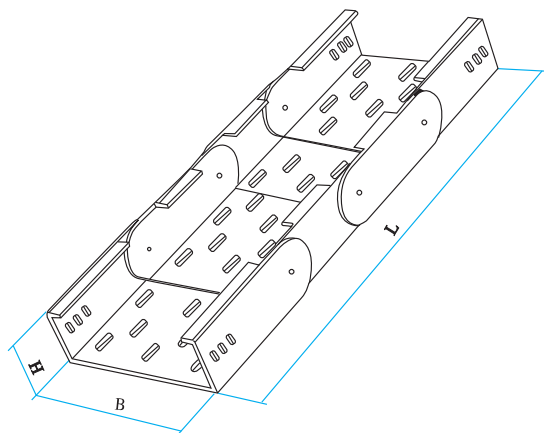
注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Weight	备 注 Remark
P1-05C-6-2	200	60	780	8.2	3.77	当 H=60 H=100 时, 每端 各 6 只 连 接孔
P1-05C-10-2		100	900	12.3	4.35	
P1-05C-15-2		150	1050	19.14	5.07	
P1-05C-6-3	300	60	780	9.61	6.33	
P1-05C-10-3		100	900	13.7	7.31	
P1-05C-15-3		150	1050	21.18	8.53	
P1-05C-6-4	400	60	780	19.27	10.25	当 H=150 时, 每端 各 12 只 连 接孔
P1-05C-10-4		100	900	21.67	11.82	
P1-05C-15-4		150	1050	35.44	13.79	
P1-05C-6-5	500	60	780	21.91	12.56	
P1-05C-10-5		100	900	24.41	14.49	
P1-05C-15-5		150	1050	39.41	16.91	
P1-05C-6-6	600	60	780	24.41	17.86	当 H=150 时, 每端 各 12 只 连 接孔
P1-05C-10-6		100	900	27.13	20.61	
P1-05C-15-6		150	1050	41.64	24.05	
P1-05C-6-8	800	60	780	29.52	23.42	
P1-05C-10-8		100	900	32.57	27.03	
P1-05C-15-8		150	1050	50.22	31.53	



槽式电缆桥架

Channel-Type Cable


XQJ-C

XQJ-C 型槽式电缆桥架是一种全封闭电缆桥架,它适用于敷设计算机电缆、通讯电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果。

XQJ-C type of channel-type cable is fully sealed. It is suitable for Laying computer cable, Communication cable, thermo-coupeI cable and control cable with other sensitive system. It has a good effect on the screen interference of control cable and the protection of cable in heavy corrosion environment.


槽式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximumly-permitted uniform load of channel-type cable under different spans

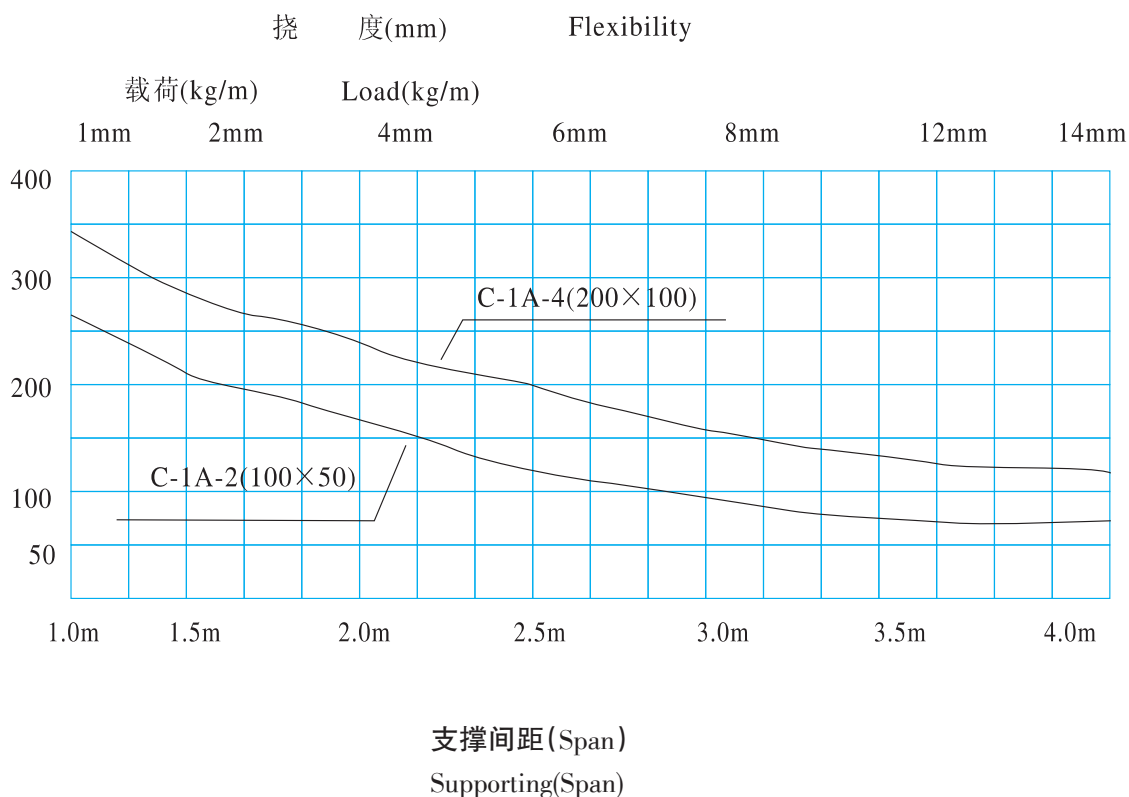

槽式扁形直通桥架 XQJ-C-1A

Channel Type Platoid Straight Cable Tray Model XQJ-C-01A

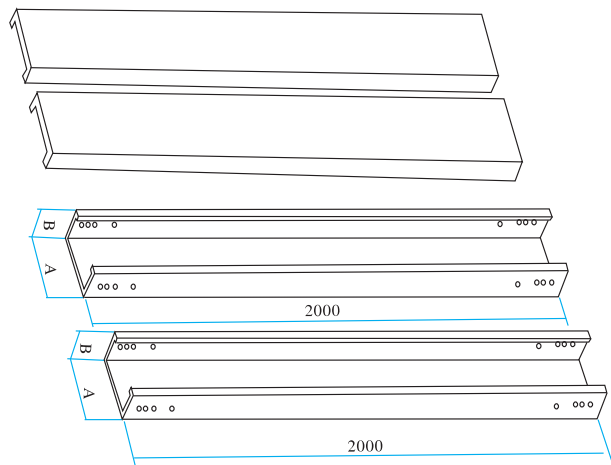


型号 Model	规格 A×B Specification	重量 kg Weight	护罩 Weight	备注 Remark
C-1A-1	50×25	4.81	2.12	当 H > 125 时, 每端各 12 只连接孔
C-1A-2	100×50	8.81	4	
C-1A-3	150×75	12.82	5.8	
C-1A-4	200×100	22.98	8.05	
C-1A-5	250×125	28.92	9.3	
C-1A-6	300×150	41.58	13.53	
C-1A-7	400×200	69.85	21.89	
C-1A-8	500×200	80.41	26.84	
C-1A-9	600×200	86.10	38.17	
C-1A-10	800×200	101.71	58.15	

注: 需配护罩时请注明, 配套扣锁价格另计。

Note: The price of locks is exclusive.

扁形直通桥架终端封头 XQJ-C-1B

Platoid Straight Cable Tray End Blockate Model XQJ-C-01B

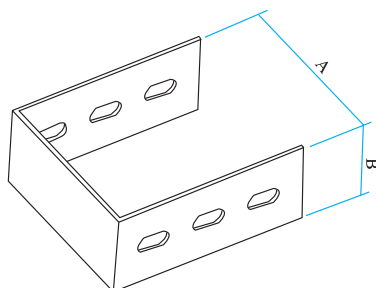


型号 Model	规格 A×B Specification	重量 kg Weight	备注 Remark
C-1B-1	43×18	0.065	当 B ≥ 140 时, 连接孔为双排孔
C-1B-2	93×43	0.182	
C-1B-3	143×68	0.351	
C-1B-4	190×90	0.689	
C-1B-5	240×115	1.0	
C-1B-6	290×140	1.37	
C-1B-7	387×187	2.76	
C-1B-8	487×187	3.24	
C-1B-9	587×187	3.72	
C-1B-10	787×187	4.68	

注: 需配护罩时请注明, 配套扣锁价格另计。

Note: The price of locks is exclusive.

扁形水平等径弯通 XQJ-C-2A

Platoid Horizontal Equant Elbow Joint Cable Tray Model XQJ-C-2A

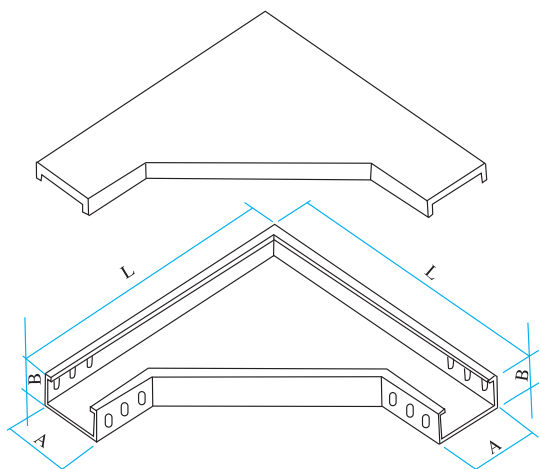

型号 Model	规格 A×B Specification	L	重量 kg Weight	护罩 Weight	备注 Remark
C-2A-1	50×25	350	3.8	1.32	当 H > 125 时, 每端各 12 只连接孔
C-2A-2	100×50	400	5.86	1.9	
C-2A-3	150×75	450	8.43	2.73	
C-2A-4	200×100	500	13.76	3.66	
C-2A-5	250×125	550	17.49	4.62	
C-2A-6	300×150	600	23.51	10.92	
C-2A-7	400×200	700	35.09	21.97	
C-2A-8	500×200	800	46.30	27.21	
C-2A-9	600×200	900	61.00	32.29	
C-2A-10	800×200	1100	82.18	46.7	


注: 需配护罩时请注明, 配套扣锁价格另计。

Note: The price of locks is exclusive.



垂直等径上弯通 XQJ-C-2B

Vertical Equant Upper Elbow Cable Tray Model XQJ-C-2B

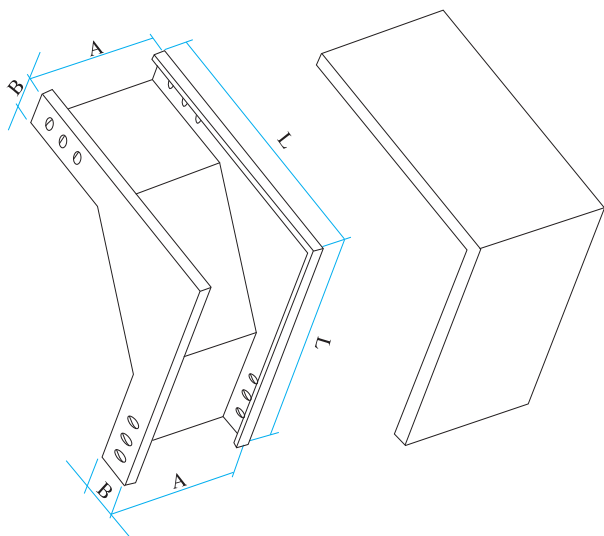


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B Specification	L	重量 kg Weight	护罩 Weight	备注 Remark
C-2B-1	50×25	325	2.71	0.81	当 H > 125 时,每端各 12 只连接 孔
C-2B-2	100×50	350	4.92	1.65	
C-2B-3	150×75	375	6.32	2.52	
C-2B-4	200×100	400	11.67	3.95	
C-2B-5	250×125	425	13.88	4.35	
C-2B-6	300×150	450	18.35	5.59	
C-2B-7	400×200	500	31.77	11.05	
C-2B-8	500×200	500	36.13	13.65	
C-2B-9	600×200	500	40.28	16.12	
C-2B-10	800×200	500	51.69	21.26	

垂直等径下弯通 XQJ-C-2C

Vertical Equant Lower Elbow Jiont Cable Tray Model XQJ-C-2C

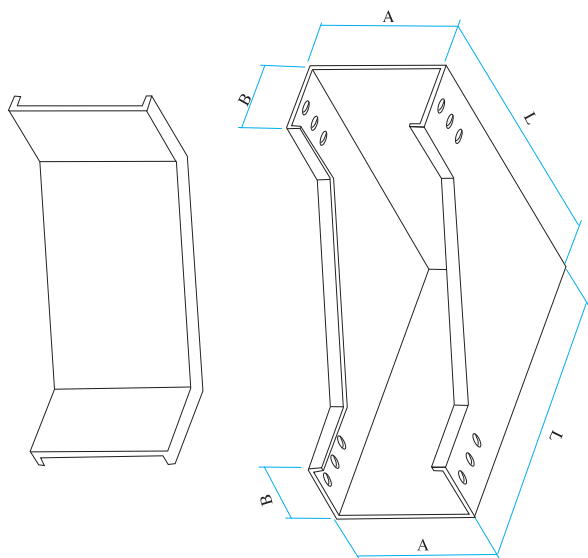


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B Specification	L	重量 kg Weight	护罩 Weight	备注 Remark
C-2C-1	50×25	325	2.52	0.66	当 H > 125 时,每端各 12 只连接 孔
C-2C-2	100×50	350	4.76	1.26	
C-2C-3	150×75	375	6.11	1.9	
C-2C-4	200×100	400	11.30	2.17	
C-2C-5	250×125	425	12.14	2.62	
C-2C-6	300×150	450	17.29	3.1	
C-2C-7	400×200	500	30.25	5.72	
C-2C-8	500×200	500	35.45	7.61	
C-2C-9	600×200	500	39.75	8.32	
C-2C-10	800×200	500	48.25	10.97	


垂直等径左下弯通 XQJ-C-2D

Vertical Equant Left Lower Elbow Jiont Tray Model XQJ-C-2D

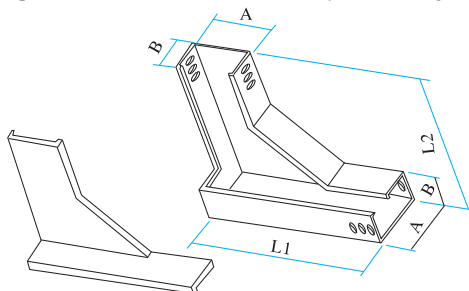

垂直等径右下弯通 XQJ-C-2E

Vertical Equant Right Lower Elbow Jiont Tray Model XQJ-C-2E

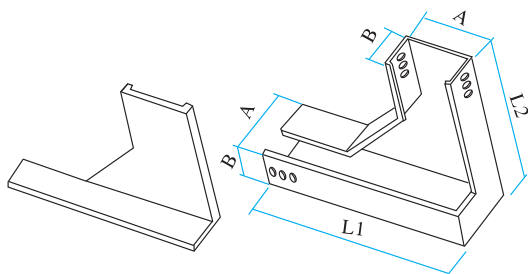


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	L1	L2			
50×25	350	325	2.55	0.81	当 H > 125 时,每端各 12 只连接 孔
100×50	400	350	4.92	1.41	
150×75	450	375	7.38	1.99	
200×100	500	400	12.72	2.62	
250×125	550	425	16.43	3.23	
300×150	600	450	20.56	3.89	
400×200	700	500	43.75	8.9	
500×200	800	500	53.94	12.5	
600×200	900	500	67.32	20.76	
800×200	1100	500	92.61	32.8	


垂直等径左上弯通 XQJ-C-2F

Vertical Equant Left Upper Elbow Jiont Cable Tray Model XQJ-C-2F

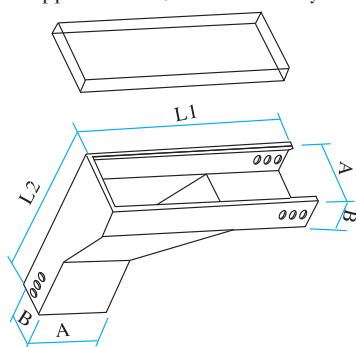

垂直等径右上弯通 XQJ-C-2G

Vertical Equant Right Upper Elbow Jiont Cable Tray Model XQJ-C-2G

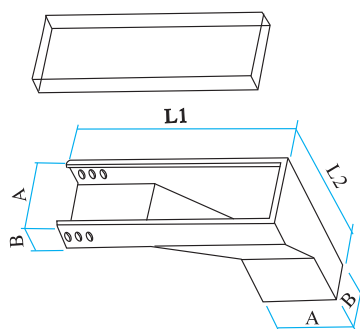

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	L1	L2			
50×25	350	325	3.12	0.45	当 H > 125 时,每端各 12 只连接 孔
100×50	400	350	5.63	0.98	
150×75	450	375	8.5	1.58	
200×100	500	400	14.08	2.2	
250×125	550	425	18.68	2.95	
300×150	600	450	22.2	3.72	
400×200	700	500	45.4	8.5	
500×200	800	500	56.1	11.7	
600×200	900	500	69.4	19.23	
800×200	1100	500	94.32	30.18	



扁形水平等径三通 XQJ-C-3A

Platiod Horizontal Equant T-jiont Cable Tray

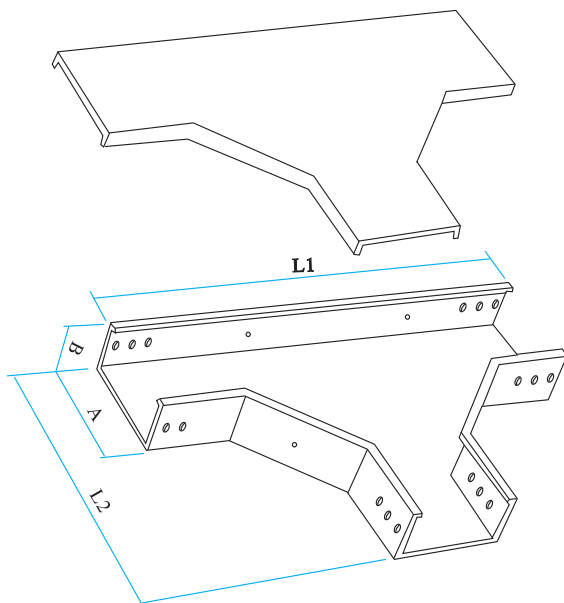


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	A×B	L1	L2			
C-3A-1	50×25	650	350	5.75	1.95	当 H > 125 时,每端各 12 只连接 孔
C-3A-2	100×50	700	400	8.49	2.91	
C-3A-3	150×75	750	450	11.55	3.96	
C-3A-4	200×100	800	500	18.50	5.1	
C-3A-5	250×125	850	550	22.65	6.37	
C-3A-6	300×150	900	600	30.67	11.2	
C-3A-7	400×200	1000	700	52.2	13.2	
C-3A-8	500×200	1100	800	63.10	17.94	
C-3A-9	600×200	1200	900	76.54	27.55	
C-3A-10	800×200	1400	1100	104.25	39.29	

上垂直等径三通 XQJ-C-3B

Upper Vertical Equant T-jiont Cable Tray

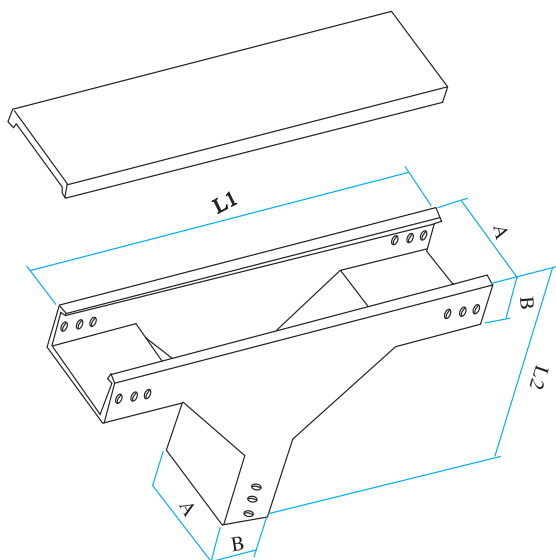


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	A×B	L1	L2			
C-3B-1	50×25	625	325	3.915	0.78	当 H > 125 时,每端各 12 只连接 孔
C-3B-2	100×50	650	350	7.21	1.53	
C-3B-3	150×75	675	375	10.15	2.27	
C-3B-4	200×100	700	400	16.14	2.97	
C-3B-5	250×125	725	425	19.67	3.72	
C-3B-6	300×150	750	450	23.42	4.5	
C-3B-7	400×200	800	500	30.12	7.02	
C-3B-8	500×200	800	500	39.15	10.88	
C-3B-9	600×200	800	500	44.03	12.9	
C-3B-10	800×200	800	500	53.84	17.00	

下垂直等径三通 XQJ-C-3C

Lower Vertical Equant T-joint Cable Tray

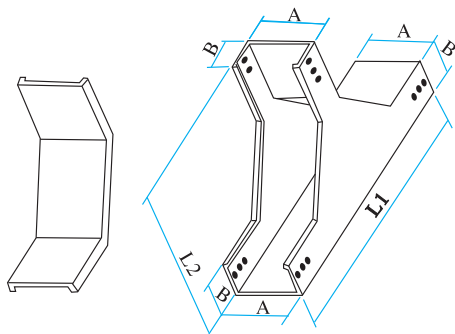


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	A×B	L1	L2			
C-3C-1	50×25	625	325	3.91	0.65	当 H > 125 时, 每端 各 12 只连 接孔
C-3C-2	100×50	650	350	7.11	1.23	
C-3C-3	150×75	675	375	10.08	1.76	
C-3C-4	200×100	700	400	16.28	2.2	
C-3C-5	250×125	725	425	19.93	2.67	
C-3C-6	300×150	750	450	23.77	3.14	
C-3C-7	400×200	800	500	37.51	4.54	
C-3C-8	500×200	800	500	41.12	5.59	
C-3C-9	600×200	800	500	47.54	8.33	
C-3C-10	800×200	800	500	57.57	10.93	

上边垂直等径三通 XQJ-C-3D

Catadrome Side Vertical Equant T-joint Cable Tray

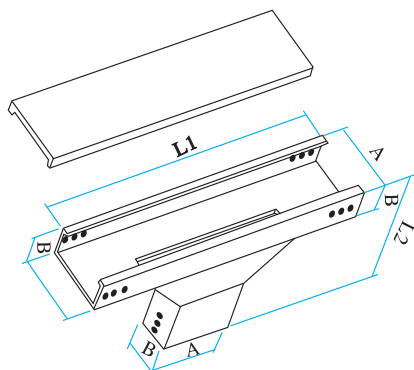


注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	A×B	L1	L2			
C-3D-1	50×25	650	325	3.75	0.81	当 H > 125 时, 每端 各 12 只连 接孔
C-3D-2	100×50	700	350	7.03	1.65	
C-3D-3	150×75	750	375	10.41	2.52	
C-3D-4	200×100	800	400	17.02	3.39	
C-3D-5	250×125	850	450	21.51	4.35	
C-3D-6	300×150	900	500	26.29	5.4	
C-3D-7	400×200	1000	500	45.40	8.8	
C-3D-8	500×200	1100	500	52.31	14.96	
C-3D-9	600×200	1200	500	63.3	19.4	
C-3D-10	800×200	1300	500	82.34	27.63	

下边垂直等径三通 XQJ-C-3E

Catadrome Side Vertical Equant T-joint Cable Tray

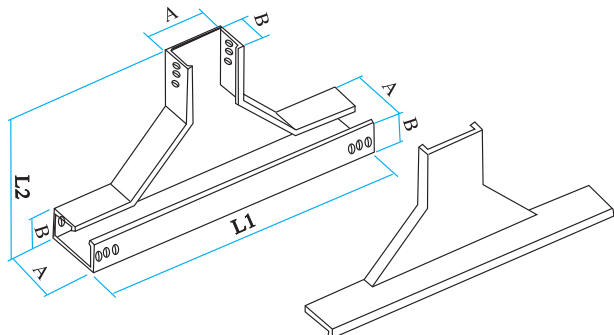

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

型号 Model	规格 A×B	Specification		重量 kg Weight	护罩 Weight	备注 Remark
	A×B	L1	L2			
C-3E-1	50×25	650	325	4.23	0.64	当 H > 125 时, 每端 各 12 只连 接孔
C-3E-2	100×50	700	350	8.16	1.48	
C-3E-3	150×75	750	375	11.21	2.08	
C-3E-4	200×100	800	400	18.3	2.71	
C-3E-5	250×125	850	450	22.4	3.64	
C-3E-6	300×150	900	500	27.43	5.33	
C-3E-7	400×200	1000	500	53.2	7.41	
C-3E-8	500×200	1100	500	59.8	10.92	
C-3E-9	600×200	1200	500	71.2	15.01	
C-3E-10	800×200	1300	500	93.3	24.05	




上角垂直等径三通 XQJ-C-3F

Upper Corner Vertical T-joint Cable Tray

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

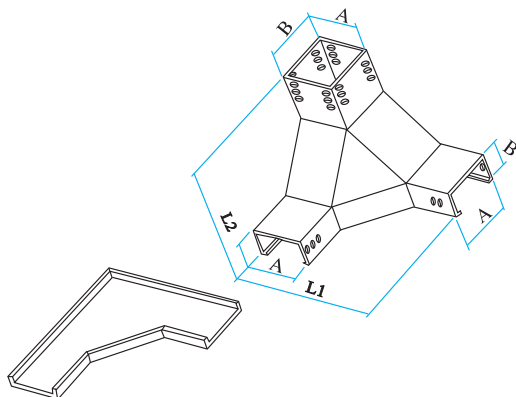

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.


型号 Model	规格 A×B Specification	重量 kg Weight	护罩 Weight	备注 Remark
C-3F-1	50×25	4.92	1.32	当 H > 125 时, 每端 各 12 只连 接孔
C-3F-2	100×50	7.83	1.9	
C-3F-3	150×75	11.29	2.73	
C-3F-4	200×100	15.58	3.66	
C-3F-5	250×125	23.56	4.62	
C-3F-6	300×150	30.53	7.56	
C-3F-7	400×200	52.3	10.92	
C-3F-8	500×200	68.5	14.78	
C-3F-9	600×200	81.2	19.11	
C-3F-10	800×200	103.5	30.81	

下角垂直等径三通 XQJ-C-3G

Upper Corner Vertical T-joint Cable Tray

注:需配护罩时请注明,配套扣锁价格另计。


Note:The price of locks is exclusive.

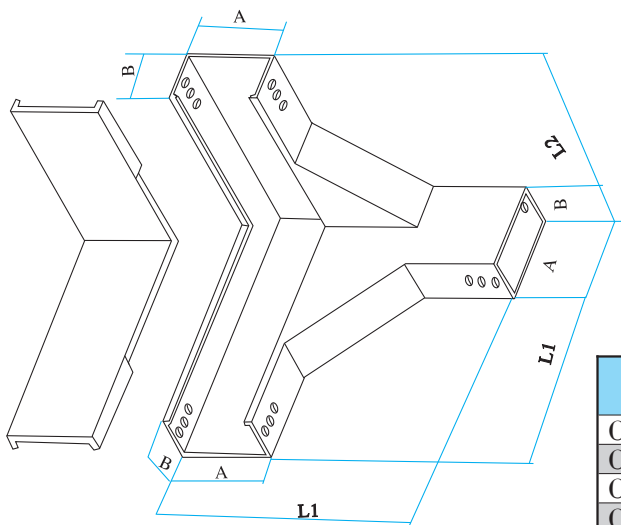

型号 Model	规格 A×B Specification	重量 kg Weight	护罩 Weight	备注 Remark
C-3G-1	50×25	4.41	0.79	当 H > 125 时, 每端 各 12 只连 接孔
C-3G-2	100×50	7.77	1.53	
C-3G-3	150×75	11.32	2.27	
C-3G-4	200×100	19.02	2.96	
C-3G-5	250×125	23.61	3.71	
C-3G-6	300×150	28.92	4.5	
C-3G-7	400×200	50.1	7.07	
C-3G-8	500×200	59.3	10.25	
C-3G-9	600×200	68.5	16.1	
C-3G-10	800×200	92.3	25.5	

水平等径四通 XQJ-C-4A

Horizontal Equant Cross Cable Tray

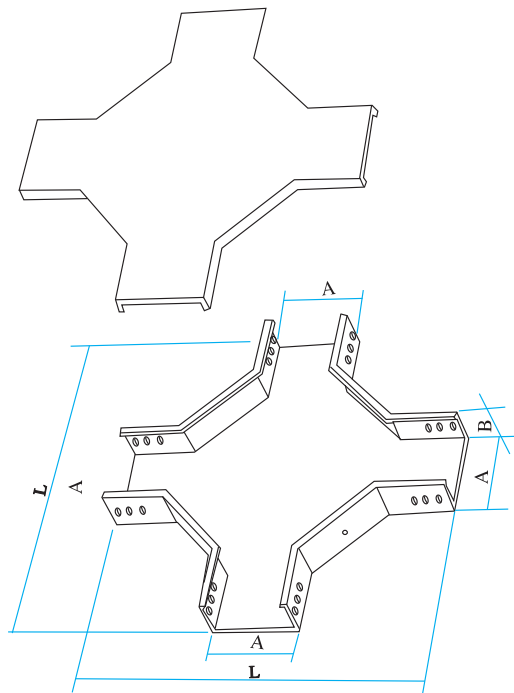


型号 Model	规格 A×B Specification	重量 kg Weight	护罩 Weight	备注 Remark
C-4A-1	50×25	650	7.85	2.79
C-4A-2	100×50	700	10.63	4.08
C-4A-3	150×75	750	14.97	5.39
C-4A-4	200×100	800	25.19	6.74
C-4A-5	250×125	850	27.91	8.33
C-4A-6	300×150	900	36.2	12.99
C-4A-7	400×200	1000	62.3	17.8
C-4A-8	500×200	1100	72.1	23.13
C-4A-9	600×200	1200	85.5	29.87
C-4A-10	800×200	1400	112.25	43.21

当 H > 125
时，每端
各 12 只连
接孔


上角垂直等径四通 XQJ-C-4B

Upper Vertical Equant Cross Cable Tray

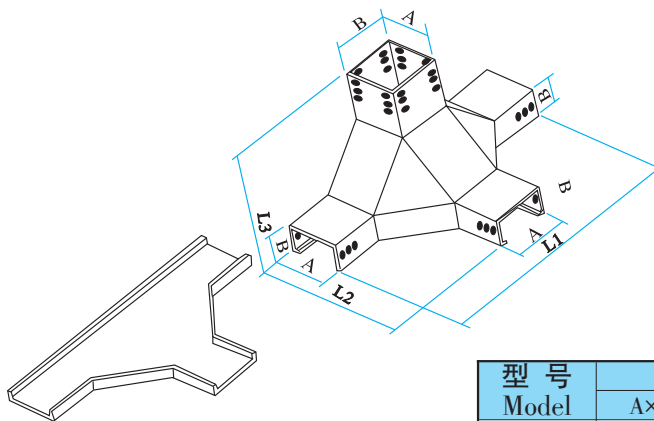


型号 Model	规格 A×B Specification	重量 kg Weight	护罩 Weight	备注 Remark
C-4B-1	50×25	650	5.22	1.95
C-4B-2	100×50	700	8.82	2.91
C-4B-3	150×75	750	12.62	3.96
C-4B-4	200×100	800	20.34	5.12
C-4B-5	250×125	850	25.41	6.38
C-4B-6	300×150	900	34.16	11.2
C-4B-7	400×200	1000	63.21	13.2
C-4B-8	500×200	1100	82.31	17.94
C-4B-9	600×200	1200	91.56	27.55
C-4B-10	800×200	1400	118.5	39.29


当 H > 125
时，每端
各 12 只连
接孔




上平异径接头(一)XQJ-C-5A
Upper Flat Reducing Joint Cable Tray



上平异径接头(二)XQJ-C-5B
Upper Flat Reducing Joint Cable Tray



下平异径接头(一)XQJ-C-5C
Lower Flat Reducing Joint Cable Tray



下平异径接头(二)XQJ-C-5D
Lower Flat Reducing Joint Cable Tray

注:以上各种规格的外形尺寸及重量相同。

型号 Model	规格 Specification A1×B1-A2×B2	L	重量 kg Weight	护罩 Weight	备注 Remark
C-5B-1	50×25-100×50	350	1.28	0.9	
C-5B-2	50×25-150×75	400	2.01	1.41	
C-5B-3	50×25-200×100	450	3.59	2.51	
C-5B-4	50×25-250×125	500	4.49	3.14	
C-5B-5	50×25-300×150	550	8.64	6.05	
C-5B-6	50×25-400×200	700	16.24	11.37	
C-5B-7	50×25-500×200	800	20.90	14.63	
C-5B-8	50×25-600×200	900	26.41	18.49	
C-5B-9	50×25-800×200	1100	40.35	28.25	
C-5B-10	100×50-150×75	350	2.23	1.56	
C-5B-11	100×50-200×100	400	3.85	2.78	
C-5B-12	100×50-250×125	450	4.77	3.34	
C-5B-13	100×50-300×150	500	8.86	6.20	
C-5B-14	100×50-400×200	650	16.59	11.61	
C-5B-15	100×50-500×200	750	21.33	14.93	
C-5B-16	100×50-600×200	850	26.64	18.65	
C-5B-17	100×50-800×200	1050	38.85	27.20	
C-5B-18	150×75-200×100	350	3.61	2.53	
C-5B-19	150×75-250×125	400	4.92	3.44	
C-5B-20	150×75-300×100	450	8.64	6.05	
C-5B-21	150×75-400×200	600	16.31	11.42	当 H > 125 时, 每端各 12 只连接孔
C-5B-22	150×75-500×200	700	21.19	14.83	
C-5B-23	150×75-600×200	800	26.53	18.57	
C-5B-24	150×75-800×200	1000	39.11	27.38	
C-5B-25	200×100-250×125	350	4.42	3.10	
C-5B-26	200×100-300×150	400	8.16	5.71	
C-5B-27	200×100-400×200	450	15.70	11.00	
C-5B-28	200×100-500×200	650	20.60	14.42	
C-5B-29	200×100-600×200	750	26.07	18.25	
C-5B-30	200×100-800×200	950	38.67	27.00	
C-5B-31	250×125-300×125	350	7.54	5.28	
C-5B-32	250×125-400×200	500	14.94	10.46	
C-5B-33	250×125-500×200	600	19.95	13.97	
C-5B-34	250×125-600×200	700	25.78	18.05	
C-5B-35	250×125-800×200	900	38.43	26.90	
C-5B-36	300×150-400×200	450	16.72	11.70	
C-5B-37	300×150-500×200	550	21.86	15.30	
C-5B-38	300×150-600×200	650	27.50	19.25	
C-5B-39	300×150-800×200	850	39.04	27.33	
C-5B-40	400×200-500×200	500	42.93	30.05	
C-5B-41	400×200-600×200	600	55.64	38.95	
C-5B-42	400×200-800×200	800	71.74	50.22	
C-5B-43	500×200-600×200	500	48.74	34.12	
C-5B-44	500×200-800×200	700	77.58	46.55	
C-5B-45	600×200-800×200	600	69.30	41.58	

注:需配护罩时请注明,配套扣锁价格另计。

Note:The price of locks is exclusive.

组合式电缆桥架

XQJ-ZH

组合式电缆桥架是一种最新型桥架，是电缆桥架系列中的第二代产品。它适用各项工程、各个单位、各种电缆的敷设，它具有结构简单、配置灵活、安装方便、型式新颖等优点。

组合式电缆桥架只要采用宽100、150、200mm的三种基础型就可以组成您所需要的尺寸的电
缆桥架，它不需生产弯通、三通等配件就可以根据现场安装需要任意转向、变宽、分支、引上、
引下。在任意部位，不需要打孔、焊接就可管引出。它既可以方便工程设计，又方便生产运输，
更方便安装施工，是目前电缆桥架中最理想的产品。

Combination Cable


XQJ-ZH

Combination cable belongs to the newest type, the second-generation product in the series of cables. It's suitable for every project, every unit, and also the laying of various kinds of cables. It has such advantages as simple structure, flexible disposition, convenient installation and new modelling.

Combination cable can be composed to the cable you need to your own measure only by adopting the three basic types like the width 100,150,200mm. It can have the function of turning, width change, division, up or down readily according to the site installation without the necessity of producing such fitting as elbow and three-way. It can be drawn forth using pipes without drilling or welding in any part. It is not only convenient for the project desing, but for the production transportation, even more convenient for the constallation. It is the most ideal product in the family of cables at the present time.




XQJ-ZH-01A型组合式电缆桥架
Combination Cable Bridges

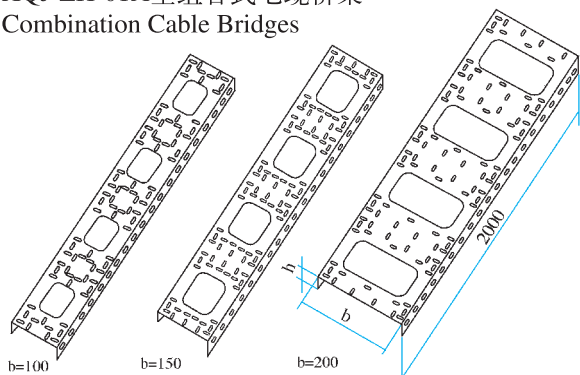


序号 No.	型号 Model	规格b×h Specification	重量kg Weight	备注 Remark
1	ZH-01A-100	100×25	6.28	
2	ZH-01A-150	150×25	8.61	
3	ZH-01A-200	200×25	10.84	

XQJ-ZH-01B型组合式电缆桥架
Combination Cable Bridges

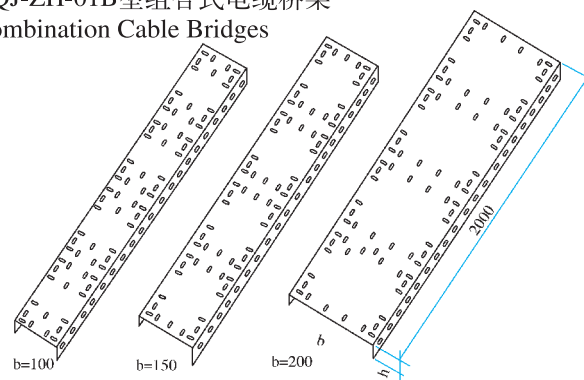


序号 No.	型号 Model	规格b×h Specification	重量kg Weight	备注 Remark
1	ZH-01B-100	100×25	6.28	
2	ZH-01B-150	150×25	8.61	
3	ZH-01B-200	200×25	10.84	

XQJ-ZH-02配线桥架
Allocate Cable Bridges

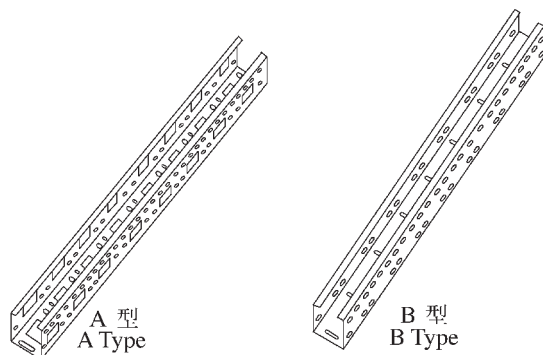


序号 No.	型号 Model	规格 Specification	支撑距离“×”时的电缆负载能力 Spans & Their Loads						重量kg Wt(kg)	备注 Remark
			1.5mm	2mm	2.5mm	3mm	3.5mm	4mm		
1	ZH-02A	50×50	50	30	16	9	5	3	5.85	
2	ZH-02B	50×50	50	33	18	10	6	4	5.85	

XQJ-ZH-03配线桥架
Allocate Cable Bridges

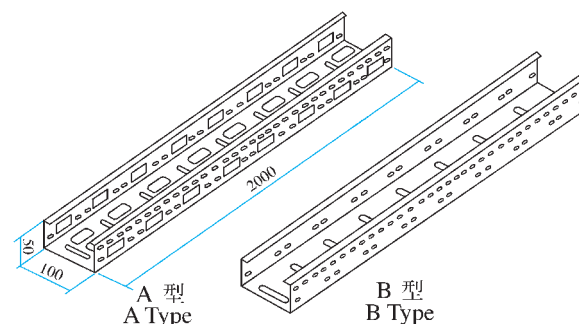


序号 No.	型号 Model	规格 Specification	支撑距离“×”时的电缆负载能力 Spans & Their Loads						重量kg Wt(kg)	备注 Remark
			1.5mm	2mm	2.5mm	3mm	3.5mm	4mm		
1	ZH-03A	100×50	67	38	20	12	7	5	9.64	
2	ZH-03B	100×50	88	50	28	16	10	7	9.64	

XQJ-ZH-04配线桥架
Allocate Cable Bridges

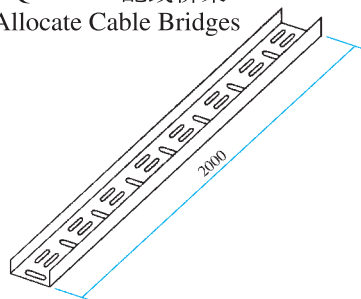


序号 No.	型号 Model	规格 Specification	重量kg Wt(kg)	备注 Remark
1	ZH-04	50×25	4.53	

XQJ-ZH-06连接板
Connecting Plotes



序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-06	25×25	5.60	


XQJ-ZH-07连接板
Connecting




序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-07	24×70	4.10	

XQJ-ZH-08连接板
Connecting flake



序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-08	46 × 100	7.20	

XQJ-ZH-09管接头
Pipe Jiont


序号 No.	配管G Pipe	安装尺寸 Installation size		单价元/件 Unit Price (\$)	备注 Remark
		L	H		
1	G $\frac{1}{2}$ "	122	74	8.60	配ZH-01-100组合桥架 used with combination type cable tray Model ZH-01-100
2	G $\frac{3}{4}$ "			8.60	
3	G1"			16.20	
4	G1 $\frac{1}{2}$ "			30.80	
5	G2"	122	124	40.90	配ZH-01-150组合桥架 used with combination type cable tray Model ZH-01-150
6	G $\frac{1}{2}$ "			9.80	
7	G $\frac{3}{4}$ "			11.60	
8	G1"			17.40	
9	G1 $\frac{1}{2}$ "	122	174	32.00	配ZH-01-200组合桥架 used with combination type cable tray Model ZH-01-200
10	G2"			42.10	
11	G $\frac{1}{2}$ "			11.00	
12	G $\frac{3}{4}$ "			11.80	
13	G1"			18.60	
14	G1 $\frac{1}{2}$ "			33.20	
15	G2"			43.30	


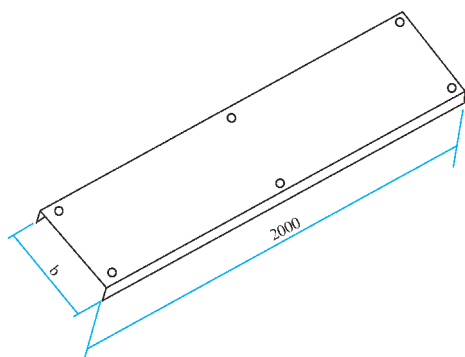
XQJ-ZH-05盖板
Covers


序号 No.	型号 Model	规格b×h Specification	重量kg/1节 Weight	备注 Remark
1	ZH-05-50	55 × 20	3.81	
2	ZH-05-100	105 × 20	5.24	
3	ZH-05-150	155 × 20	7.15	
4	ZH-05-200	205 × 20	8.61	
5	ZH-05-300	305 × 20	14.23	
6	ZH-05-400	405 × 20	23.68	
7	ZH-05-500	505 × 20	28.77	
8	ZH-05-600	606 × 20	38.21	
9	ZH-05-700	706 × 20	44.37	
10	ZH-05-800	806 × 20	50.51	


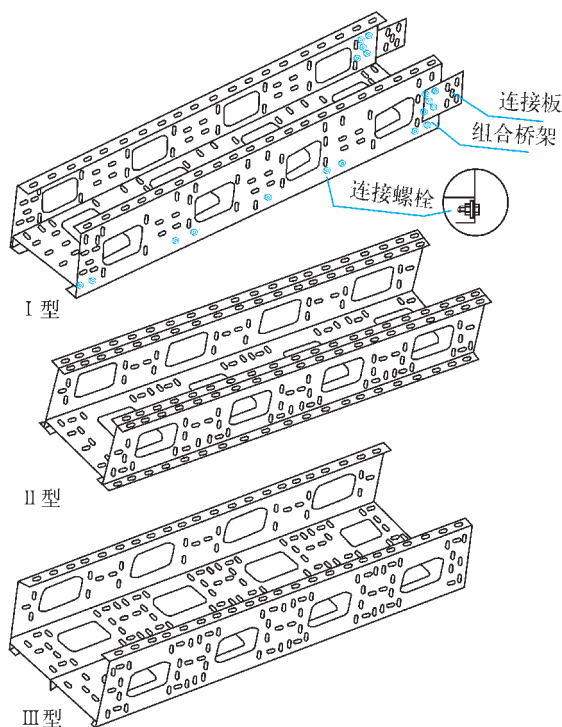
组合式直通桥架组装示意图
Installation Sketch Map of Combination-Type
Straight-Way Bridgeframe




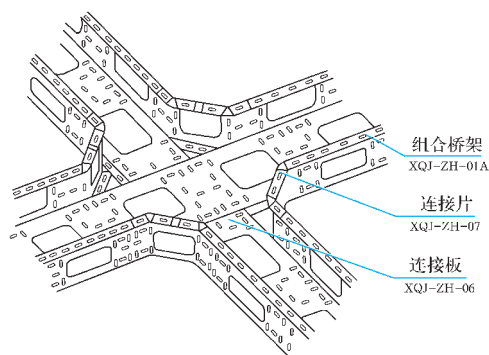
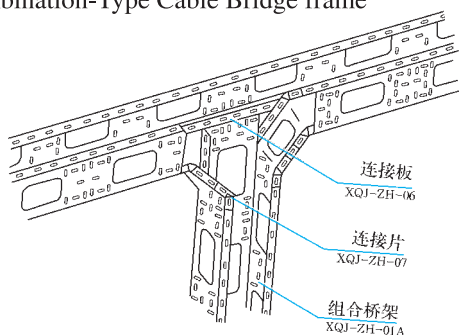
组合式电缆桥架隔板组装示意图
Installation Sketch map of Separating Board
of Combination-Type Cable Bridge frame

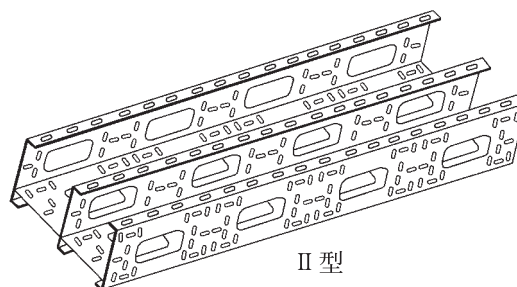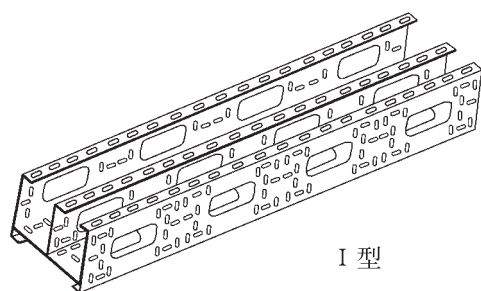



组合式电缆桥架水平弯通三通组装示意图
Installation Sketch map of Horizontal Curved-Way.3-
Way of Combination-Type Cable Bridge frame

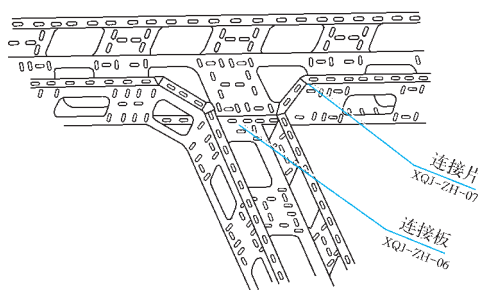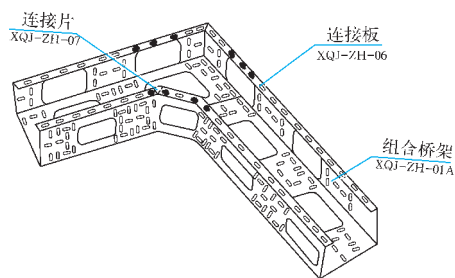

组合式电缆桥架水平四通、垂直三通组装示意图
Installation Sketch map of Horizontal 4-Way. Vertical 3-Way of
Combination-Type Cable Bridge frame




组合式电缆桥架垂直弯通及几种锯切示意图
Sketch map of Vertical Curved-Way and several Sewint
of Combination-Type Cable Bridge frame

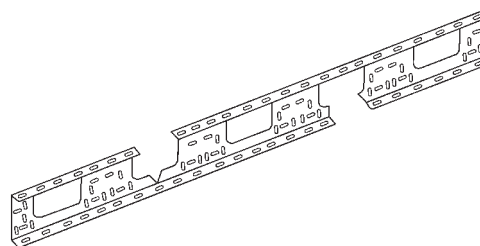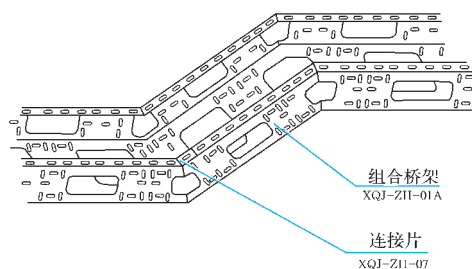

XQJ-ZH型组合式电缆桥架不同跨距的载荷
Load of XQJ-ZH Combination-Type Cable Bridge frame at different span

序号 No.	形式	尺寸 Size		h=100 在不同跨距下允许均布载荷					h=150 在不同跨距下允许均布载荷					h=200 在不同跨距下允许均布载荷				
		a	b	2.0 m	2.5 m	3 m	4 m	6 m	2.0 m	2.5 m	3 m	4 m	6 m	2.0 m	2.5 m	3 m	4 m	6 m
1001	A	103	100															
1002		153	150	167	105	71	38	—	239	151	103	56	—	483	306	208	116	48
1003		203	200															
1004		303	300															
1005		403	400															
1006		503	500															
1007	B	603	600	161	99	65	—	—	235	147	99	52	—	479	302	204	112	
2008		205	200															
2009		305	300	204														—
2010		405	400															
2011		505	500															
2012		605	600	202	147	98	51	—	309	224	153	82	30	507	457	314	171	69
2013	C	805	800															
3014			300															
3015			450	255	103	131	69	—	398	302	206	110	42		612	420	230	94
3016			600															
3017		806	800	249	187	125	63	—	396	300	204	108	40		608	416	226	90
3018		1006	1000	249	185	123	61	—	394	298	202	106	38		604	412	222	86
3019	D	1206	1200	245	183	121	59	—	392	296	200	104	36		600	408	208	82
4020		153	100															
4021		203	150	281	213	145	77	31		306	210	114	46		613	424	235	97
4022		253	200															
4023		353	300															
4024		453	400	279	212	143	75	29		302	206	110	42		609	420	231	93
5025	E	256	200															
5026		356	300		316	216	116	45			312	169	67			636	351	147
5027		456	400															
5028		656	600															
5029		856	800		312	212	112	41			308	165	63			632	347	142
5029																		

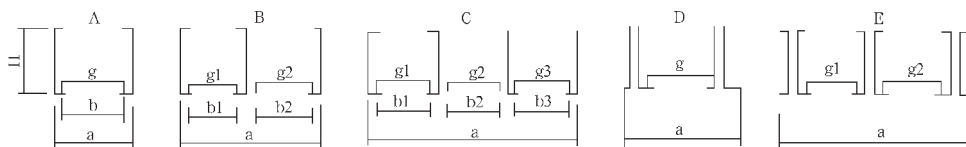




XQJ-ZH组合电缆桥架组合形式及配套件数表

The list combination forms of XQJ-ZH Combination-Type Cable Bridgeframe and the numbers of into fittings

底板与侧边的配制图
Combination figure of
bottom board and side

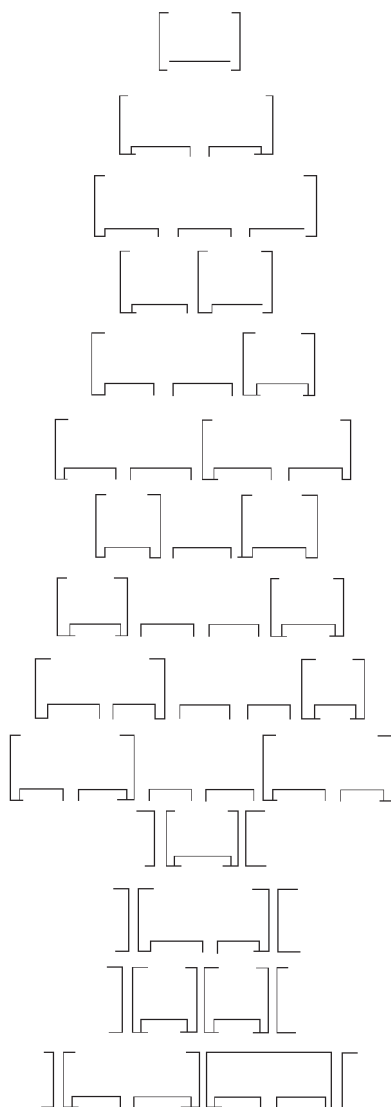

底板宽	形 式 Model	底板数量 NO. of bottom board			侧边 数量	连接螺栓		重位 kg/m
		100	150	200		规格	数量/m	
103	A	1			2	M ₆ × 12	★ 6 (14)	
153	A		1		2			
203	A			1	2			
303	A		2		2		9 (19)	
403	A			2	2			
503	A		2	1	2	M ₆ × 12	12 (24)	
603	A			3	2			
205	B	2			3		9 (21)	
305	B		2		3			
405	B			2	3			
505	B		2	1	3	M ₆ × 12	12 (26)	
605	B			3	3			
805	B			4	3		15 (31)	
306	C	3			4	M ₆ × 12	12 (28)	
456	C		3		4			
606	C			3	4			
806	C			4	4		15 (33)	
1006	C			5	4	M ₆ × 12	18 (38)	
1206	C			6	4		21 (43)	
153	D	1			4	M ₆ × 15	16 (24)	
203	D		1		4			
253	D			1	4			
353	D		2		4		20 (30)	
453	D			2	4	M ₆ × 15		
256	E	2			6		24 (36)	
356	E		2		6			
456	E			2	6			
656	E		4		6		32 (48)	
856	E			4	6			

★注括号内的数量包括成型和连接片所连接需螺栓数

附 件

本部分主要是XQJ系列电缆桥架的通用配件，它包括调宽片、调高片、隔板等。这是电缆桥架安装中的变宽、变高、连接、水平和垂直走向中的小角度调整动力电缆与控制电缆的分隔等必需的附件。

Accessories

This part mainly contains common fittings of XQJ series of cables, including width-adjusting plate, height-adjusting plate and separation board, this is the small-angle adjusting plate, connection plate, angle-adjustment in the changing of width and height, connection, horizontal and vertical tread in the installation of cables, and also the necessary accessories for the separation between power cable and control cables.




XQJ-TPC-01A调宽片
Width-Adjusting Flake




序号 No.	型号 Model	配套高度 H Height	h ₁	L	单价/件 Unit price (\$)	备注 Remark
1	TPC-01A-6-1	60	50	100	9.80	高度h为 60、100时每端 3只连接孔 3 holes in either end of width modulator with a height of 60mm and 100mm
2	TPC-01A-6-2			200	10.50	
3	TPC-01A-6-3			300	11.80	
4	TPC-01A-6-4			400	12.70	
5	TPC-01A-10-1	100	90	100	13.70	高度h为 150的, 每端12只 连接孔 12 holes in either end of width modulator with a height of 150mm
6	TPC-01A-10-2			200	18.20	
7	TPC-01A-10-3			300	21.20	
8	TPC-01A-10-4			400	23.40	
9	TPC-01A-15-1	150	140	100	27.10	
10	TPC-01A-15-2			200	30.50	
11	TPC-01A-15-3			300	33.90	
12	TPC-01A-15-4			400	37.30	

安装图例




XQJ-TPC-01B调高片
Height-Adjusting Flake




序号 No.	型号 Model	L ₁	L ₂	L	单价/件 Unit price (\$)	备注 Remark
1	TPC-01B-60/100	50	90	205	10.60	高度 60调100 From 60mm to 100mm
2	TPC-01B-60/150	50	140	205	15.10	高度 60调150 From 60mm to 150mm
3	TPC-01B-100/150	90	140	205	17.10	高度 100调150 From 100mm to 150mm
4	TPC-01B-150/200	140	190	385	25.30	高度 150调200 From 150mm to 200mm

安装图例




XQJ-TPC-02直接片
Straight Connecting Flake




序 号 No.	型 号 Model	配套高度 H Height	h ₁	h ₂	L	单价/件 Unit price (\$)	备 注 Remark
1	TPC-02a-50	50、60	35	32	205	9.80	桥架高度125mm以下的直接片为6只连接孔。 6 holes in connectors when cable tray is below 125mm high.
2	TPC-02b-50					9.50	
3	TPC-02a-75	75	50	47		10.60	
4	TPC-02b-75					10.20	
5	TPC-02a-100	100	75	71	205	13.80	桥架高度150mm以下的直接片为12只连接孔。 12 holes in connectors when cable tray is over 150mm high.
6	TPC-02b-100					13.50	
7	TPC-02a-125	125	100	96		16.50	
8	TPC-02b-125					16.00	
9	TPC-02a-150	150	125	120	205	19.50	桥架高度100mm以下的直接片为6只连接孔。 6 holes in connectors when cable tray is below 100mm high.
10	TPC-02b-150					18.50	
11	TPC-02a-200	200	175	170		28.50	
12	TPC-02b-200					27.00	
13	TPC-02c-60	60	30	205	10.60	桥架高度100mm以下的直接片为6只连接孔。 6 holes in connectors when cable tray is below 100mm high.	
14	TPC-02d-60						10.20
15	TPC-02c-100	100			35		13.80
16	TPC-02d-100						13.50
17	TPC-02c-150	150	80		19.50		桥架高度150mm以下的直接片为12只连接孔。 12 holes in connectors when cable tray is over 150mm high.
18	TPC-02d-150				18.50		
19	TPC-02c-200	200	130		28.50		
20	TPC-02d-200				27.00		

安装图例




XQJ-TPC-03弯接片
Curved Connecting Flake




序号 No.	型号 Model	配套高度 H Height	h ₁	L	单价/件 Unit price (\$)	备注 Remark
1	TPC-03-50	50、60	35	300	10.10	
2	TPC-03-75	75	50		12.20	
3	TPC-03-100	100	75		17.90	
4	TPC-03-125	125	100		20.90	
5	TPC-03-150	150	125	600	31.60	
6	TPC-03-200	200	175		36.10	

安装图例




XQJ-TPC-04调角片
Angle-Adjusting Flake





序号 No.	型号 Model	配套高度 H Height	h ₁	L	单价/件 Unit price (\$)	备注 Remark
1	TPC-04-60	60	50	260	9.00	与梯级式、托盘式、槽式小 开档连接孔配套 used with ladder type, tray type and channel type cable tray 与大跨距桥架, 槽式大开档桥 架配套 used with long span and channel type cable tray
2	TPC-04-100	100	90	300	15.60	
3	TPC-04-150	150	140	350	20.90	

安装图例





XQJ-TPC-05 固定压板

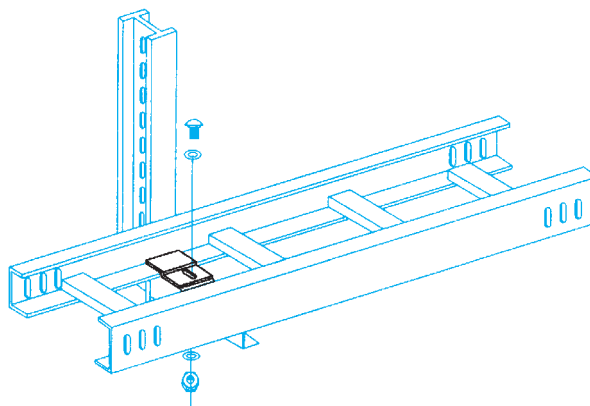

TPC-05固定压板，主要用于梯级式桥架与托臂压固及梯级式桥架垂直安装时与墙壁固定TPC-05
fixing pressed board is mainly used in the fixing of Stair-type
bridge frame with braced arm and the fixing of stair-type bridge frame with wall when installed vertically



XQJ-TPC-07 隔板

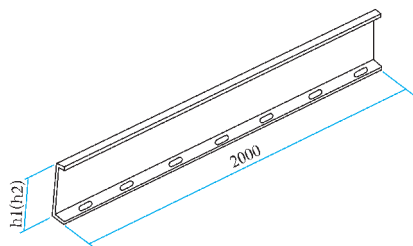

h_1 用于梯级式桥架
 h_2 用于托盘式和槽式桥架

型 号 Model	配 套 高 度	h_1 mm	h_2 mm	重量 kg	
				h_1	h_2
TPC-07-50	50、60	35	40	2.78	3.60
TPC-07-75	75		65		4.87
TPC-07-100	100	75	90	4.49	6.17
TPC-07-125	125		115		7.16
TPC-07-150	150	125	140	8.29	10.92
TPC-07-200	200		190		14.69

XQJ-TPC-13 管接头



序 号 No.	型 号 Model	配管尺寸 G size of pipe	M	d	s	单价元 / 件 unit price(s)
1	TPC-13- $\frac{1}{2}$ "	$\frac{1}{2}$ "	M22 $\times$ 1.5	18	27	6.20
2	TPC-13- $\frac{3}{4}$ "	$\frac{3}{4}$ "	M27 $\times$ 1.5	22	32	6.60
3	TPC-13-1"	1"	M33 $\times$ 1.5	28	41	12.30
4	TPC-13-1 $\frac{1}{2}$ "	1 $\frac{1}{2}$ "	M48 $\times$ 2	38	55	24.50
5	TPC-13-2"	2"	M56 $\times$ 2	48	65	32.90



铝合金电缆桥架 LQJ系列

LQJ系列铝合金桥架是清华大学与我厂联合开发研制成功的新型产品。随着现代化工业的飞速发展，动力电缆、控制电缆和通信电缆的需求量猛增，因此，电缆桥架得到了广泛应用。它的作用能使厂用、船用乃至海上采油平台的电缆敷设实现了标准化、系列化和通用化的要求，为工程设计、施工安装、安全生产提供了方便。

我们等效采用美国材料标准生产的铝合金桥架具有高抗蚀性能，由于对桥架铝型材截面设计的合理，整体结构紧凑，安装灵活多变致使本产品具有载荷大、重量轻、施工方便、外形美观等突出优点，在国内处于领先地位。

Aluminum Cable LQJ series

LQJ series of aluminum cable are new varieties of products researched and produced by our factory and Qinhua university. with the rapid development of modern industry, the requirement of power cable, control cable and communication cable increases so quickly, therefore cables are widely used. They can be used for the factory and the ship, so that the cable laying of the oil extraction terrace in the sea reaches standardization, and general purpose. They give the convinience to the project design, construction installlation and safe production.


The aluminim cable produced by our factory is adopted with the same effect by the standarization of American material, having the function of high touch-resistence. Because of the reasonable design of the cross section of aluminum material, the integral structire is so compact, flexible and changeable in installation that it has such advantages as heavy load, ligh weight, convenient installation and beautiful modelling, holding a safe lead at home and adroad.

最新荣誉推出高防腐铝合金电缆桥架系列

NEWLY-PRODUCED SERIES OF HIGH ROTPROOF
ALUNIMIUM ALLOY ELECTRIC CABLES BRIDGE FROMES

铝合金桥架


Al-alloy Supports

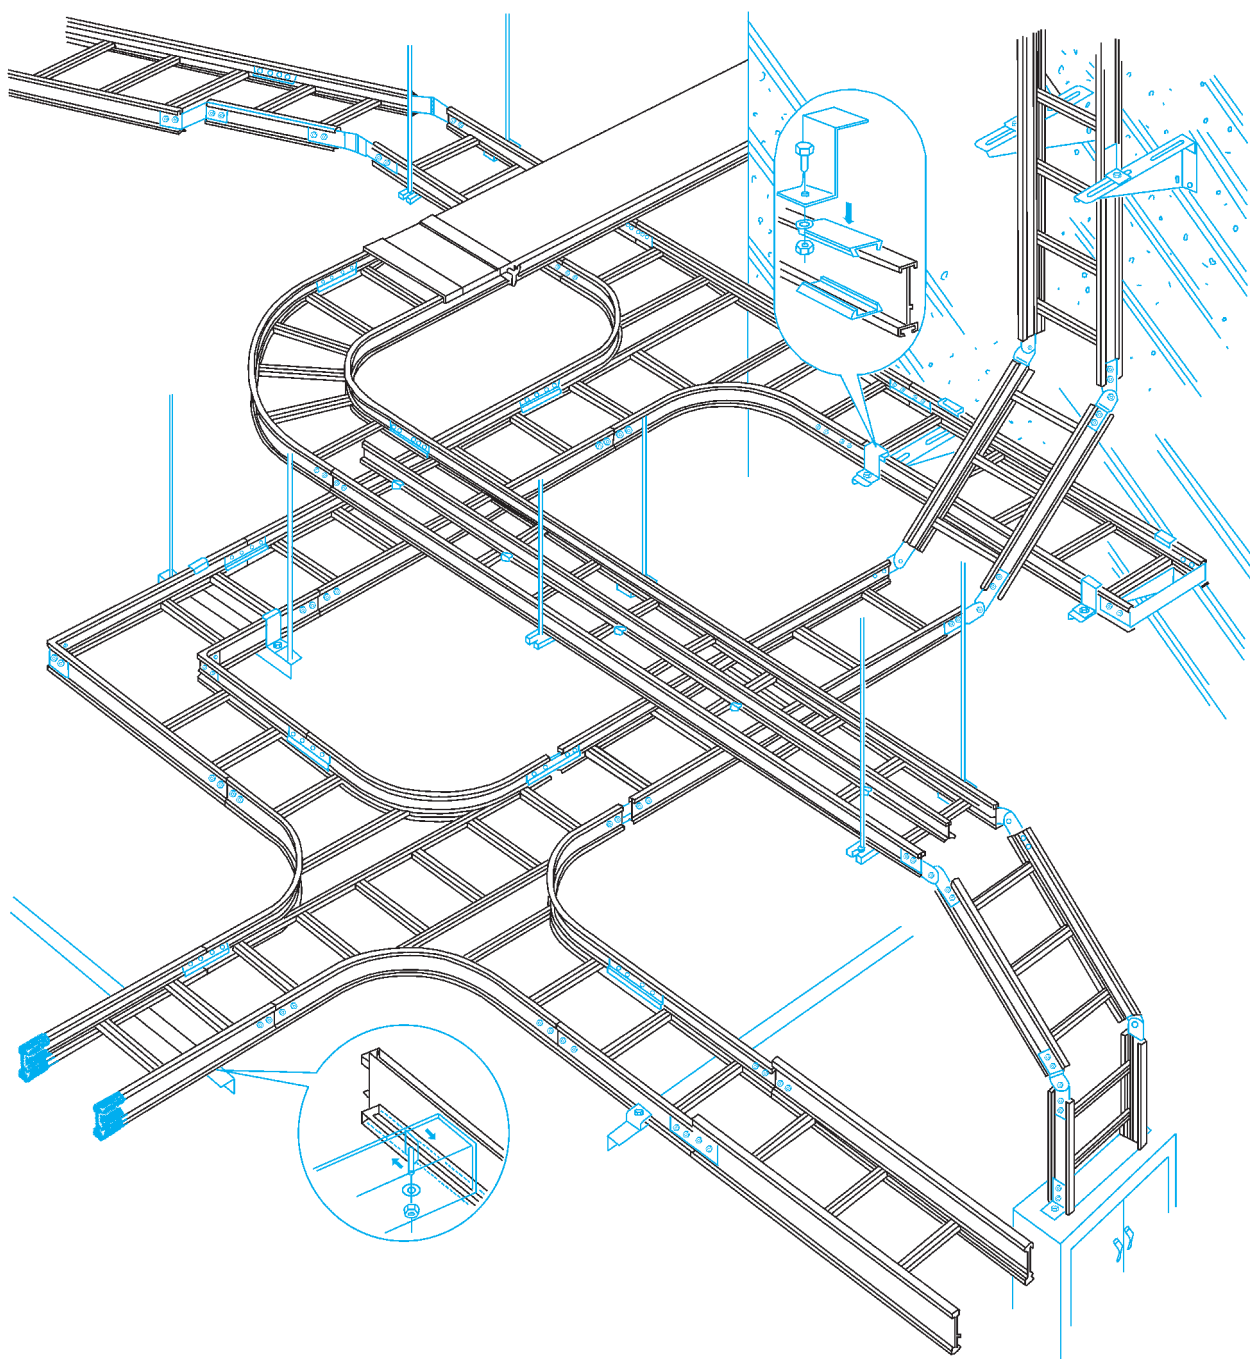




LQJ-WC型配线桥架


LQJ-WC Wiring Cable Tray Model

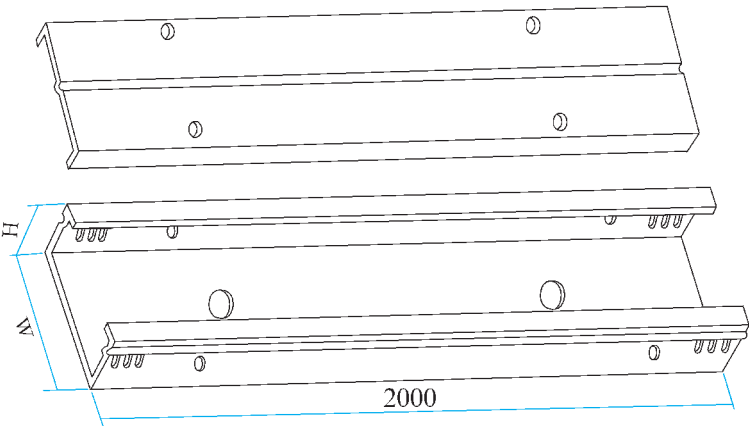

型 号 Model	H	W	重 量 Weight
LQJ-WC-2.5-5	25	50	2.73
LQJ-WC-2.5-10		100	4.61
LQJ-WC-2.5-15		150	5.07
LQJ-WC-2.5-20		200	7.67
LQJ-WC5-5	50	50	3.20
LQJ-WC5-10		100	5.12
LQJ-WC5-15		150	6.96
LQJ-WC5-20		200	8.19
LQJ-WC10-5	100	100	6.18
LQJ-WC10-10		150	8.02
LQJ-WC10-15		200	9.24
LQJ-WC10-20		250	11.08

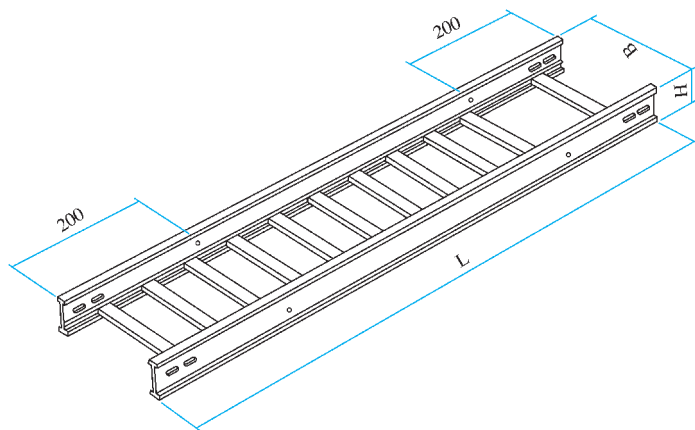XQJ-LQJ-T型梯级式桥架
LQJ-T Ladder Frame


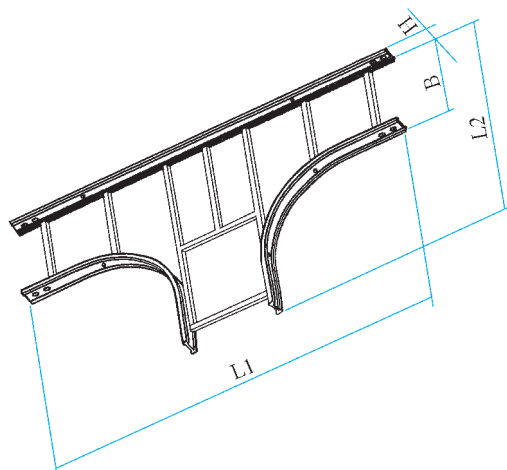
型 号 Model	宽 度 B	高 度 H	重 量 (kg)	护 罩 Cover
LQJ-T-6-10	100	60	6.33	2.71
LQJ-T-6-20	200		7.12	4.72
LQJ-T-6-30	300		7.79	6.68
LQJ-T-6-40	400		8.88	8.66
LQJ-T-11-20	200	110	9.44	4.72
LQJ-T-11-30	300		10.06	6.68
LQJ-T-11-40	400		11.54	8.66
LQJ-T-11-50	500		12.21	12.75
LQJ-T-11-60	600		12.86	15.11
LQJ-T-11-80	800		14.20	23.13
LQJ-T-11-100	1000		15.54	28.63
LQJ-T-14-40	400	140	13.13	8.66
LQJ-T-14-50	600		14.45	15.11
LQJ-T-14-60	800		15.80	23.13
LQJ-T-14-80	1000		17.14	28.63
LQJ-T-14-100	400	180	15.91	8.66
LQJ-T-18-60	600		17.59	15.11
LQJ-T-18-80	800		19.16	23.13
LQJ-T-18-100	1000		20.88	28.63
LQJ-T-20-40	400	200	16.24	8.66
LQJ-T-20-60	600		19.58	15.11
LQJ-T-20-80	800		21.59	23.13
LQJ-T-20-100	1000		23.58	28.63

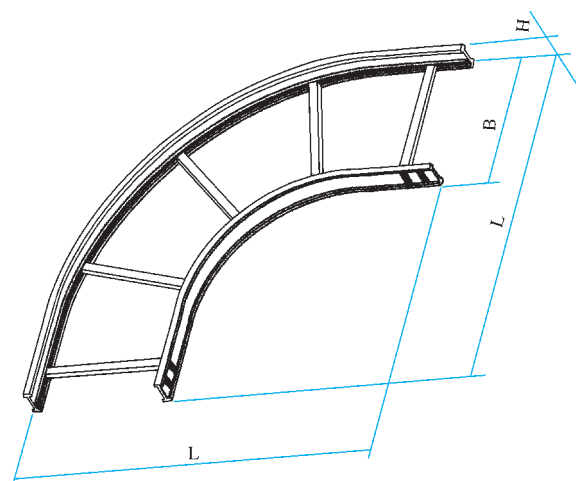XQJ-LQJ-RT型水平弯通
LQJ-RT Horizontal Elbow


型 号 Model	宽 度 B	高 度 H	L R=300	重 量 (kg)	护 罩 Cover
LQJ-RT-6-10	100	60	600	3.51	0.84
LQJ-RT-6-20	200		700	3.68	1.62
LQJ-RT-6-30	300		800	4.52	2.51
LQJ-RT-6-40	400		900	5.35	4.70
LQJ-RT-11-20	200	110	700	4.82	1.62
LQJ-RT-11-30	300		800	5.88	2.51
LQJ-RT-11-40	400		900	6.86	4.70
LQJ-RT-11-50	500		1000	8.26	6.24
LQJ-RT-11-60	600		1100	10.08	8.72
LQJ-RT-11-80	800		1200	12.74	13.40
LQJ-RT-11-100	1000		1300	15.68	16.02
LQJ-RT-14-40	400	140	900	9.24	4.70
LQJ-RT-14-50	600		1100	10.64	8.72
LQJ-RT-14-60	800		1300	15.26	13.40
LQJ-RT-14-80	1000		1500	18.06	16.02
LQJ-RT-14-100	400	180	900	11.62	4.70
LQJ-RT-18-60	600		1100	13.02	8.72
LQJ-RT-18-80	800		1300	17.64	13.40
LQJ-RT-18-100	1000		1500	20.44	16.02
LQJ-RT-20-40	400	200	900	14.00	4.70
LQJ-RT-20-60	600		1100	15.40	8.72
LQJ-RT-20-80	800		1300	20.02	13.40
LQJ-RT-20-100	1000		1500	22.82	16.02




XQJ-LQJ-ST型水平三通
LQJ-ST Horizontal Elbow




型号 Model	宽度 B	高度 H	L1 R=300	L2 R=300	重量 (kg)	护罩 Cover
LQJ-ST-6-10	100	60	1100	600	4.98	1.52
LQJ-ST-6-20	200		1200	700	5.85	2.93
LQJ-ST-6-30	300		1300	800	6.84	4.52
LQJ-ST-6-40	400		1400	900	7.28	8.46
LQJ-ST-11-20	200	110	1200	700	7.83	2.93
LQJ-ST-11-30	300		1300	800	8.74	4.52
LQJ-ST-11-40	400		1400	900	9.98	8.46
LQJ-ST-11-50	500		1500	1000	10.64	11.22
LQJ-ST-11-60	600	140	1600	1100	11.87	12.54
LQJ-ST-11-80	800		1800	1200	15.45	24.11
LQJ-ST-11-100	1000		2000	1300	19.02	28.83
LQJ-ST-14-40	400		1400	900	12.01	8.46
LQJ-ST-14-50	600	180	1600	1100	14.56	12.45
LQJ-ST-14-60	800		1800	1300	17.29	24.11
LQJ-ST-14-80	1000		2000	1500	19.72	28.83
LQJ-ST-14-100	400		1400	900	14.38	8.46
LQJ-ST-18-60	600	200	1600	1100	16.93	12.54
LQJ-ST-18-80	800		1800	1300	19.66	24.11
LQJ-ST-18-100	1000		2000	1500	22.09	28.83
LQJ-ST-20-40	400		1400	900	17.70	8.46
LQJ-ST-20-60	600	200	1600	1100	21.32	12.54
LQJ-ST-20-80	800		1800	1300	26.21	24.11
LQJ-ST-20-100	1000		2000	1500	31.74	28.83


XQJ-LQJ-ST4型水平四通
LQJ-ST4 Horizontal Cross

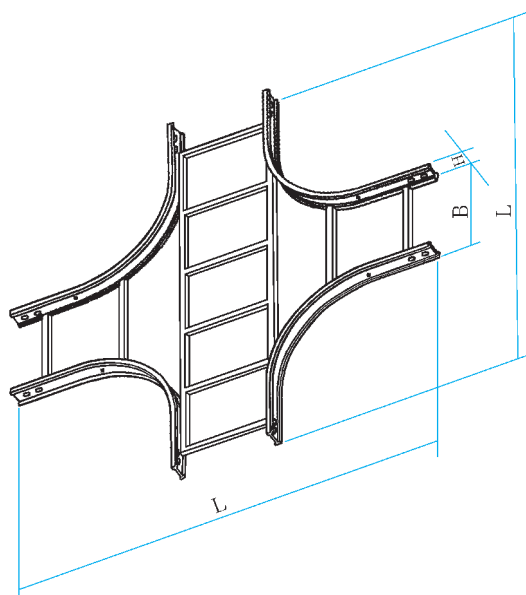

型号 Model	宽度 B	高度 H	L R=300	重量 (kg)	护罩 Cover
LQJ-ST4-6-10	100	60	1100	6.60	2.10
LQJ-ST4-6-20	200		1200	7.80	4.05
LQJ-ST4-6-30	300		1300	9.02	6.27
LQJ-ST4-6-40	400		1400	10.64	11.73
LQJ-ST4-11-20	200	110	1200	9.77	4.05
LQJ-ST4-11-30	300		1300	10.95	6.27
LQJ-ST4-11-40	400		1400	12.59	11.73
LQJ-ST4-11-50	500		1500	13.88	15.60
LQJ-ST4-11-60	600	140	1600	15.15	21.78
LQJ-ST4-11-80	800		1800	18.60	33.48
LQJ-ST4-11-100	1000		2000	22.50	40.09
LQJ-ST4-14-40	400		1400	13.41	11.73
LQJ-ST4-14-50	600	180	1600	15.96	21.78
LQJ-ST4-14-60	800		1800	18.69	33.48
LQJ-ST4-14-80	1000		2000	22.80	40.09
LQJ-ST4-14-100	400		1400	15.78	11.73
LQJ-ST4-18-60	600	200	1600	18.33	21.78
LQJ-ST4-18-80	800		1800	21.06	33.48
LQJ-ST4-18-100	1000		2000	24.21	40.09
LQJ-ST4-20-40	400		1400	21.90	11.73
LQJ-ST4-20-60	600	200	1600	25.76	21.78
LQJ-ST4-20-80	800		1800	30.90	33.48
LQJ-ST4-20-100	1000		2000	36.75	40.09

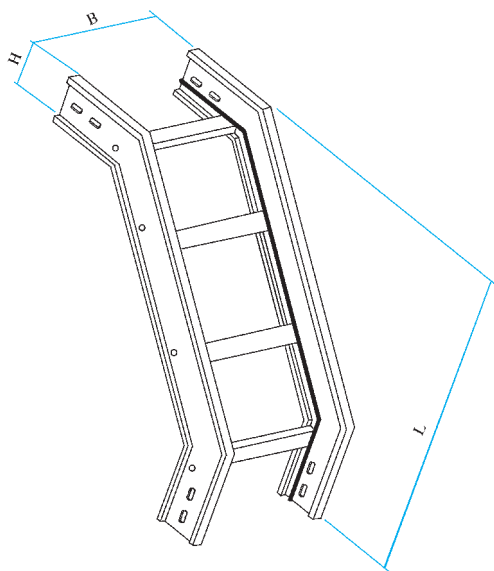LQJ-TRT型凸型二通
LQJ-TRT Vertical Elbow


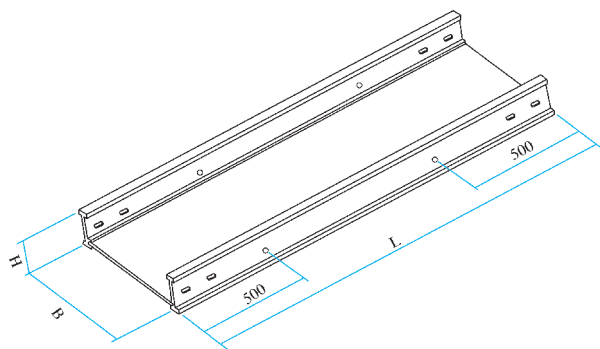
型 号 Model	宽 度 B	高 度 H	L		重 量 (kg)	护 罩 Cover		
			R=300	R=600				
LQJ-TRT-6-10	100	60	560	860	1.40	1.58	0.91	1.32
LQJ-TRT-6-20	200				1.73	3.00	1.48	2.15
LQJ-TRT-6-30	300				2.04	3.56	2.05	2.98
LQJ-TRT-6-40	400				2.39	4.05	3.49	5.08
LQJ-TRT-11-20	200	110	610	910	2.39	3.45	1.62	2.29
LQJ-TRT-11-30	300				2.70	4.01	2.24	3.18
LQJ-TRT-11-40	400				3.00	4.50	3.81	5.43
LQJ-TRT-11-50	500				3.35	5.10	4.66	6.63
LQJ-TRT-11-60	600				3.68	5.55	6.86	9.76
LQJ-TRT-11-80	800				4.32	6.71	8.95	12.73
LQJ-TRT-11-100	1000	140	640	940	4.99	7.80	11.02	15.78
LQJ-TRT-14-40	400				3.00	4.80	3.91	5.53
LQJ-TRT-14-50	600				3.60	5.55	7.11	10.01
LQJ-TRT-14-60	800				4.35	6.98	9.27	13.05
LQJ-TRT-14-80	1000	180	680	980	5.10	8.06	11.42	16.18
LQJ-TRT-14-100	400				3.05	4.86	4.22	5.84
LQJ-TRT-18-60	600				3.65	5.72	7.57	10.47
LQJ-TRT-18-80	800				4.37	7.04	9.87	13.65
LQJ-TRT-18-100	1000	200	700	1000	5.15	8.12	12.15	16.91
LQJ-TRT-20-40	400				5.94	8.55	4.34	5.96
LQJ-TRT-20-60	600				6.90	10.20	7.78	10.68
LQJ-TRT-20-80	800				7.89	11.85	10.15	13.93
LQJ-TRT-20-100	1000				8.85	13.47	12.50	17.26

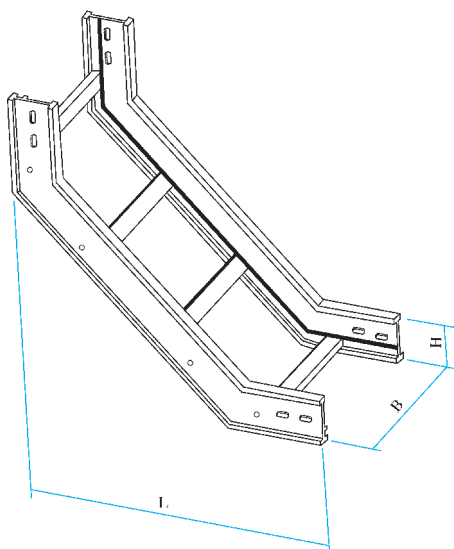LQJ-ART型凹型二通
LQJ-ART Vertical Elbow


型 号 Model	宽 度 B	高 度 H	L		重 量 (kg)	护 罩 Cover		
			R=300	R=600				
LQJ-ART-6-10	100	60	560	860	1.40	1.58	0.81	1.22
LQJ-ART-6-20	200				1.73	3.00	1.32	1.99
LQJ-ART-6-30	300				2.04	3.56	1.83	2.76
LQJ-ART-6-40	400				2.39	4.05	3.09	4.71
LQJ-ART-11-20	200	110	610	910	2.39	3.45	1.32	1.99
LQJ-ART-11-30	300				2.70	4.01	1.82	2.76
LQJ-ART-11-40	400				3.00	4.50	3.09	4.71
LQJ-ART-11-50	500				3.35	5.10	3.76	5.73
LQJ-ART-11-60	600				3.68	5.55	5.54	8.44
LQJ-ART-11-80	800				4.32	6.71	7.23	11.01
LQJ-ART-11-100	1000	140	640	940	4.99	7.80	8.90	13.66
LQJ-ART-14-40	400				3.00	4.80	3.09	4.71
LQJ-ART-14-50	600				3.60	5.55	5.54	8.44
LQJ-ART-14-60	800				4.35	6.98	7.23	11.01
LQJ-ART-14-80	1000	180	680	980	5.10	8.06	8.90	13.66
LQJ-ART-14-100	400				3.05	4.86	3.09	4.71
LQJ-ART-18-60	600				3.65	5.72	5.54	8.44
LQJ-ART-18-80	800				4.37	7.04	7.23	11.01
LQJ-ART-18-100	1000	200	700	1000	5.15	8.12	8.90	13.66
LQJ-ART-20-40	400				5.94	8.55	3.09	4.71
LQJ-ART-20-60	600				6.90	10.20	5.54	8.44
LQJ-ART-20-80	800				7.89	11.85	7.23	11.01
LQJ-ART-20-100	1000				8.85	13.47	8.90	13.66




LQJ-C型槽式桥架
LQJ-C Trough-Shaped Frame




型号 Model	宽度 B	高度 H	重量 (kg)	护罩 Cover
LQJ-C-6-10	100	60	10.09	2.71
LQJ-C-6-20	200		11.10	4.72
LQJ-C-6-30	300		12.09	6.68
LQJ-C-6-40	400		13.13	8.66
LQJ-C-11-20	200	110	14.55	4.72
LQJ-C-11-30	300		15.57	6.68
LQJ-C-11-40	400		16.58	8.66
LQJ-C-11-50	500		19.22	12.75
LQJ-C-11-60	600		21.69	15.11
LQJ-C-11-80	800		29.85	23.13
LQJ-C-11-100	1000	140	35.46	28.63
LQJ-C-14-40	400		19.78	8.66
LQJ-C-14-50	600		21.80	15.11
LQJ-C-14-60	800		30.27	23.13
LQJ-C-14-80	1000	180	36.05	28.63
LQJ-C-14-100	400		24.10	8.66
LQJ-C-18-60	600		26.13	15.11
LQJ-C-18-80	800		30.96	23.13
LQJ-C-18-100	1000	200	36.86	28.63
LQJ-C-20-40	400		23.58	8.66
LQJ-C-20-60	600		31.25	15.11
LQJ-C-20-80	800		40.31	23.13
LQJ-C-20-100	1000		46.95	28.63


LQJ-RC型水平弯通
LQJ-RC Horizontal Elbow

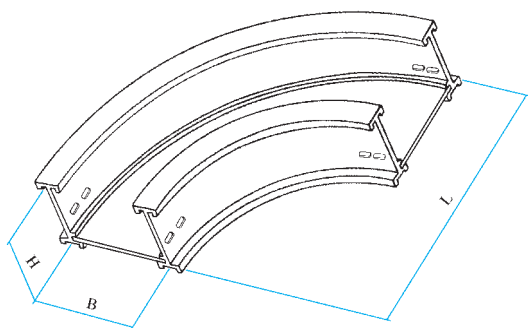

型号 Model	宽度 B	高度 H	L R=300	重量 (kg)	护罩 Cover
LQJ-RC-6-10	100	60	600	3.75	0.84
LQJ-RC-6-20	200		700	4.36	1.62
LQJ-RC-6-30	300		800	5.60	2.51
LQJ-RC-6-40	400		900	6.99	4.70
LQJ-RC-11-20	200	110	700	6.04	1.62
LQJ-RC-11-30	300		800	7.05	2.51
LQJ-RC-11-40	400		900	8.23	4.70
LQJ-RC-11-50	500		1000	9.91	6.24
LQJ-RC-11-60	600		1100	12.56	8.72
LQJ-RC-11-80	800		1200	16.85	13.40
LQJ-RC-11-100	1000	140	1300	23.88	16.02
LQJ-RC-14-40	400		900	14.70	4.70
LQJ-RC-14-50	600		1100	12.76	8.72
LQJ-RC-14-60	800		1300	18.30	13.40
LQJ-RC-14-80	1000	180	1500	24.23	16.02
LQJ-RC-14-100	400		900	16.26	4.70
LQJ-RC-18-60	600		1100	15.62	8.72
LQJ-RC-18-80	800		1300	21.16	13.40
LQJ-RC-18-100	1000	200	1500	24.52	16.02
LQJ-RC-20-40	400		900	16.80	4.70
LQJ-RC-20-60	600		1100	19.19	8.72
LQJ-RC-20-80	800		1300	24.70	13.40
LQJ-RC-20-100	1000		1500	32.93	16.02

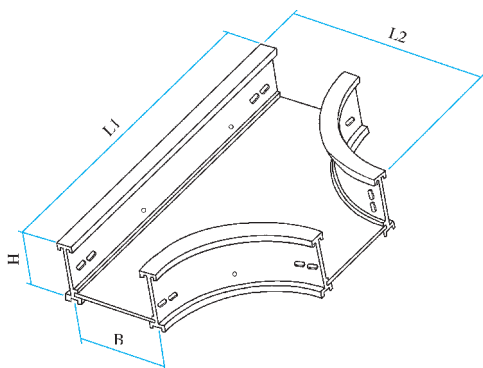LQJ-SC1型水平三通
LQJ-SC Horizontal Elbow


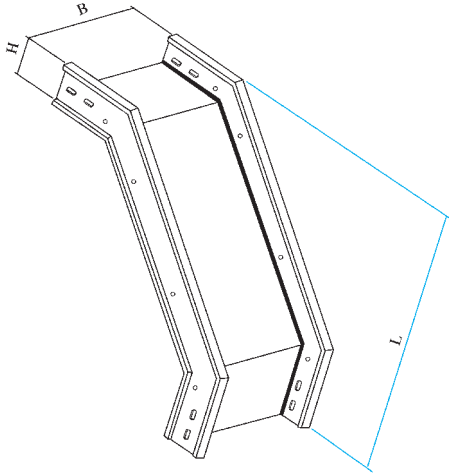
型 号 Model	宽 度 B	高 度 H	L1 R=300	L2 R=300	重 量 (kg)	护 罩 Cover
LQJ-SC-6-10	100	60	1100	600	5.73	1.52
LQJ-SC-6-20	200		1200	700	7.98	2.92
LQJ-SC-6-30	300		1300	800	10.13	4.52
LQJ-SC-6-40	400		1400	900	11.90	8.46
LQJ-SC-11-20	200	110	1200	700	9.62	2.93
LQJ-SC-11-30	300		1300	800	11.82	4.52
LQJ-SC-11-40	400		1400	900	14.64	8.46
LQJ-SC-11-50	500		1500	1000	21.26	11.22
LQJ-SC-11-60	600		1600	1100	25.04	12.54
LQJ-SC-11-80	800		1800	1200	33.11	24.11
LQJ-SC-11-100	1000		2000	1300	44.22	28.83
LQJ-SC-14-40	400	140	1400	900	14.90	8.46
LQJ-SC-14-50	600		1600	1100	22.71	12.45
LQJ-SC-14-60	800		1800	1300	33.29	24.11
LQJ-SC-14-80	1000		2000	1500	44.52	28.83
LQJ-SC-14-100	400	180	1400	900	17.25	8.46
LQJ-SC-18-60	600		1600	1100	24.05	12.54
LQJ-SC-18-80	800		1800	1300	34.73	24.11
LQJ-SC-18-100	1000		2000	1500	44.67	28.83
LQJ-SC-20-40	400	200	1400	900	22.36	8.46
LQJ-SC-20-60	600		1600	1100	46.52	12.54
LQJ-SC-20-80	800		1800	1300	43.88	24.11
LQJ-SC-20-100	1000		2000	1500	56.85	28.83

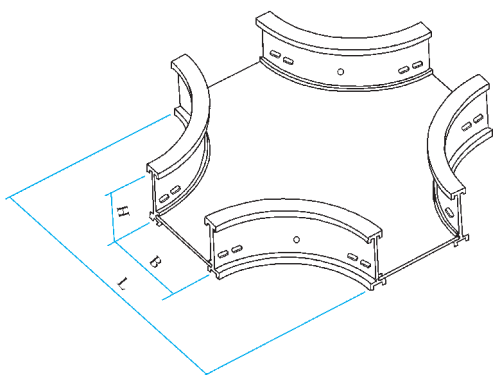LQJ-SC4型水平四通
LQJ-SC4 Horizontal Cross


型 号 Model	宽 度 B	高 度 H	L R=300	重 量 (kg)	护 罩 Cover
LQJ-ST4-6-10	100	60	1100	8.10	2.10
LQJ-ST4-6-20	200		1200	10.74	4.05
LQJ-ST4-6-30	300		1300	13.44	6.27
LQJ-ST4-6-40	400		1400	16.70	11.73
LQJ-ST4-11-20	200	110	1200	12.71	4.05
LQJ-ST4-11-30	300		1300	15.39	6.27
LQJ-ST4-11-40	400		1400	18.65	11.73
LQJ-ST4-11-50	500		1500	24.23	15.60
LQJ-ST4-11-60	600		1600	28.05	21.78
LQJ-ST4-11-80	800		1800	41.84	33.48
LQJ-ST4-11-100	1000		2000	53.82	40.09
LQJ-ST4-14-40	400	140	1400	18.96	11.73
LQJ-ST4-14-50	600		1600	28.35	21.78
LQJ-ST4-14-60	800		1800	41.84	33.48
LQJ-ST4-14-80	1000		2000	54.12	40.09
LQJ-ST4-14-100	400	180	1400	19.05	11.73
LQJ-ST4-18-60	600		1600	28.44	21.78
LQJ-ST4-18-80	800		1800	41.93	33.48
LQJ-ST4-18-100	1000		2000	54.21	40.09
LQJ-ST4-20-40	400	200	1400	27.96	11.73
LQJ-ST4-20-60	600		1600	38.66	21.78
LQJ-ST4-20-80	800		1800	53.84	33.48
LQJ-ST4-20-100	1000		2000	68.07	40.09




LQJ-TRC型凸型三通
LQJ-TRC Vertical Elbow



型号 Model	宽度 B	高度 H	L		重量 (kg)		护罩 Cover	
			R=300	R=600				
LQJ-TRC-6-10	100	60	560	860	1.82	2.21	0.91	1.32
LQJ-TRC-6-20	200				2.66	4.40	1.48	2.15
LQJ-TRC-6-30	300				3.47	5.72	2.05	2.98
LQJ-TRC-6-40	400				4.31	6.96	3.49	5.08
LQJ-TRC-11-20	200	110	610	910	3.32	4.85	1.62	2.29
LQJ-TRC-11-30	300				4.13	6.17	2.24	3.18
LQJ-TRC-11-40	400				4.92	7.41	3.81	5.43
LQJ-TRC-11-50	500				6.57	10.01	4.66	6.63
LQJ-TRC-11-60	600				7.85	11.48	6.86	9.76
LQJ-TRC-11-80	800				10.88	16.64	8.95	12.73
LQJ-TRC-11-100	1000				13.17	20.25	11.02	15.78
LQJ-TRC-14-40	400	140	640	940	4.92	7.71	3.91	5.53
LQJ-TRC-14-50	600				7.50	11.78	7.11	10.01
LQJ-TRC-14-60	800				10.91	16.91	9.27	13.05
LQJ-TRC-14-80	1000				13.32	20.51	11.42	16.18
LQJ-TRC-14-100	400	180	680	980	4.97	7.77	4.22	5.84
LQJ-TRC-18-60	600				7.55	11.84	7.57	10.47
LQJ-TRC-18-80	800				10.95	16.97	9.87	13.65
LQJ-TRC-18-100	1000				13.37	20.57	12.15	16.91
LQJ-TRC-20-40	400	200	700	1000	8.13	11.46	4.34	5.96
LQJ-TRC-20-60	600				10.80	16.13	7.78	10.68
LQJ-TRC-20-80	800				14.45	21.78	10.15	13.93
LQJ-TRC-20-100	1000				17.07	25.92	12.50	17.26

LQJ-ARC型凹型三通
LQJ-ARC Vertical Elbow

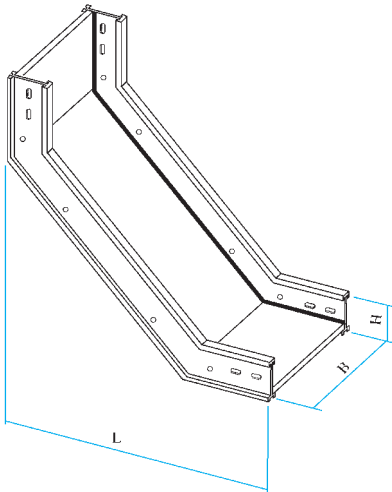



型号 Model	宽度 B	高度 H	L		重量 (kg)		护罩 Cover	
			R=300	R=600				
LQJ-ART-6-10	100	60	560	860	1.88	2.27	0.81	1.22
LQJ-ART-6-20	200				2.76	4.50	1.32	1.99
LQJ-ART-6-30	300				3.65	5.90	1.83	2.76
LQJ-ART-6-40	400				4.26	7.20	3.09	4.71
LQJ-ART-11-20	200	110	610	910	3.53	4.19	1.32	1.99
LQJ-ART-11-30	300				4.44	6.48	1.82	2.76
LQJ-ART-11-40	400				5.36	7.85	3.09	4.71
LQJ-ART-11-50	500				7.31	10.73	3.76	5.73
LQJ-ART-11-60	600				8.45	12.30	5.54	8.44
LQJ-ART-11-80	800				12.33	18.08	7.23	11.01
LQJ-ART-11-100	1000				13.30	22.07	8.90	13.66
LQJ-ART-14-40	400	140	640	940	5.48	8.25	3.09	4.71
LQJ-ART-14-50	600				8.60	12.89	5.54	8.44
LQJ-ART-14-60	800				12.75	18.78	7.23	11.01
LQJ-ART-14-80	1000				15.63	22.88	8.9	13.66
LQJ-ART-14-100	400	180	680	980	4.97	7.77	3.09	4.71
LQJ-ART-18-60	600				7.55	11.84	5.54	8.44
LQJ-ART-18-80	800				10.95	16.97	7.23	11.01
LQJ-ART-18-100	1000				13.37	20.57	8.90	13.66
LQJ-ART-20-40	400	200	700	1000	8.64	12.21	3.09	4.71
LQJ-ART-20-60	600				12.38	17.63	5.54	8.44
LQJ-ART-20-80	800				17.09	24.30	7.23	11.01
LQJ-ART-20-100	1000				20.39	29.09	8.90	13.66

连接件 LQJ-FJ-01

A
B
C

Connector Model LQJ-FJ-01

A
B
C

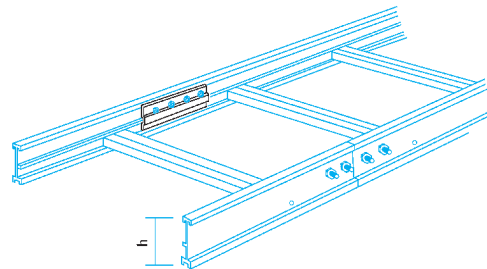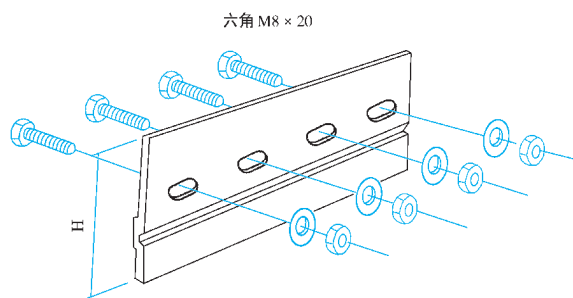



型 号 Model	配套高度 h	H	单价元 / 件 unit/pc	备 注 Remark
LQJ-FJ-01A-60	60	46	9.80	4只连接孔 4 holes in connectors
LQJ-FJ-01A-110	110	96	13.80	
LQJ-FJ-01B-140	140	126	19.50	
LQJ-FJ-01C-180	180	164	24.20	8只连接孔 8 holes in connectors
LQJ-FJ-01C-200	200	184	28.50	

伸缩连接件 LQJ-FJ-02

A
B
C

Connector Model LQJ-FJ-02


A
B
C

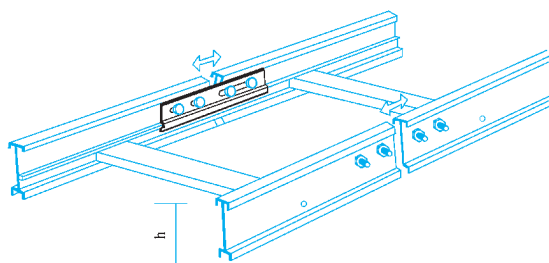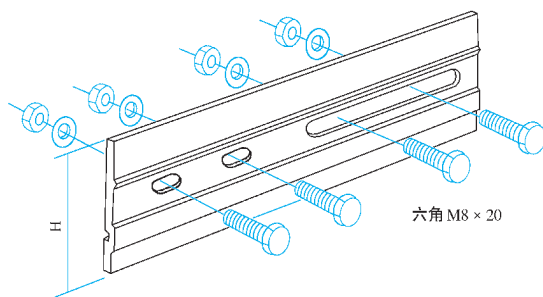


型 号 Model	配套高度 h	H	单价元 / 件 unit/pc	备 注 Remark
LQJ-FJ-02A-60	60	46	9.80	4只连接孔 4 holes in connectors
LQJ-FJ-02A-110	110	96	13.80	
LQJ-FJ-02B-140	140	126	19.50	
LQJ-FJ-02C-180	180	164	24.20	8只连接孔 8 holes in connectors
LQJ-FJ-02C-200	200	184	28.50	



调宽片 LQJ-FJ-03
Width Modulator Model LQJ-FJ-03

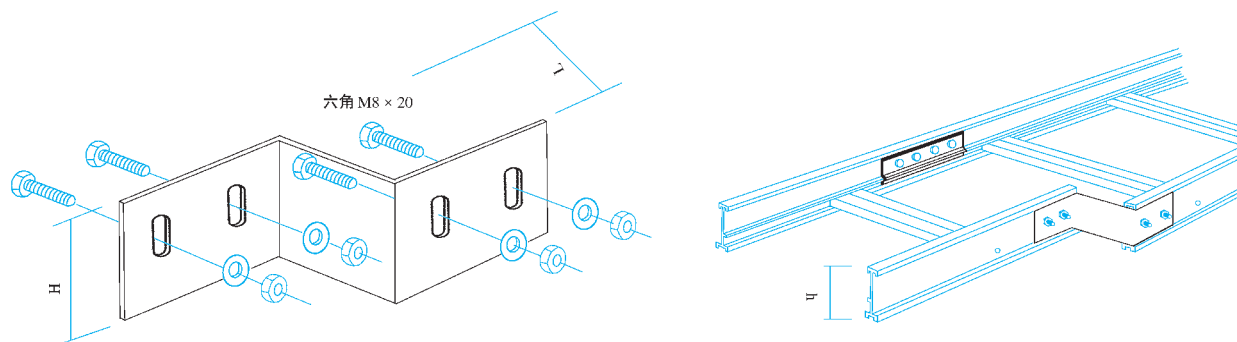



型 号 Model	配套高度 Height		L	单价元/件 unit /price (\$)	型 号 Model	配套高度 Height		L	单价元/件 unit /price (\$)	
	h	H				h	H			
LQJ-FJ-03-1	60	47	50	6.60	LQJ-FJ-03-19	180	165	100	37.20	
LQJ-FJ-03-2			100	9.80	LQJ-FJ-03-20			150	46.20	
LQJ-FJ-03-3			150	13.00	LQJ-FJ-03-21			200	55.20	
LQJ-FJ-03-4			200	16.20	LQJ-FJ-03-22			300	64.20	
LQJ-FJ-03-5			300	21.80	LQJ-FJ-03-23			50	32.30	
LQJ-FJ-03-6	110	90	50	9.20	LQJ-FJ-03-24	200	185	100	41.30	
LQJ-FJ-03-7			100	13.70	LQJ-FJ-03-25			150	50.30	
LQJ-FJ-03-8			150	18.20	LQJ-FJ-03-26			200	59.30	
LQJ-FJ-03-9			200	22.70	LQJ-FJ-03-27			300	68.30	
LQJ-FJ-03-10			250	27.20	备注： Remark 高度h为60、110、140吋4只连接孔 4 holes in connectors of width modulator with a height of 60mm 110mm and 140mm. 高度h为180、200吋8只连接孔 8 holes in connectors of width modulator with a height of 180mm and 200mm.					
LQJ-FJ-03-11			300	31.70						
LQJ-FJ-03-12			400	36.20						
LQJ-FJ-03-13			50	18.00						
LQJ-FJ-03-14	140	127	100	27.10						
LQJ-FJ-03-15			150	36.00						
LQJ-FJ-03-16			200	45.00						
LQJ-FJ-03-17			300	54.00						
LQJ-FJ-03-18			50	28.20						

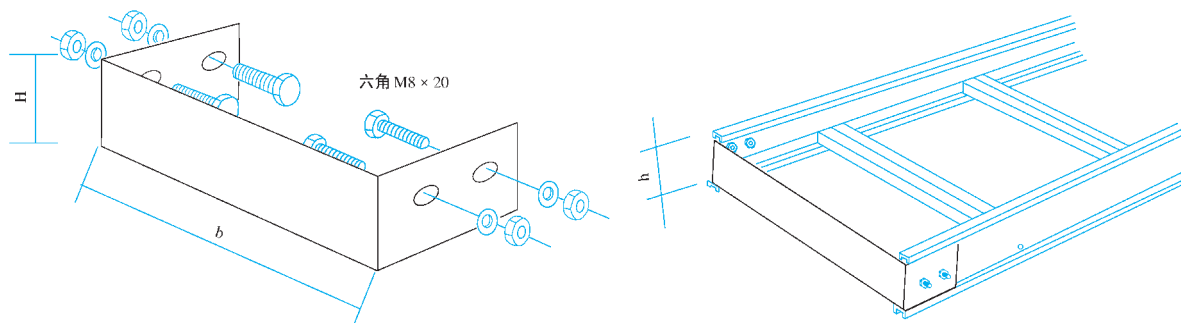终端封头 LQJ-FJ-04
 End Blockate Model LQJ-FJ-04


型号 Model	配套高度 h Height	H	b	重量 (kg) Weight	备注 Remark
LQJ-FJ-04-1	60	47	105	0.08	高度h为60、110、140、时4只连接孔 4 holes in connectors of width modulator with a height of 180mm and 200mm.
LQJ-FJ-04-2			205	0.15	
LQJ-FJ-04-3			305	0.23	
LQJ-FJ-04-4			405	0.30	
LQJ-FJ-04-5	110	97	205	0.33	
LQJ-FJ-04-6			305	0.50	
LQJ-FJ-04-7			405	0.66	
LQJ-FJ-04-8			505	0.83	
LQJ-FJ-04-9			605	0.97	
LQJ-FJ-04-10			805	1.31	
LQJ-FJ-04-11			1005	1.64	
LQJ-FJ-04-12	140	127	405	1.22	
LQJ-FJ-04-13			605	1.82	
LQJ-FJ-04-14			805	2.42	
LQJ-FJ-04-15			1005	3.02	
LQJ-FJ-04-16	180	165	405	1.16	高度h为180、200时8只连接孔 8 holes in connectors of width modulator with a height of 60mm 110mm and 140mm.
LQJ-FJ-04-17			605	1.73	
LQJ-FJ-04-18			805	2.29	
LQJ-FJ-04-19			1005	2.87	
LQJ-FJ-04-20	200	185	405	1.28	
LQJ-FJ-04-21			605	1.91	
LQJ-FJ-04-22			805	2.54	
LQJ-FJ-04-23			1005	3.17	





调高片 LQJ-FJ-05
Height Modvlator
Model LQJ-FJ-05

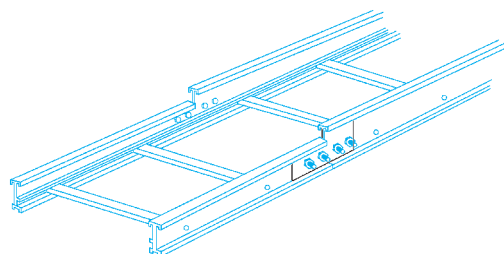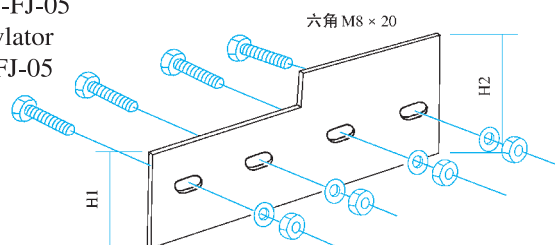



型 号 Model	H ₁	H ₂	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-05-60/110	47	97	10.60	高度60调110 From 60mm to 100mm
LQJ-FJ-05-60/140	47	127	15.10	高度60调140 From 60mm to 140mm
LQJ-FJ-05-110/140	97	127	17.10	高度110调140 From 110mm to 140mm
LQJ-FJ-05-140/180	127	165	21.80	高度140调180 From 140mm to 180mm
LQJ-FJ-05-180/200	165	185	27.30	高度180调200 From 180mm to 200mm

调角片 LQJ-FJ-05
Angle Modvlator
Model LQJ-FJ-05

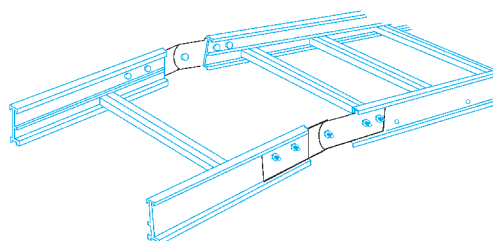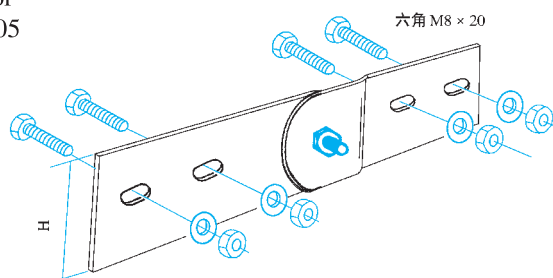



型 号 Model	H	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-06-60	47	18.10	4只连接孔 4 holes in connectors
LQJ-FJ-06-110	97	31.20	
LQJ-FJ-06-140	127	36.80	
LQJ-FJ-06-180	165	42.70	8只连接孔 8 holes in connectors
LQJ-FJ-06-200	185	48.30	

水平转角铰链 LQJ-FJ-08
Horizontal Cornerninge
Model LQJ-FJ-08

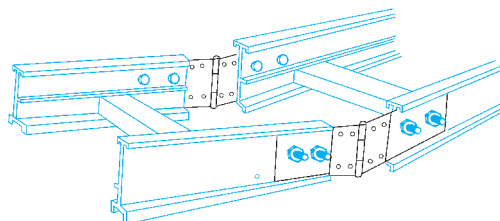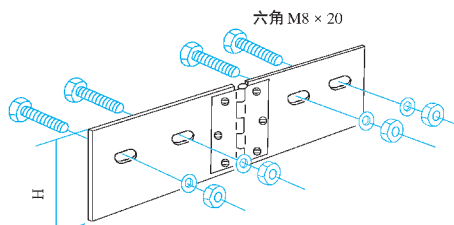



型 号 Model	H	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-08-60	47	20.20	4只连接孔 4 holes in connectors
LQJ-FJ-08-110	97	24.80	
LQJ-FJ-08-140	127	35.80	
LQJ-FJ-08-180	165	41.80	8只连接孔 8 holes in connectors
LQJ-FJ-08-200	185	63.20	

S型压板 LQJ-FJ-09
S-Clamp Model LQJ-FJ-09

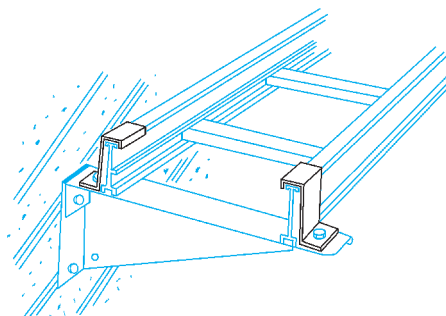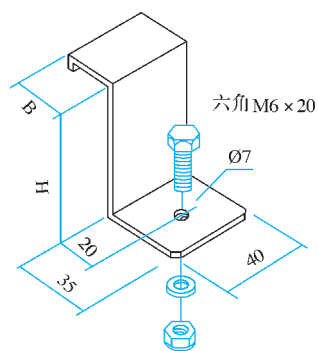

型 号 Model	B	H	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-09-60	27	59.5	8.10	4只连接孔 4 holes in connectors
LQJ-FJ-09-110		109.5	12.80	
LQJ-FJ-09-140		139.5	14.56	
LQJ-FJ-09-180	33	174.5	17.28	8只连接孔 8 holes in connectors
LQJ-FJ-05-200		199.5	18.72	


固定压板 LQJ-FJ-10
Fastener Model LQJ-FJ-10

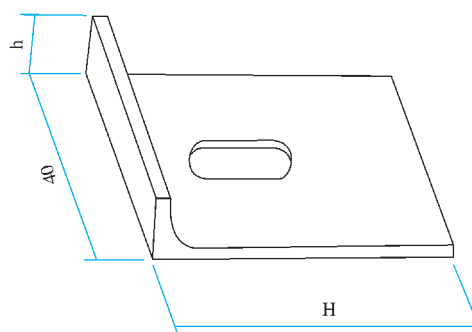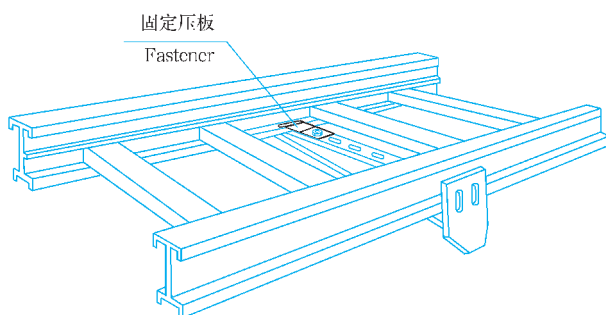

型 号 Model	H	h	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-10-1	43	14	4.8	用于60、110、140 for 60、110、140
LQJ-FJ-10-2	46	16	5.6	用于180、200、for 180、200





隔离板 LQJ-FJ-11
Separating plate Model LQJ-FJ-11

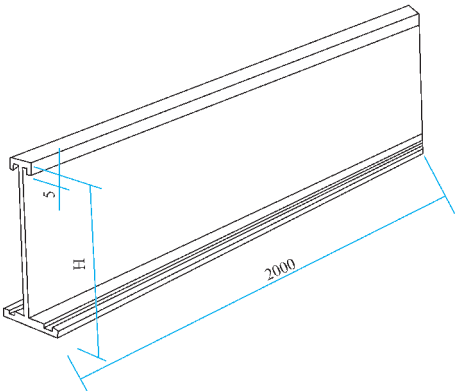


型 号 Model	H	重量 (kg) Weight
LQJ-FJ-11-60	37	1.62
LQJ-FJ-11-110	87	2.67
LQJ-FJ-11-140	117	3.30
LQJ-FJ-11-180	157	4.20
LQJ-FJ-11-200	177	4.58

支架 LQJ-FJ-12
Holding-up frames Model LQJ-FJ-12

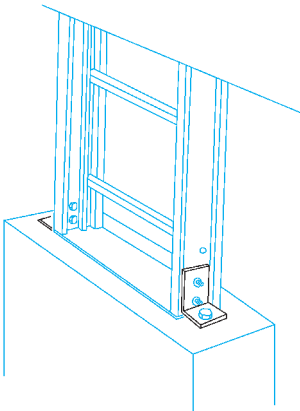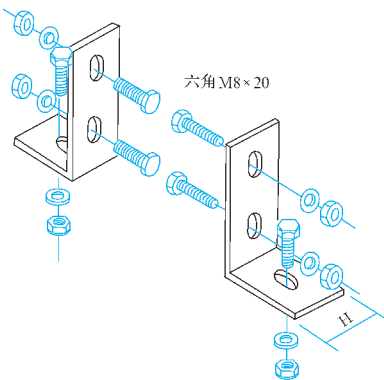


型 号 Model	H	单价元 / 件 unit/price	备 注 Remark
LQJ-FJ-12-60	47	7.68	3只连接孔 3 holes in connectors
LQJ-FJ-12-110	97	16.00	
LQJ-FJ-12-140	127	20.80	
LQJ-FJ-12-180	165	27.20	5只连接孔 5 holes in connectors
LQJ-FJ-12-200	185	30.40	

悬吊器 LQJ-FJ-13
Suspending lustellation Model LQJ-FJ-13




型 号 Model	单价元 / 件 Unit Price	备 注 Remark
LQJ-FJ-13-1	28.50	用于60、110、140 for 60、110、140
LQJ-FJ-13-2	31.60	用于180、200 for 180、200

凸型卡子 LQJ-FJ-18
Convex clip Model LQJ-FJ-18

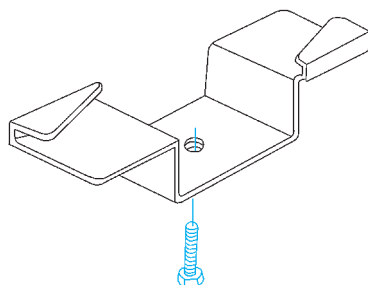


型 号 Model	单价元 / 件 Unit Price	备 注 Remark
LQJ-FJ-18-1	67.5	用于60、110、140 for 60、110、140
LQJ-FJ-18-2	68.3	用于180、200 for 180、200

绝缘垫 LQJ-FJ-19
Insulator Model LQJ-FJ-19

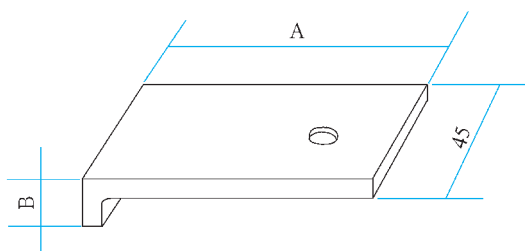

型 号 Model	单价元 / 件 Unit Price	备 注 Remark
LQJ-FJ-19-1	4.6	用于60、110、140 for 60、110、140
LQJ-FJ-19-2	5.2	用于180、200 for 180、200


绝缘垫 LQJ-FJ-20
Insulator Model LQJ-FJ-20

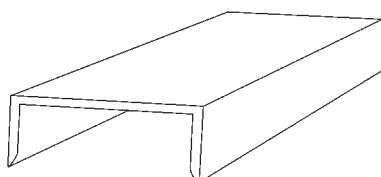

型 号 Model	单价元 / 件 Unit Price	备 注 Remark
LQJ-FJ-20-1	2.4	用于60、110、140 for 60、110、140
LQJ-FJ-20-2	2.8	用于180、200 for 180、200




槽式立柱 XQJ-LQJ-H-01A
E-Channel Column Model LQJ-H-01A

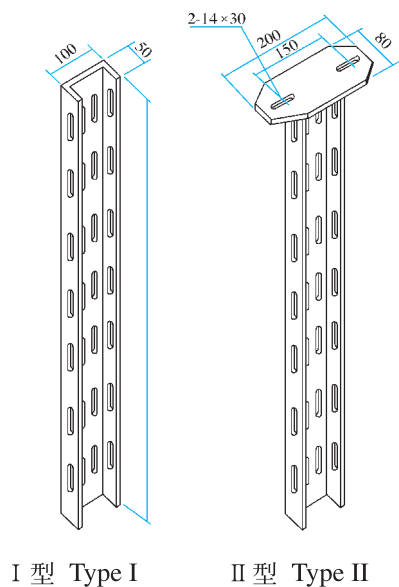


型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-H-01A-3	300	1.30	II 型每件加重1kg Additional 1kg per piece for Type II
LQJ-H-01A-5	500	2.16	
LQJ-H-01A-8	800	3.46	
LQJ-H-01A-10	1000	4.32	
LQJ-H-01A-15	1500	6.48	
LQJ-H-01A-20	2000	8.64	


槽式立柱 XQJ-LQJ-H-01B
E-Channel Column Model LQJ-H-01B

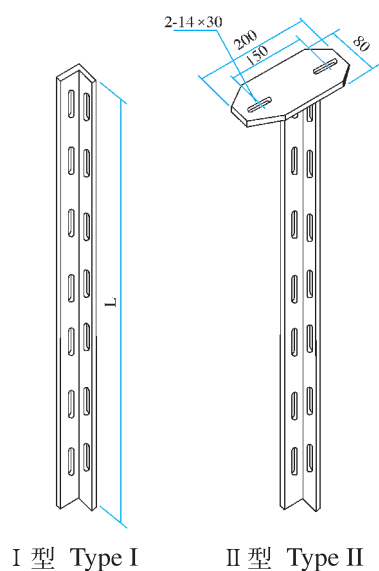


型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-H-01B-3	300	0.9	II 型每件加重1kg Additional 1kg per piece for Type II
LQJ-H-01B-5	500	1.15	
LQJ-H-01B-8	800	2	
LQJ-H-01B-10	1000	3.05	
LQJ-H-01B-15	1500	4.2	
LQJ-H-01B-20	2000	5.9	

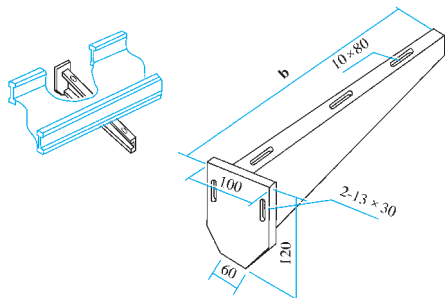托臂XQJ-LQJ-TB-01 Corbel Model LQJ-TB-01


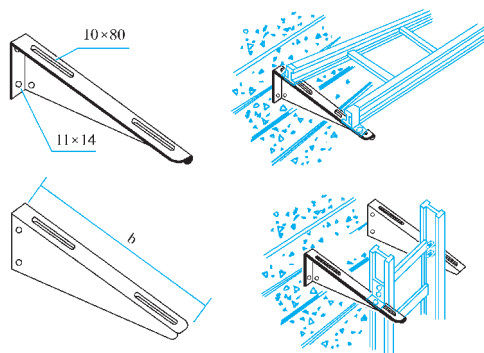
型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-TB-01-150	250	0.77	连接螺栓M12 Linked to bolts M12
LQJ-TB-01-200	300	0.83	
LQJ-TB-01-300	400	0.97	
LQJ-TB-01-400	500	1.15	
LQJ-TB-01-500	600	1.38	
LQJ-TB-01-600	700	1.61	
LQJ-TB-01-800	900	2.08	
LQJ-TB-01-1000	1100	2.68	

托臂XQJ-LQJ-TB-02 Corbel Model LQJ-TB-02


型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-TB-02-150	250	2.4	连接螺栓M12 Linked to bolts M12
LQJ-TB-02-200	300	2.7	
LQJ-TB-02-300	400	3.3	
LQJ-TB-02-400	500	3.9	
LQJ-TB-02-500	600	4.5	
LQJ-TB-02-600	700	5.6	
LQJ-TB-02-800	900	6.3	
LQJ-TB-02-1000	1100	7.5	

托臂XQJ-LQJ-TB-03 Corbel Model LQJ-TB-03


型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-TB-03-150	250	0.59	连接螺栓M12 × 35 Linked to bolts M12 × 35
LQJ-TB-03-200	300	0.62	
LQJ-TB-03-300	400	0.85	
LQJ-TB-03-400	500	1.08	
LQJ-TB-03-500	600	1.31	
LQJ-TB-03-600	700	1.54	
LQJ-TB-03-800	900	2.01	
LQJ-TB-03-1000	1100	2.46	


托臂XQJ-LQJ-TB-04 Corbel Model LQJ-TB-04


型 号 Model	规格b Specification	重量 kg / 件 Wt kg/pc	备 注 Remark
LQJ-TB-04-150	250	0.63	连接螺栓M8 × 25 Linked to bolts M8 × 25
LQJ-TB-04-200	300	0.87	
LQJ-TB-04-300	400	1.13	
LQJ-TB-04-400	500	1.37	
LQJ-TB-04-500	600	2.15	
LQJ-TB-04-600	700	2.28	
LQJ-TB-04-700	800	3.89	
LQJ-TB-04-800	900	4.53	
LQJ-TB-04-1000	1100	5.40	




悬吊式横梁及吊杆 XQJ-LQJ-H-02A-02B

Cable Trays Beams and Sling Model XQJ-LQJ-H-02A-02B




型 号 Model	b	a	重量 kg / 件 Wt kg/pc
02B-5	500	60	1.43
02B-6	600	60	1.72
02B-8	800	80	2.59
02B-10	1000	80	3.23
02B-12	1200	80	3.88

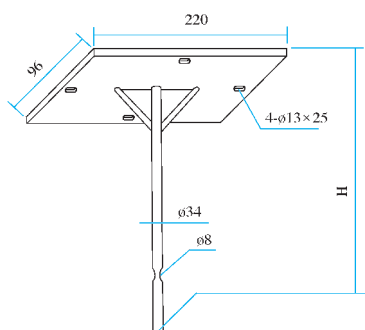


型 号 Model	H	重量 kg / 件 Wt kg/pc
02A-5	500	2.68
02A-6	1000	4.59
02A-8	1500	6.50
02A-10	2000	8.42
02A-12	2500	10.33

悬吊式横梁及吊杆 XQJ-LQJ-H-02B-02C

Cable Trays Beams and Sling Model XQJ-LQJ-H-02B-02C

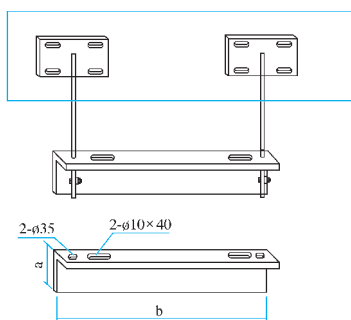

型 号 Model	b	a	重量 kg / 件 Wt kg/pc
02B-5	500	60	1.43
02B-6	600	60	1.72
02B-8	800	80	2.59
02B-10	1000	80	3.23
02B-12	1200	80	3.88





型 号 Model	H	重量 kg / 件 Wt kg/pc
02C-5	500	2.51
02C-6	1000	4.46
02C-8	1500	6.47
02C-10	2000	8.34
02C-12	2500	10.31

型式和技术参数

- 1.XQJ-LQJ 系列铝合金桥架可分为梯级式、槽式，分别用T、C表示。
- 2.梯级式桥架具有良好的通风性能，不防尘，不防干扰。槽式桥架具有防尘、防干扰性能。
- 3.桥架长度 $\leq 6\text{m}$ ，当长度 $>6\text{m}$ 时可接受特殊订货。
- 4.梯级式、槽式载荷性能参照下图：

TYPES AND TECHNICAL PARAMETRES

- 1.LQJ series of aluminum alloy dridge frames can be divided into ladder-shaped and troughshaped ones, separa tely represented by T、C.
- 2.Ladder-shaped frames have function of being ventilated, non dust-proof and non-disurbance-proof.
- 3.The cable tray Length is not more than 6 meters. When it is more than 6 meters, we may accept special orders.
- 4.The functqdions of the ladder-shape, trough-shape refer to the following charts.

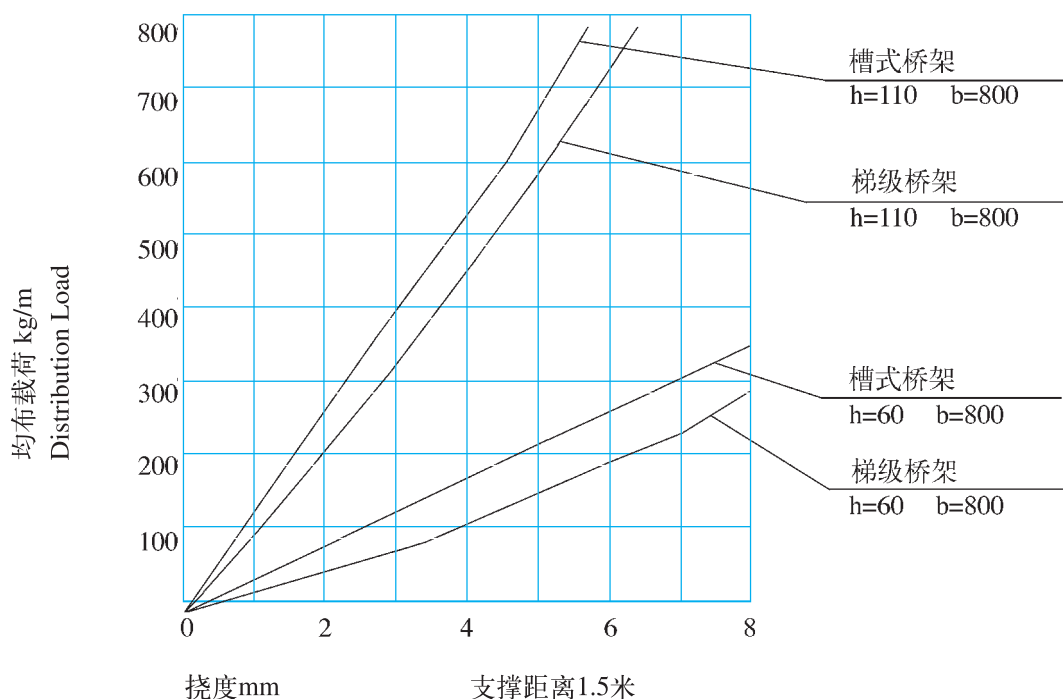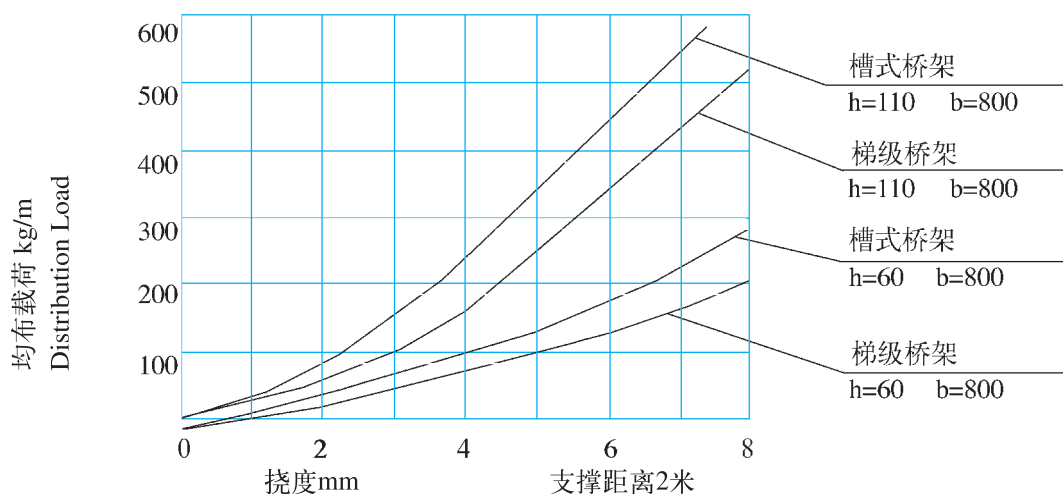



防火电缆桥架 FQJ系列

FQJ系列电缆桥架有良好的绝热、防火、耐腐和适用于广泛环境的性能，还具有重量轻、承载力大、安全可靠的特点，技术上达到了国内先进水平。

对于不同使用场合，FQJ系列防火槽盒可分为四部分：

1) 耐火型全封闭槽盒：该产品适用于10KV以下电力电缆，以及控制电缆、照明配线等室内室外架空电缆沟、隧道的敷设。

2) 耐火型半封闭槽盒：该产品能够经受火焰熏烤，槽内温度可以限制在电缆安全运行允许值内，盒盖为双层盖板。除了有防雨功能外，在遇高温时可自动下落，盖住散热孔，隔绝空气。

3) 电缆隧道用耐火槽盒：该产品可广泛用隧道、地下公共设施等场合。具有良好的通风透气性，当槽盒着火或电缆过热时，由于火焰作用使原来开启的浸有特种防火涂料的通风网孔堵塞，并膨胀成厚厚的碳屑包复电缆，网上小盖自动下落，盖住网面，使燃烧介质缺氧自熄。

4) 耐火型无机槽盒：该产品用无机材料与增强玻璃纤维构成，耐火结构为全封闭式，有效防止电缆自燃及外部火种的危害。另由于选用无机材料，特别适用于酸、碱腐蚀严重的场合。

Fire-proof Cables FQJ series

FQJ series of cable have good function like heat insulation, fire-proof, corrosion-resisting and also are suitable for wide-ranging environment. They have characteristics of light weight, heavy load and reliable safety, and also have reached the advanced standard in country.

FQJ series of fire-proof channel box can be divided into four parts as follows according to different use occasions.


(1).Fully-sealed channel box of fire-proof type: The product suits the power cable below 10kv, and also suits the control cable, lightning lines to be laid in the aerial cable ditch and channel indoors or outdoors.

(2).Half-sealed channel box of the fire-proof type: The product can experience flame stifling, temperature in the channel can be limited to be permitted value for the safety motion of cable. The box cover is double board. Besides the function against rain, it can fall automatically when temperature is high enough, covering the cooling hole to avoid air.

(3).Fire-proof channel box for cable tunnel: The product is widely-used for the tunnel, some underground public facilities and some other occasions. It's well ventilated. When the channel box catches fire or the cable is hotter, the opened ventilated mesh soaked with special refractory coating is blocked because of the flames, and also expanded to thick carbon bits covering the cable, the small cover on the net falls automatically to cover the net face, as a result, causing the burning medium to go out because of the absence of Oxygen.


(4).Inorganic channel box of fire-proof type: The product is formed with the inorganic material and strengthened glass fibre. The refractory structure is fully sealed. It can prevent efficiently the self-burning of the cable and the danger of the outer kindling material. Because of inorganic material, it is especially suitable for the occasions of serious acid and alkali corrosion.

耐火型全封闭槽盒 FQJ-01A

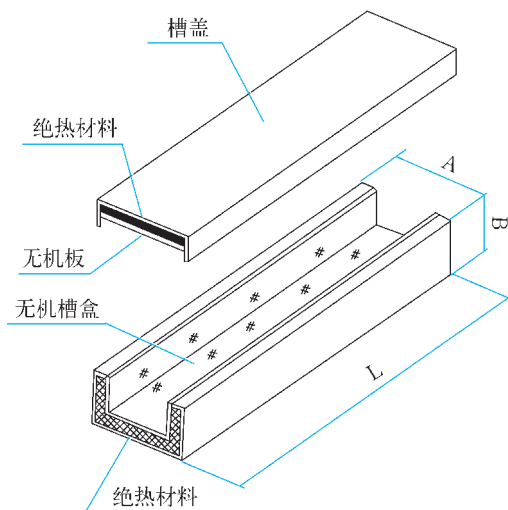

型 格 Model	外 型 尺 寸		内截面 宽×高	
	槽 宽	边 高		
FQJ-01A-15a	150	100	100	60
FQJ-01A-20a	200	100	150	60
FQJ-01A-30a	300	100	250	60
FQJ-01A-40a	400	100	350	60
FQJ-01A-20b	200	150	150	110
FQJ-01A-30b	300	150	250	110
FQJ-01A-40b	400	150	350	110
FQJ-01A-50b	500	150	450	110
FQJ-01A-30c	300	200	250	160
FQJ-01A-40c	400	200	350	160
FQJ-01A-50c	500	200	450	160
FQJ-01A-60c	600	200	550	160
FQJ-01A-40d	400	250	350	210
FQJ-01A-50d	500	250	450	210
FQJ-01A-60d	600	250	550	210
FQJ-01A-80d	800	250	750	210
FQJ-01A-50e	500	300	450	260
FQJ-01A-60e	600	300	550	260


耐火型半封闭槽盒 FQJ-01B

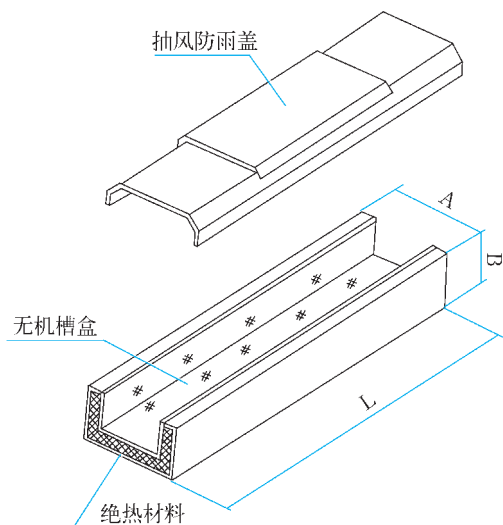

型 格 Model	外 型 尺 寸		内截面 宽×高	
	槽 宽	边 高		
FQJ-01B-15a	150	100	100	60
FQJ-01B-20a	200	100	150	60
FQJ-01B-30a	300	100	250	60
FQJ-01B-40a	400	100	350	60
FQJ-01B-20b	200	150	150	110
FQJ-01B-30b	300	150	250	110
FQJ-01B-40b	400	150	350	110
FQJ-01B-50b	500	150	450	110
FQJ-01B-30c	300	200	250	160
FQJ-01B-40c	400	200	350	160
FQJ-01B-50c	500	200	450	160
FQJ-01B-60c	600	200	550	160
FQJ-01B-40d	400	250	350	210
FQJ-01B-50d	500	250	450	210
FQJ-01B-60d	600	250	550	210
FQJ-01B-80d	800	250	7x50	210
FQJ-01B-50e	500	300	450	260
FQJ-01B-60e	600	300	550	260




电缆隧道用耐火槽盒 FQJ-01C

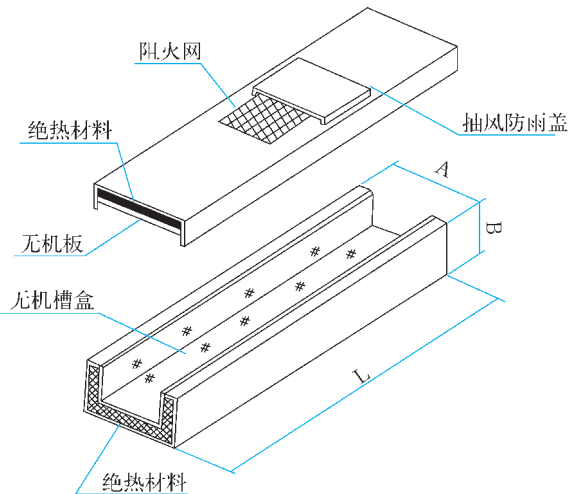


型 格 Model	外 型 尺 寸		内截面 宽×高	
	槽 宽	边 高		
FQJ-01C-15a	150	100	100	60
FQJ-01C-20a	200	100	150	60
FQJ-01C-30a	300	100	250	60
FQJ-01C-40a	400	100	350	60
FQJ-01C-20b	200	150	150	110
FQJ-01C-30b	300	150	250	110
FQJ-01C-40b	400	150	350	110
FQJ-01C-50b	500	150	450	110
FQJ-01C-30c	300	200	250	160
FQJ-01C-40c	400	200	350	160
FQJ-01C-50c	500	200	450	160
FQJ-01C-60c	600	200	550	160
FQJ-01C-40d	400	250	350	210
FQJ-01C-50d	500	250	450	210
FQJ-01C-60d	600	250	550	210
FQJ-01C-80d	800	250	750	210
FQJ-01C-50e	500	300	450	260
FQJ-01C-60e	600	300	550	260

耐火型无机槽盒 FQJ-01D

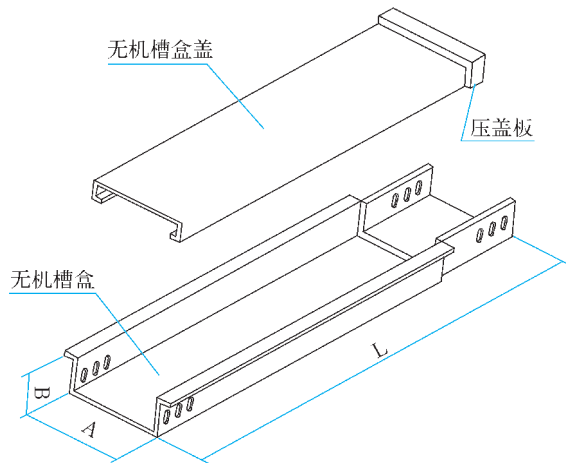


型 格 Model	外 型 尺 寸		内截面 宽×高	
	槽 宽	边 高		
FQJ-01D-15a	150	100	130	80
FQJ-01D-20a	200	100	180	80
FQJ-01D-30a	300	100	180	80
FQJ-01D-40a	400	100	380	80
FQJ-01D-20b	200	150	180	130
FQJ-01D-30b	300	150	280	130
FQJ-01D-40b	400	150	380	130
FQJ-01D-50b	500	150	480	130
FQJ-01D-30c	300	200	280	180
FQJ-01D-40c	400	200	380	180
FQJ-01D-50c	500	200	480	180
FQJ-01D-60c	600	200	580	180
FQJ-01D-40d	400	250	380	230
FQJ-01D-50d	500	250	480	230
FQJ-01D-60d	600	250	580	230
FQJ-01D-80d	800	250	780	230
FQJ-01D-50e	500	300	480	280
FQJ-01D-60e	600	300	580	280

水平弯通 FQJ-PW-02A

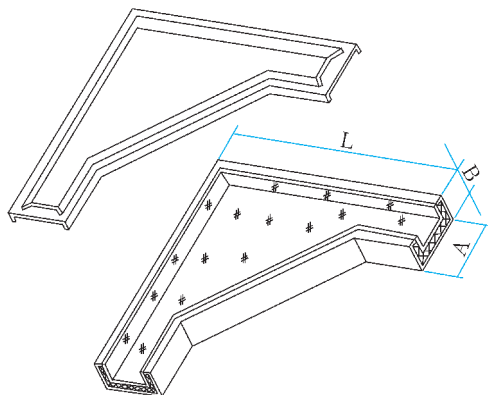

型 格 Model	外 型 尺 寸			内截面 宽×高	
	槽 宽	边 高	L1		
FQJ-PW-02A-15a	150	100	450	100	60
FQJ-PW-02A-20a	200	100	500	150	60
FQJ-PW-02A-30a	300	100	600	250	60
FQJ-PW-02A-40a	400	100	700	350	60
FQJ-PW-02A-20b	200	150	500	150	110
FQJ-PW-02A-30b	300	150	600	250	110
FQJ-PW-02A-40b	400	150	700	350	110
FQJ-PW-02A-50b	500	150	800	450	110
FQJ-PW-02A-30c	300	200	600	250	160
FQJ-PW-02A-40c	400	200	700	350	160
FQJ-PW-02A-50c	500	200	800	450	160
FQJ-PW-02A-60c	600	200	900	550	160
FQJ-PW-02A-40d	400	250	700	350	210
FQJ-PW-02A-50d	500	250	800	450	210
FQJ-PW-02A-60d	600	250	900	550	210
FQJ-PW-02A-80d	800	250	1100	750	210
FQJ-PW-02A-50e	500	300	800	450	260
FQJ-PW-02A-60e	600	300	900	550	260


变径直通 FQJ-BJ-02A

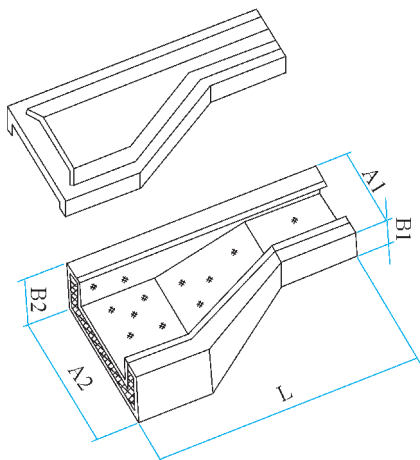

型 格 Model	外 型 尺 寸			内截面	
	A1×B1	A2×B2	L	a1×b1	a2×b2
FQJ-BJ-02A-20a-1	200×100	300×150	400	150×60	250×110
FQJ-BJ-02A-20a-2	200×100	400×200	500	150×60	350×160
FQJ-BJ-02A-20a-3	200×100	500×200	600	150×60	450×160
FQJ-BJ-02A-20a-4	200×100	600×200	700	150×60	550×160
FQJ-BJ-02A-30b-1	300×150	400×200	500	250×110	350×160
FQJ-BJ-02A-30b-2	300×150	500×200	600	250×110	450×160
FQJ-BJ-02A-30b-3	300×150	600×200	700	250×110	550×160
FQJ-BJ-02A-30b-4	300×150	800×200	900	250×110	750×160
FQJ-BJ-02A-40c-1	400×200	500×200	500	350×160	450×160
FQJ-BJ-02A-40c-2	400×200	600×200	600	350×160	550×160
FQJ-BJ-02A-40c-3	400×200	800×200	800	350×160	750×160
FQJ-BJ-02A-50d-1	500×200	600×200	500	450×160	550×160
FQJ-BJ-02A-50d-2	500×200	800×200	700	450×160	750×160
FQJ-BJ-02A-60e-1	600×200	800×200	600	550×160	750×160




垂直上弯通 FQJ-SW-02A

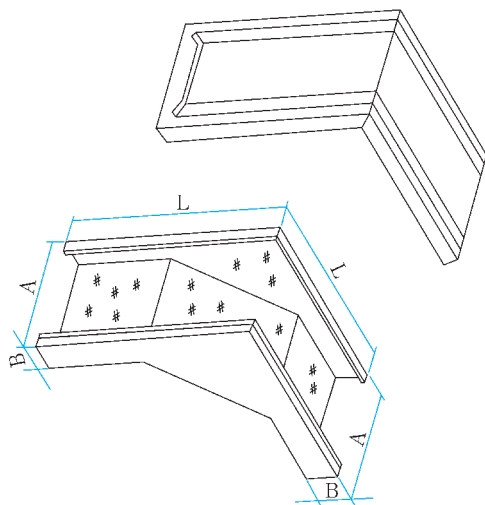


型 格 Model	外 型 尺 寸			内截面 宽×高	
	槽 宽	边 高	L		
FQJ-SW-02A-15a	150	100	400	100	60
FQJ-SW-02A-20a	200	100	400	150	60
FQJ-SW-02A-30a	300	100	400	250	60
FQJ-SW-02A-40a	400	100	400	350	60
FQJ-SW-02A-20b	200	150	450	150	110
FQJ-SW-02A-30b	300	150	450	250	110
FQJ-SW-02A-40b	400	150	450	350	110
FQJ-SW-02A-50b	500	150	450	450	110
FQJ-SW-02A-30c	300	200	500	250	160
FQJ-SW-02A-40c	400	200	500	350	160
FQJ-SW-02A-50c	500	200	500	450	160
FQJ-SW-02A-60c	600	200	500	550	160
FQJ-SW-02A-40d	400	250	550	350	210
FQJ-SW-02A-50d	500	250	550	450	210
FQJ-SW-02A-60d	600	250	550	550	210
FQJ-SW-02A-80d	800	250	550	750	210
FQJ-SW-02A-50e	500	300	600	450	260
FQJ-SW-02A-60e	600	300	600	550	260

垂直下弯通 FQJ-XW-02B

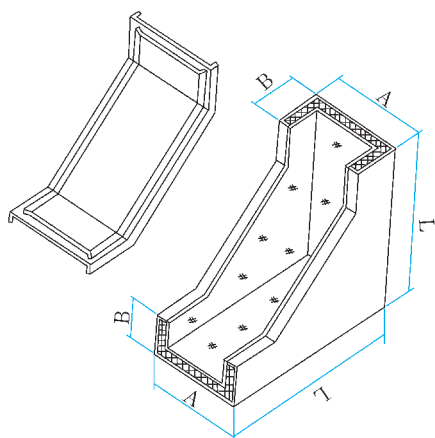


型 格 Model	外 型 尺 寸			内截面 宽×高	
	槽 宽	边 高	L		
FQJ-XW-02B-15a	150	100	400	100	60
FQJ-XW-02B-20a	200	100	400	150	60
FQJ-XW-02B-30a	300	100	400	250	60
FQJ-XW-02B-40a	400	100	400	350	60
FQJ-XW-02B-20b	200	150	450	150	110
FQJ-XW-02B-30b	300	150	450	250	110
FQJ-XW-02B-40b	400	150	450	350	110
FQJ-XW-02B-50b	500	150	450	450	110
FQJ-XW-02B-30c	300	200	500	250	160
FQJ-XW-02B-40c	400	200	500	350	160
FQJ-XW-02B-50c	500	200	500	450	160
FQJ-XW-02B-60c	600	200	500	550	160
FQJ-XW-02B-40d	400	250	550	350	210
FQJ-XW-02B-50d	500	250	550	450	210
FQJ-XW-02B-60d	600	250	550	550	210
FQJ-XW-02B-80d	800	250	550	750	210
FQJ-XW-02B-50e	500	300	600	450	260
FQJ-XW-02B-60e	600	300	600	550	260

垂直左上弯通 FQJ-SW-02C

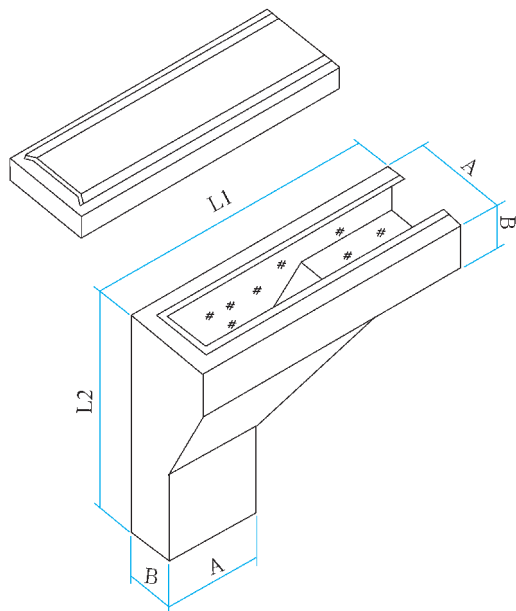

型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-SW-02C-15a	150	100	450	400	100	60
FQJ-SW-02C-20a	200	100	500	400	150	60
FQJ-SW-02C-30a	300	100	600	400	250	60
FQJ-SW-02C-40a	400	100	700	400	350	60
FQJ-SW-02C-20b	200	150	500	450	150	110
FQJ-SW-02C-30b	300	150	600	450	250	110
FQJ-SW-02C-40b	400	150	700	450	350	110
FQJ-SW-02C-50b	500	150	800	450	450	110
FQJ-SW-02C-30c	300	200	600	500	250	160
FQJ-SW-02C-40c	400	200	700	500	350	160
FQJ-SW-02C-50c	500	200	800	500	450	160
FQJ-SW-02C-60c	600	200	900	500	550	160
FQJ-SW-02C-40d	400	250	700	550	350	210
FQJ-SW-02C-50d	500	250	800	550	450	210
FQJ-SW-02C-60d	600	250	900	550	550	210
FQJ-SW-02C-80d	800	250	1100	550	750	210
FQJ-SW-02C-50e	500	300	800	600	450	260
FQJ-SW-02C-60e	600	300	900	600	550	260


垂直左下弯通 FQJ-XW-02D

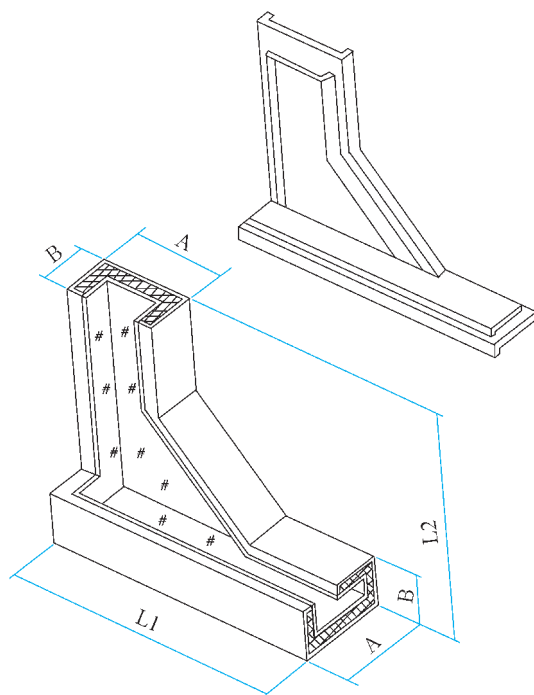

型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XW-02D-15a	150	100	450	400	100	60
FQJ-XW-02D-20a	200	100	500	400	150	60
FQJ-XW-02D-30a	300	100	600	400	250	60
FQJ-XW-02D-40a	400	100	700	400	350	60
FQJ-XW-02D-20b	200	150	500	450	150	110
FQJ-XW-02D-30b	300	150	600	450	250	110
FQJ-XW-02D-40b	400	150	700	450	350	110
FQJ-XW-02D-50b	500	150	800	450	450	110
FQJ-XW-02D-30c	300	200	600	500	250	160
FQJ-XW-02D-40c	400	200	700	500	350	160
FQJ-XW-02D-50c	500	200	800	500	450	160
FQJ-XW-02D-60c	600	200	900	500	550	160
FQJ-XW-02D-40d	400	250	700	550	350	210
FQJ-XW-02D-50d	500	250	800	550	450	210
FQJ-XW-02D-60d	600	250	900	550	550	210
FQJ-XW-02D-80d	800	250	1100	550	750	210
FQJ-XW-02D-50e	500	300	800	600	450	260
FQJ-XW-02D-60e	600	300	900	600	550	260




垂直右上弯通 FQJ-SW-02E

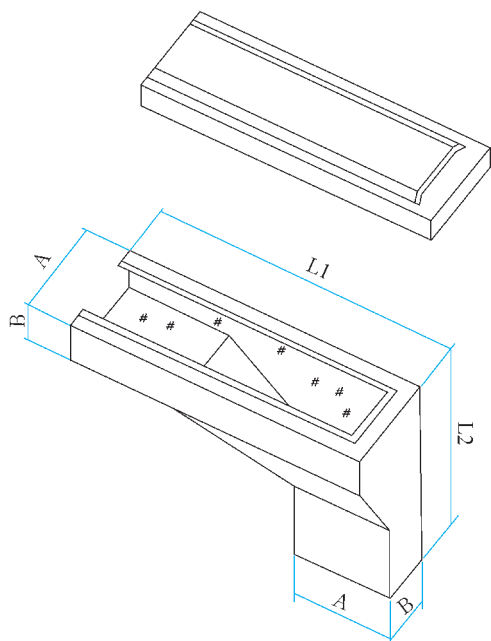


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-SW-02E-15a	150	100	450	400	100	60
FQJ-SW-02E-20a	200	100	500	400	150	60
FQJ-SW-02E-30a	300	100	600	400	250	60
FQJ-SW-02E-40a	400	100	700	400	350	60
FQJ-SW-02E-20b	200	150	500	450	150	110
FQJ-SW-02E-30b	300	150	600	450	250	110
FQJ-SW-02E-40b	400	150	700	450	350	110
FQJ-SW-02E-50b	500	150	800	450	450	110
FQJ-SW-02E-30c	300	200	600	500	250	160
FQJ-SW-02E-40c	400	200	700	500	350	160
FQJ-SW-02E-50c	500	200	800	500	450	160
FQJ-SW-02E-60c	600	200	900	500	550	160
FQJ-SW-02E-40d	400	250	700	550	350	210
FQJ-SW-02E-50d	500	250	800	550	450	210
FQJ-SW-02E-60d	600	250	900	550	550	210
FQJ-SW-02E-80d	800	250	1100	550	750	210
FQJ-SW-02E-50e	500	300	800	600	450	260
FQJ-SW-02E-60e	600	300	900	600	550	260

垂直右下弯通 FQJ-XW-02F

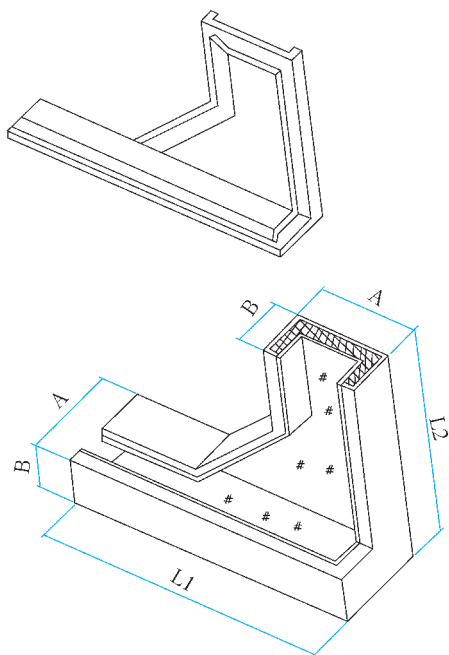


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XW-02F-15a	150	100	450	400	100	60
FQJ-XW-02F-20a	200	100	500	400	150	60
FQJ-XW-02F-30a	300	100	600	400	250	60
FQJ-XW-02F-40a	400	100	700	400	350	60
FQJ-XW-02F-20b	200	150	500	450	150	110
FQJ-XW-02F-30b	300	150	600	450	250	110
FQJ-XW-02F-40b	400	150	700	450	350	110
FQJ-XW-02F-50b	500	150	800	450	450	110
FQJ-XW-02F-30c	300	200	600	500	250	160
FQJ-XW-02F-40c	400	200	700	500	350	160
FQJ-XW-02F-50c	500	200	800	500	450	160
FQJ-XW-02F-60c	600	200	900	500	550	160
FQJ-XW-02F-40d	400	250	700	550	350	210
FQJ-XW-02F-50d	500	250	800	550	450	210
FQJ-XW-02F-60d	600	250	900	550	550	210
FQJ-XW-02F-80d	800	250	1100	550	750	210
FQJ-XW-02F-50e	500	300	800	600	450	260
FQJ-XW-02F-60e	600	300	900	600	550	260

水平三通 FQJ-ST-03A

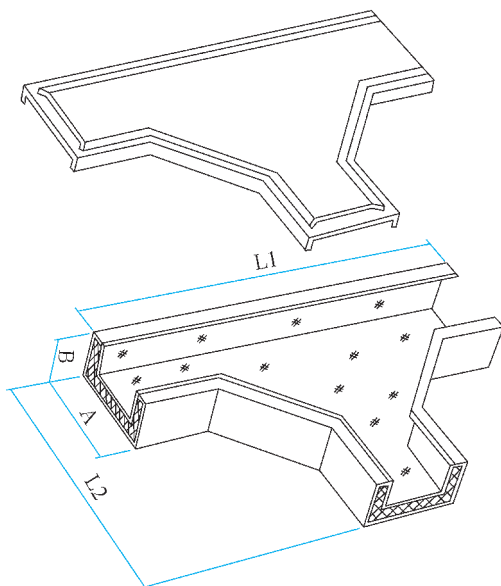

型 格 Model	外 型 尺 寸				内截面 宽 × 高	
	槽 宽	边 高	L1	L2		
FQJ-ST-03A-15a	150	100	750	450	100	60
FQJ-ST-03A-20a	200	100	800	500	150	60
FQJ-ST-03A-30a	300	100	900	600	250	60
FQJ-ST-03A-40a	400	100	1000	700	350	60
FQJ-ST-03A-20b	200	150	800	500	150	110
FQJ-ST-03A-30b	300	150	900	600	250	110
FQJ-ST-03A-40b	400	150	1000	700	350	110
FQJ-ST-03A-50b	500	150	1100	800	450	110
FQJ-ST-03A-30c	300	200	900	600	250	160
FQJ-ST-03A-40c	400	200	1000	700	350	160
FQJ-ST-03A-50c	500	200	1100	800	450	160
FQJ-ST-03A-60c	600	200	1200	900	550	160
FQJ-ST-03A-40d	400	250	1000	700	350	210
FQJ-ST-03A-50d	500	250	1100	800	450	210
FQJ-ST-03A-60d	600	250	1200	900	550	210
FQJ-ST-03A-80d	800	250	1400	1100	750	210
FQJ-ST-03A-50e	500	300	1100	800	450	260
FQJ-ST-03A-60e	600	300	1200	900	550	260


上垂直三通 FQJ-SS-03B

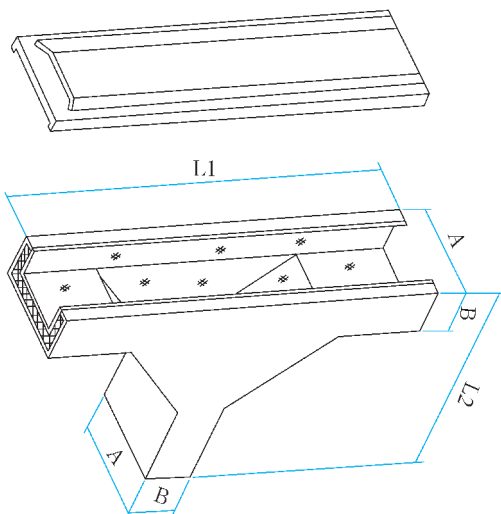

型 格 Model	外 型 尺 寸				内截面 宽 × 高	
	槽 宽	边 高	L1	L2		
FQJ-SS-03B-15a	150	100	700	400	100	60
FQJ-SS-03B-20a	200	100	700	400	150	60
FQJ-SS-03B-30a	300	100	700	400	250	60
FQJ-SS-03B-40a	400	100	700	400	350	60
FQJ-SS-03B-20b	200	150	750	450	150	110
FQJ-SS-03B-30b	300	150	750	450	250	110
FQJ-SS-03B-40b	400	150	750	450	350	110
FQJ-SS-03B-50b	500	150	750	450	450	110
FQJ-SS-03B-30c	300	200	800	500	250	160
FQJ-SS-03B-40c	400	200	800	500	350	160
FQJ-SS-03B-50c	500	200	800	500	450	160
FQJ-SS-03B-60c	600	200	800	500	550	160
FQJ-SS-03B-40d	400	250	850	550	350	210
FQJ-SS-03B-50d	500	250	850	550	450	210
FQJ-SS-03B-60d	600	250	850	550	550	210
FQJ-SS-03B-80d	800	250	850	550	750	210
FQJ-SS-03B-50e	500	300	900	600	450	260
FQJ-SS-03B-60e	600	300	900	600	550	260




下垂直三通 FQJ-XS-03C

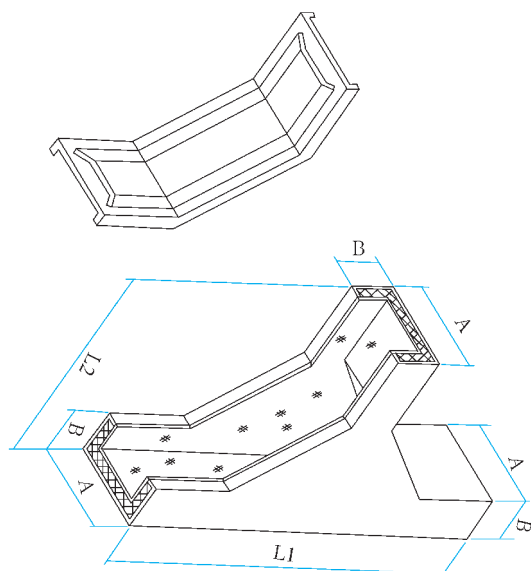


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XS-03C-15a	150	100	700	400	100	60
FQJ-XS-03C-20a	200	100	700	400	150	60
FQJ-XS-03C-30a	300	100	700	400	250	60
FQJ-XS-03C-40a	400	100	700	400	350	60
FQJ-XS-03C-20b	200	150	750	450	150	110
FQJ-XS-03C-30b	300	150	750	450	250	110
FQJ-XS-03C-40b	400	150	750	450	350	110
FQJ-XS-03C-50b	500	150	750	450	450	110
FQJ-XS-03C-30c	300	200	800	500	250	160
FQJ-XS-03C-40c	400	200	800	500	350	160
FQJ-XS-03C-50c	500	200	800	500	450	160
FQJ-XS-03C-60c	600	200	800	500	550	160
FQJ-XS-03C-40d	400	250	850	550	350	210
FQJ-XS-03C-50d	500	250	850	550	450	210
FQJ-XS-03C-60d	600	250	850	550	550	210
FQJ-XS-03C-80d	800	250	850	550	750	210
FQJ-XS-03C-50e	500	300	900	600	450	260
FQJ-XS-03C-60e	600	300	900	600	550	260

上边垂直三通 FQJ-SS-03D

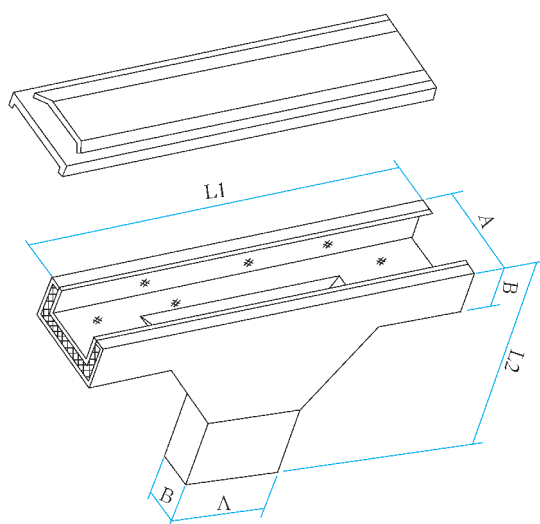


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-SS-03D-15a	150	100	750	400	100	60
FQJ-SS-03D-20a	200	100	800	400	150	60
FQJ-SS-03D-30a	300	100	900	400	250	60
FQJ-SS-03D-40a	400	100	1000	400	350	60
FQJ-SS-03D-20b	200	150	800	450	150	110
FQJ-SS-03D-30b	300	150	900	450	250	110
FQJ-SS-03D-40b	400	150	1000	450	350	110
FQJ-SS-03D-50b	500	150	1100	450	450	110
FQJ-SS-03D-30c	300	200	900	500	250	160
FQJ-SS-03D-40c	400	200	1000	500	350	160
FQJ-SS-03D-50c	500	200	1100	500	450	160
FQJ-SS-03D-60c	600	200	1200	500	550	160
FQJ-SS-03D-40d	400	250	1000	550	350	210
FQJ-SS-03D-50d	500	250	1100	550	450	210
FQJ-SS-03D-60d	600	250	1200	550	550	210
FQJ-SS-03D-80d	800	250	1400	550	750	210
FQJ-SS-03D-50e	500	300	1100	600	450	260
FQJ-SS-03D-60e	600	300	1200	600	550	260

上边垂直三通 FQJ-XS-03D

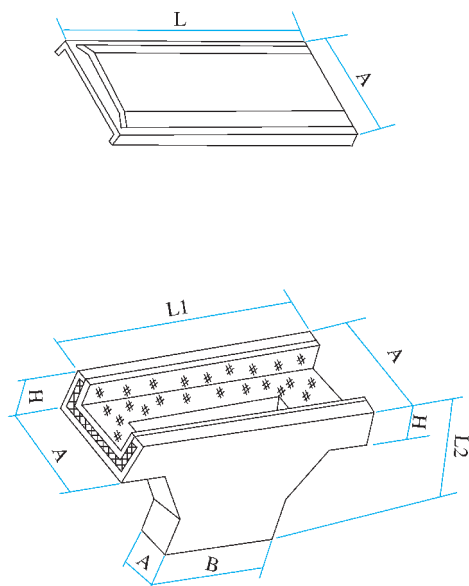

型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XS-03D-15a	150	100	750	400	100	60
FQJ-XS-03D-20a	200	100	800	400	150	60
FQJ-XS-03D-30a	300	100	900	400	250	60
FQJ-XS-03D-40a	400	100	1000	400	350	60
FQJ-XS-03D-20b	200	150	800	450	150	110
FQJ-XS-03D-30b	300	150	900	450	250	110
FQJ-XS-03D-40b	400	150	1000	450	350	110
FQJ-XS-03D-50b	500	150	1100	450	450	110
FQJ-XS-03D-30c	300	200	900	500	250	160
FQJ-XS-03D-40c	400	200	1000	500	350	160
FQJ-XS-03D-50c	500	200	1100	500	450	160
FQJ-XS-03D-60c	600	200	1200	500	550	160
FQJ-XS-03D-40d	400	250	1000	550	350	210
FQJ-XS-03D-50d	500	250	1100	550	450	210
FQJ-XS-03D-60d	600	250	1200	550	550	210
FQJ-XS-03D-80d	800	250	1400	550	750	210
FQJ-XS-03D-50e	500	300	1100	600	450	260
FQJ-XS-03D-60e	600	300	1200	600	550	260


下边垂直三通 FQJ-XS-03E

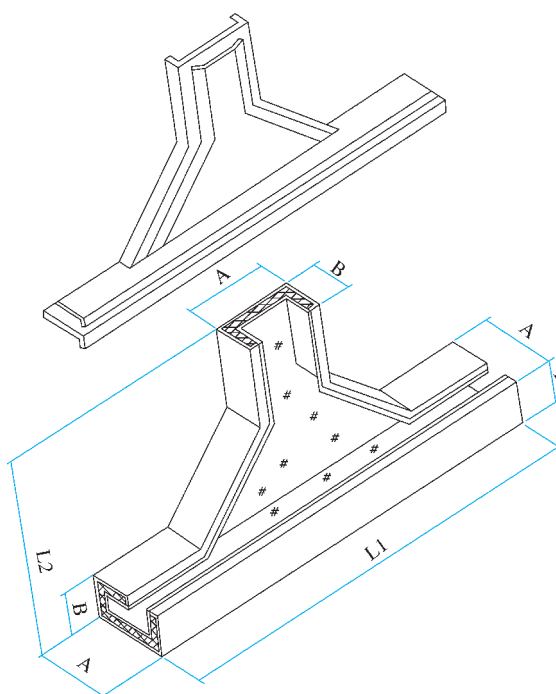

型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XS-03E-15a	150	100	750	400	100	60
FQJ-XS-03E-20a	200	100	800	400	150	60
FQJ-XS-03E-30a	300	100	900	400	250	60
FQJ-XS-03E-40a	400	100	1000	400	350	60
FQJ-XS-03E-20b	200	150	800	450	150	110
FQJ-XS-03E-30b	300	150	900	450	250	110
FQJ-XS-03E-40b	400	150	1000	450	350	110
FQJ-XS-03E-50b	500	150	1100	450	450	110
FQJ-XS-03E-30c	300	200	900	500	250	160
FQJ-XS-03E-40c	400	200	1000	500	350	160
FQJ-XS-03E-50c	500	200	1100	500	450	160
FQJ-XS-03E-60c	600	200	1200	500	550	160
FQJ-XS-03E-40d	400	250	1000	550	350	210
FQJ-XS-03E-50d	500	250	1100	550	450	210
FQJ-XS-03E-60d	600	250	1200	550	550	210
FQJ-XS-03E-80d	800	250	1400	550	750	210
FQJ-XS-03E-50e	500	300	1100	600	450	260
FQJ-XS-03E-60e	600	300	1200	600	550	260




上角垂直三通 FQJ-SS-03F

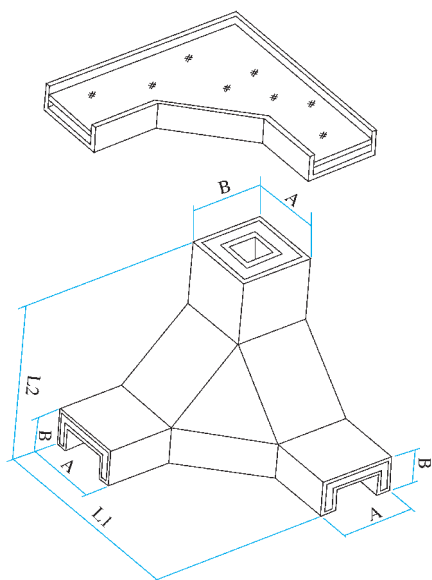


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-SS-03F-15a	150	100	450	400	100	60
FQJ-SS-03F-20a	200	100	500	400	150	60
FQJ-SS-03F-30a	300	100	600	400	250	60
FQJ-SS-03F-40a	400	100	700	400	350	60
FQJ-SS-03F-20b	200	150	500	450	150	110
FQJ-SS-03F-30b	300	150	600	450	250	110
FQJ-SS-03F-40b	400	150	700	450	350	110
FQJ-SS-03F-50b	500	150	800	450	450	110
FQJ-SS-03F-30c	300	200	600	500	250	160
FQJ-SS-03F-40c	400	200	700	500	350	160
FQJ-SS-03F-50c	500	200	800	500	450	160
FQJ-SS-03F-60c	600	200	900	500	550	160
FQJ-SS-03F-40d	400	250	700	550	350	210
FQJ-SS-03F-50d	500	250	800	550	450	210
FQJ-SS-03F-60d	600	250	900	550	550	210
FQJ-SS-03F-80d	800	250	1100	550	750	210
FQJ-SS-03F-50e	500	300	800	600	450	260
FQJ-SS-03F-60e	600	300	900	600	550	260

下角垂直三通 FQJ-XS-03G

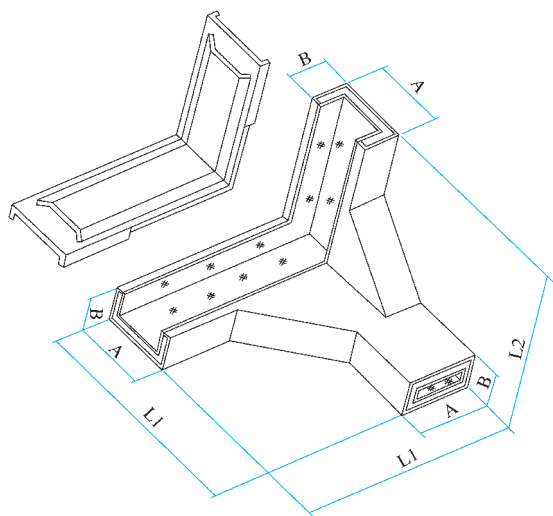


型 格 Model	外 型 尺 寸				内截面 宽×高	
	槽 宽	边 高	L1	L2		
FQJ-XS-03G-15a	150	100	450	400	100	60
FQJ-XS-03G-20a	200	100	500	400	150	60
FQJ-XS-03G-30a	300	100	600	400	250	60
FQJ-XS-03G-40a	400	100	700	400	350	60
FQJ-XS-03G-20b	200	150	500	450	150	110
FQJ-XS-03G-30b	300	150	600	450	250	110
FQJ-XS-03G-40b	400	150	700	450	350	110
FQJ-XS-03G-50b	500	150	800	450	450	110
FQJ-XS-03G-30c	300	200	600	500	250	160
FQJ-XS-03G-40c	400	200	700	500	350	160
FQJ-XS-03G-50c	500	200	800	500	450	160
FQJ-XS-03G-60c	600	200	900	500	550	160
FQJ-XS-03G-40d	400	250	700	550	350	210
FQJ-XS-03G-50d	500	250	800	550	450	210
FQJ-XS-03G-60d	600	250	900	550	550	210
FQJ-XS-03G-80d	800	250	1100	550	750	210
FQJ-XS-03G-50e	500	300	800	600	450	260
FQJ-XS-03G-60e	600	300	900	600	550	260

水平四通 FQJ-PS-04A

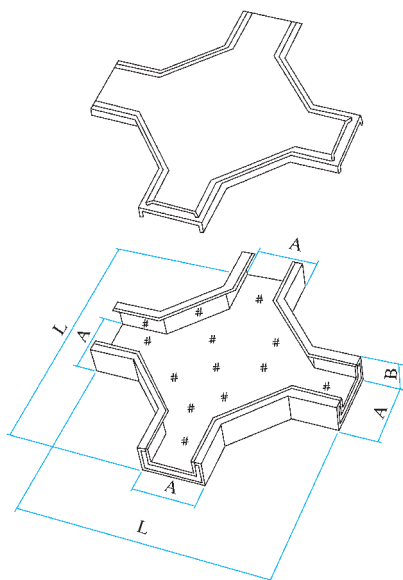

型 格 Model	外 型 尺 寸			内截面 宽×高	
	槽 宽	边 高	L1		
FQJ-PS-04A-15a	150	100	750	100	60
FQJ-PS-04A-20a	200	100	800	150	60
FQJ-PS-04A-30a	300	100	900	250	60
FQJ-PS-04A-40a	400	100	1000	350	60
FQJ-PS-04A-20b	200	150	800	150	110
FQJ-PS-04A-30b	300	150	900	250	110
FQJ-PS-04A-40b	400	150	1000	350	110
FQJ-PS-04A-50b	500	150	1100	450	110
FQJ-PS-04A-30c	300	200	900	250	160
FQJ-PS-04A-40c	400	200	1000	350	160
FQJ-PS-04A-50c	500	200	1100	450	160
FQJ-PS-04A-60c	600	200	1200	550	160
FQJ-PS-04A-40d	400	250	1000	350	210
FQJ-PS-04A-50d	500	250	1100	450	210
FQJ-PS-04A-60d	600	250	1200	550	210
FQJ-PS-04A-80d	800	250	1400	750	210
FQJ-PS-04A-50e	500	300	1100	450	260
FQJ-PS-04A-60e	600	300	1200	550	260

上垂直四通 FQJ-SS-04B

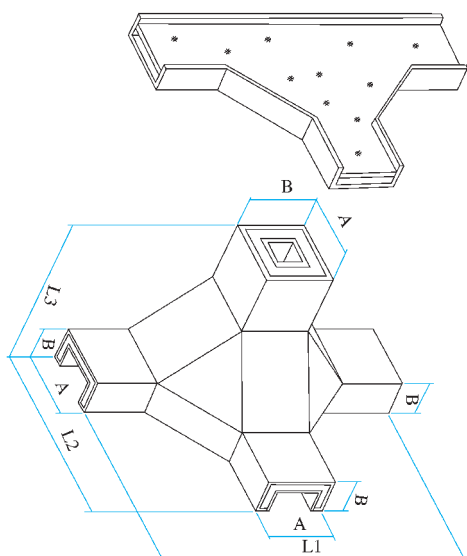

型 格 Model	外 型 尺 寸					内截面 宽×高	
	槽 宽	边 高	L1	L2	L3		
FQJ-SS-04B-15a	150	100	750	325	250	100	60
FQJ-SS-04B-20a	200	100	800	400	300	150	60
FQJ-SS-04B-30a	300	100	900	550	400	250	60
FQJ-SS-04B-40a	400	100	1000	700	500	350	60
FQJ-SS-04B-20b	200	150	800	400	300	150	110
FQJ-SS-04B-30b	300	150	900	550	400	250	110
FQJ-SS-04B-40b	400	150	1000	700	500	350	110
FQJ-SS-04B-50b	500	150	1100	800	500	450	110
FQJ-SS-04B-30c	300	200	900	550	400	250	160
FQJ-SS-04B-40c	400	200	1000	700	500	350	160
FQJ-SS-04B-50c	500	200	1100	800	500	450	160
FQJ-SS-04B-60c	600	200	1200	900	500	550	160
FQJ-SS-04B-40d	400	250	1000	700	500	350	210
FQJ-SS-04B-50d	500	250	1100	800	500	450	210
FQJ-SS-04B-60d	600	250	1200	900	500	550	210
FQJ-SS-04B-80d	800	250	1400	1100	500	750	210
FQJ-SS-04B-50e	500	300	1100	800	500	450	260
FQJ-SS-04B-60e	600	300	1200	900	500	550	260

固定件 配件

这一部分主要包括各种电缆、电缆卡子和连接、紧固螺栓等一些电缆桥架安装中所需的通用附件，供用户在订货，安装时选用。

附件部分中所有连接、紧固螺栓、电缆卡子全部镀锌，其它槽板，花盘角铁表面处理分有静电喷塑、镀锌、喷漆三种。


膨胀螺栓的安装见下图：

Fixed piece Fittings

The part mainly includes common accessories, such as all kinds of cables, Piping cable clips and connecting and fastening bolts needed in the cable installation.

All connecting, fastening bolts and cable clips in the accessories are zinc-plated. The surface dealing of the other channel board and faceplate angle iron is dealt with electrostatic plastics spraying, zinc-plating and paint spraying.

The installlation of expansion bolts can be seen as the fpolloing picture.

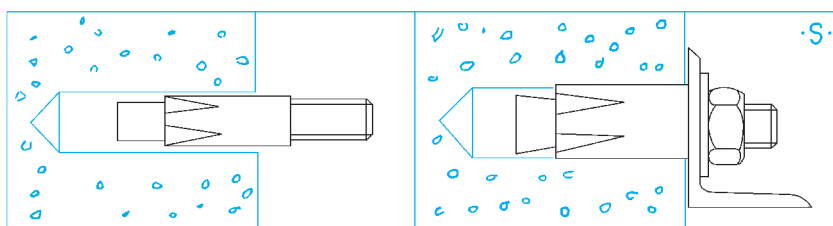


- 1.按膨胀螺栓规格选用Z1C2-22型电锥（冲击电钻）钻孔，然后插入膨胀螺栓。
- 2.装上工件，旋紧螺母。


铝合金桥架所有紧固螺栓采用不锈钢。

- 1.First, use the Z1C2-22 type of electric drill to drill holes according to the specification of expansion bolts, and then insert expansion bolts.
- 2.Fix workpiece and then fasten the nuts.


All fastening bolts of the aluminum cables are all stainless steel.

IS-01方颈连接螺栓
Aquare neck coonecting boat



型 号 Model	M	备 注 Remark
IS-01-6	M6	L=12
IS-01-8	M8	L=16、L=20、L=25
IS-01-10	M10	L=20

IS-02半圆连接螺栓
Semicircle



型 号 Model	M × L	备 注 Remark
IS-02-5	M5 × 22	L=12
IS-02-6	M6 × 22	
IS-02-8	M8 × 22	

IS-03六角连接螺栓
Hexgon connecting bolt



型 号 Model	M × L	备 注 Remark
IS-03-8	M8 × 22	
IS-03-10	M10 × 25	
IS-03-12	M12 × 30	

IS-04T型螺栓
T bolt



型 号 Model	M × L	备 注 Remark
IS-04-8	M8 × 30	
IS-04-10	M10 × 35	

IS-05T型螺栓
T bolt


型 号 Model	M × L	备 注 Remark
IS-05-8	M8	
IS-05-10	M10	


IS-06膨胀螺栓
Expanding bolt


型 号 Model	M × L	允许拉力 Permitted pulliyforce
IS-06-6	M6 × 65、80	200号混凝土 doncrete 350 500 720 100
IS-06-8	M8 × 80、100	
IS-06-10	M10 × 95、110	
IS-06-10	M10 × 125	
IS-06-12	M12 × 110	
IS-06-12	M12 × 130	
IS-06-12	M12 × 150	


FJ-01吊板
Hoisting board

FJ-02吊夹
Hoisting tougs

FJ-03吊框
Hoisting frame

 用于50 × 50、100 × 50配线槽吊装
Fits to 50 × 50、100 × 50 weirfittings trough

FJ-07^a_b槽板
Trough board

 用于电缆卡座和仪表基座
Fits to the fundation of cable and in strument


型 号 Model	L(mm)	备 注 Remark
FJ-07 ^a _b -200	200	
FJ-07 ^a _b -400	400	
FJ-07 ^a _b -600	600	
FJ-07 ^a _b -800	800	
FJ-07 ^a _b -1000	1000	

FJ-08异型槽板
Speciald-shaped trough board

 用于电卡座和仪表基座
Fits to the fundation of cable and in strument

型 号 Model	L(mm)	备 注 Remark
FJ-08-200	200	
FJ-08-400	600	
FJ-08-600	1000	
FJ-08-800	1500	
FJ-08-1000	2000	



FJ-09花盘角铁
Faceplate angle iron




用于电缆卡座和仪表基座

Fits to the fundation of cable and in strument

型 号 Model	L(mm)	备 注 Remark
FJ-09-200	200	
FJ-09-600	600	
FJ-09-1000	1000	
FJ-09-1500	1500	
FJ-09-2000	2000	

K-01单面电缆卡
Single face cable tong




按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets

型 号 Model	D	配用电缆 Concerted Cable
K-01-13	13	φ10-φ13
K-01-17	17	φ14-φ17
K-01-21	21	φ14-φ17
K-01-25	25	φ26-φ29
K-01-29	29	φ26-φ29

K-02双边单根电缆卡
Doude-side single prece cable tong




按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets

型 号 Model	D	配用电缆 Concerted Cable
K-02-13	13	φ10-φ13
K-02-17	17	φ14-φ17
K-02-21	21	φ14-φ17
K-02-25	25	φ26-φ29
K-02-29	29	φ26-φ29

K-03双根电缆卡
Do ude piece cable tong




按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets


型 号 Model	D	配用电缆 Concerted Cable
K-03-13	13	φ10-φ13
K-03-17	17	φ14-φ17
K-03-21	21	φ14-φ17
K-03-25	25	φ26-φ29
K-03-29	29	φ26-φ29

K-04管缆卡
Qipe cable tong




型 号 Model	φ	备 注 Remark
K-04-08	8	在少量管缆数 设时作定位用 It fits to fix position in the layment of a fow pice cable
K-04-10	10	
K-04-12	12	
K-04-14	14	
K-04-16	16	
K-04-18	18	
K-04-20	20	
K-04-22	22	

K-05管缆卡
Mutipeces cable tong




型 号 Model	b × h	备 注 Remark
K-05-50	50 × 50	用于电缆直径小数 量多的固定
K-05-47	97 × 47	Used in thfuang of small diameter qipe cable
K-05-87	97 × 87	

K-06电缆卡带
Cable tong belt



型 号 Model	规 格 Standard	备 注 Remark
K-06-120	120 × 9	
K-06-160	160 × 9	
K-06-260	260 × 9	

K-07电缆卡子
Cable tong




配FJ-07a 槽板

Cooperating with FJ-07a trough board

型 号 Model	规 格 Standard	配电缆 Distribution Cable	备 注 Remark
K-07-30	30 × 50	φ15-30	
K-07-50	50 × 75	φ30-50	
K-07-75	75 × 100	φ50-75	


K-08电缆卡子
Cable tong



配FJ-08 异径槽板FJ-09 faceoblte
Cooperating with angleiron
FJ-08 diameter varied trough board
配FJ-09 花盘角铁
cooperating with

型 号 Model	规 格 Standard	配电缆 Distribution Cable	备 注 Remark
K-08-30	30 × 50	φ15-30	
K-08-50	50 × 75	φ30-50	
K-08-75	75 × 100	φ50-75	


紧固螺栓（一） BB1 Fastening Bolts

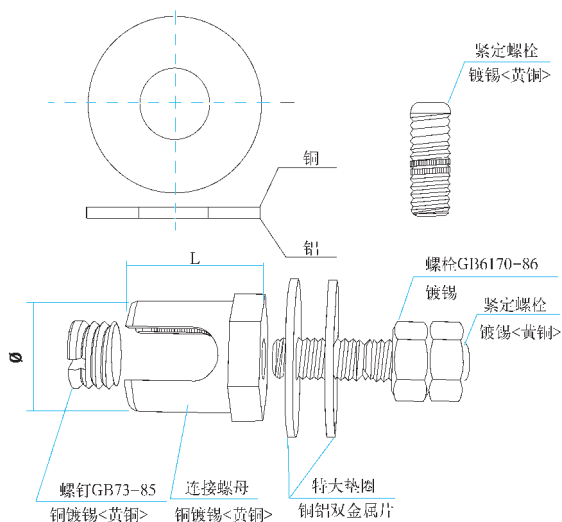

注：本件作为桥架安装专设整体接地线之固定导体用。
订货时需另外订价。







序 号	编 码	裸铜缆截面	螺 母	锁紧垫圈	特大垫圈	Ø	L	连接螺母
1	BB1-1	150 ²	M6	6	6/35	30	40	BB-16-6CN
2	BB1-2	70 ²			6/27	23.8	30	BB-12-6CN
3	BB1-3	50 ²	M6	6	6/24	20.8	26	BB-10-6CN
4	BB1-4	6 ² ~16 ²				16.8	19	BB-6-6CN

U型立柱 FJ-10 U-upright FJ-10

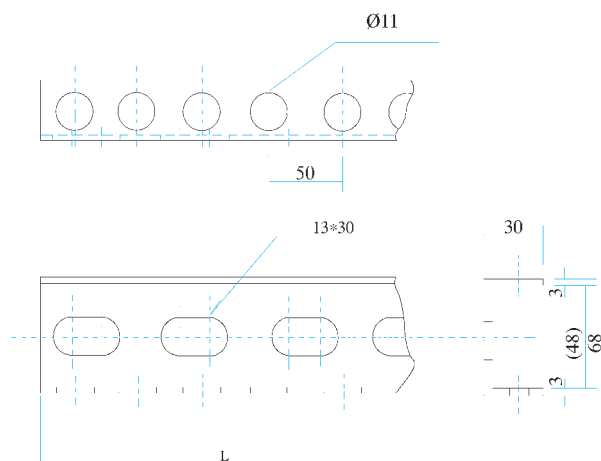



电缆钢制竖井 DS-01

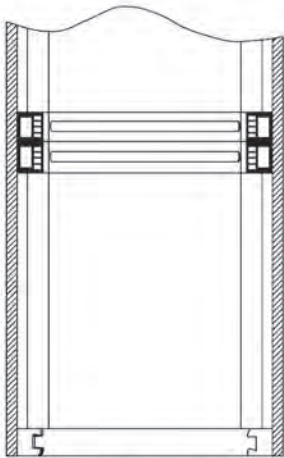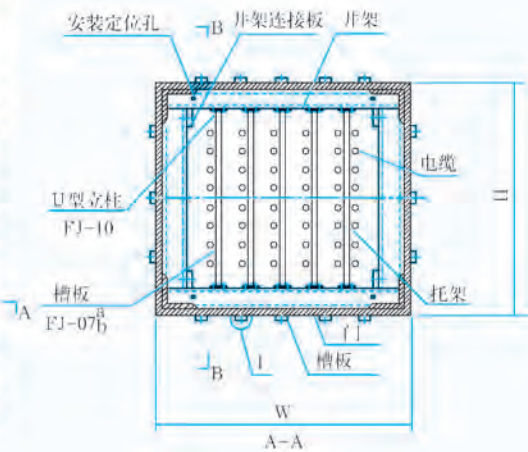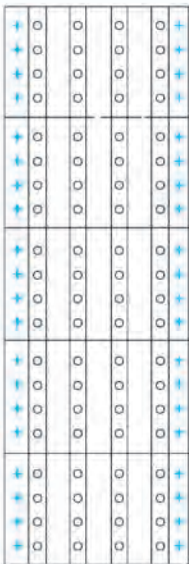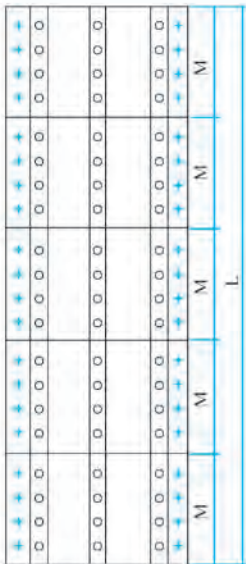

注：a型为带防护门结构
b型为不带防护门结构

序 号	规 格 W * H	M	L	重 量 kg
1	500 * 500	900	4500	787
2	800 * 500	900	4500	984
3	1000 * 800	900	4500	1230
4	1200 * 1000	900	4500	1758

支 架

XQJ-H.TB

支架是支撑电缆桥架和电缆的主要部件，它由立柱、立柱底座、托臂等组成。我厂生产的支架是根据日本、西德的同类产品设计而成；它具有结构简单、重量轻、成本低、强度大、造型美等优点，可满足不同环境条件（工艺管道架上、楼板上、墙壁上、电缆沟内）安装成不同形式（悬吊式、直立式、侧壁式、单边、双边和多层等）的需要。

电缆桥架如需多层重载荷吊装时，要尽量采取双边敷设、避免偏载过大。

支架部分的连接螺栓配套供货、安装螺栓（膨胀螺栓）根据需要按型号订货。

支架部分其表面处理有电镀锌、热镀锌、喷漆、喷塑四种。

用户如需其它品种规格的支架、欢迎来图、来函或面洽订货。

Support XQJ-H.TB

The support, which is made up of stand, stand base and bracket arm, is the main part to support the cables. The support produced in our factory is designed to the same kind of product in both Japan and Germany. It has such advantages as simple structure, Light weight, Low cost, big strength and wonderful modelling. It can meet different environmental conditions (such as, on the technological piping frame, on the floors, on the walls and cable ditches) to be installed in different forms (such as, hanging style, standing style, side style, single, double and multilateral styles).


When hoisted with multilateral heavy Load, the cables should be Laid bilaterally to avoid being over Loaded.

Connecting bolts of the support can be provided together. If necessary, installation bolts can be ordered according to the type. The surface dealing of the support has 4 kinds of ways.

electroplating, zinc-plating, paint spraying and plastics spraying. If you need other varieflies of support, you can order by sending your pictures, writing to us and coming to have a face-to-face talk with us.




XQJ-H-01A工字钢立柱
I-Steel Post




序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01A-3	300	4.07	II型每件加重1.61kg additional 1.61kg per piece for Type II
2	H-01A-5	500	6.78	
3	H-01A-8	800	10.85	
4	H-01A-10	1000	13.53	
5	H-01A-15	1500	20.35	
6	H-01A-20	2000	27.06	II型每件加重4.8kg additional 4.8kg per piece for Type II
7	H-01A-25	2500	33.88	
8	H-01A-30	3000	40.7	

XQJ-H-01B丁字钢立柱
丁-Steel Post Type Post




序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01B-3	300	3.24	II型每件加重1.61kg additional 1.61kg per piece for Type II
2	H-01B-5	500	5.42	
3	H-01B-8	800	8.65	
4	H-01B-10	1000	10.81	
5	H-01B-15	1500	16.22	
6	H-01B-20	2000	21.61	

XQJ-H-01C槽钢立柱
Trough-Steel Post



序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01C-3	300	3.63	II型每件加重1.61kg additional 1.61kg per piece for Type II
2	H-01C-5	500	6.05	
3	H-01C-8	800	9.68	
4	H-01C-10	1000	12.1	
5	H-01C-15	1500	18.15	
6	H-01C-20	2000	24.2	

XQJ-H-01D角钢立柱
Angle-Steel Post




序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01D-3	300	1.62	II型每件加重1.61kg additional 1.61kg per piece for Type II
2	H-01D-5	500	2.71	
3	H-01D-8	800	4.33	
4	H-01D-10	1000	5.40	
5	H-01D-15	1500	8.11	
6	H-01D-20	2000	10.80	

支

架


Supports XQJ-H.TB

XQJ-H-02A工字钢立柱底座
I-Steel Post Base

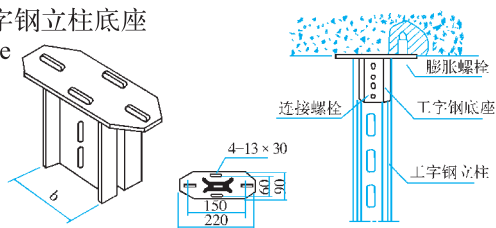


型 号 Type	b (mm)	kg / 件 Unit price	备 注 Remark
H-02A-8#	70	4.2	配8 #工字钢fitting with8 # I-Steel
H-02A-10#	90	4.5	配10 #工字钢fitting with10 # I-Steel

XQJ-H-02C槽钢立柱底座
Trough-Steel Post Base

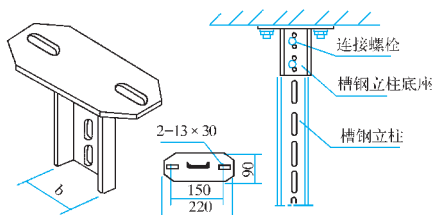


型 号 Type	b (mm)	kg / 件 Unit price	备 注 Remark
H-02C-8#	70	2.5	配8 #-01C、H-01立柱fitting with8 #-upright post
H-02C-10#	90	2.8	配10 #-01C、H-01立柱fitting with10 #-upright post

XQJ-H-02D角钢立柱底座
Angle-Steel Post Base

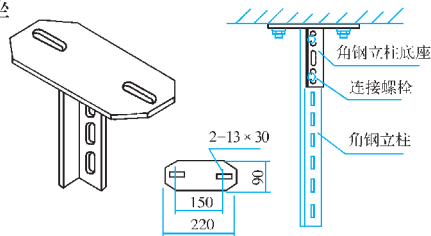


H-02D角钢立柱底座 每件单重2.9kg
H-02D angle iron post foundation is linked Weight 2.9kg

XQJ-H-03A工字钢倾斜底座
I-Steel Tilt

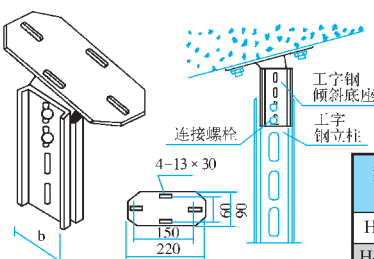


型 号 Model	b (mm)	kg / 件 Unit price	备 注 Remark
H-03A-8#	70	6.1	配8 #工字钢fitting with8 #-Steel post
H-03A-10#	90	6.3	配10 #工字钢fitting with10 #-Steel post

XQJ-H-03C槽钢倾斜底座
Trough-Steel Tilt Base

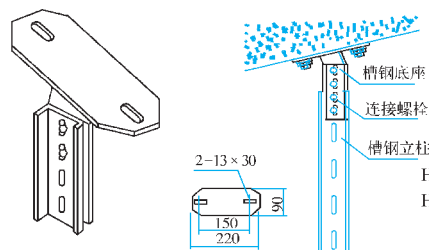

H-03C型槽钢倾斜底座 每件单价6.2kg。
H-03C channel iron indined foundation can be linked weight 6.2kg.


XQJ-H-03D角钢倾斜底座
Angle-Steel Tilt Base

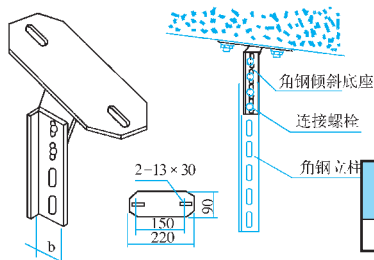

型 号 Model	b (mm)	kg / 件 Unit price	备 注 Remark
H-01D	40	5.4	H-01D、H-01B立柱fitting H-01D、H-01B




XQJ-H-01E异型立柱
Dianeler- type Post

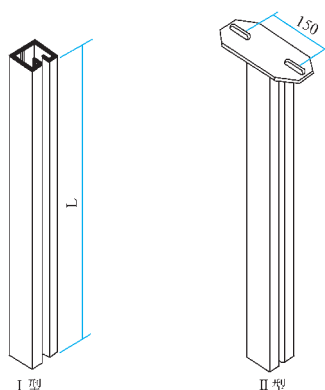


序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01E-3	300	2.11	II 型每件加重1.61kg additional 1.61kg per piece for Type II
2	H-01E-5	500	3.53	
3	H-01E-8	800	5.67	
4	H-01E-10	1000	7.08	
5	H-01E-15	1500	10.62	
6	H-01E-20	2000	14.15	

XQJ-ZJ1型支架
XQJ-ZJ1 Frame




型 号 Model	b mm	a mm	c mm	重量kg Weight
ZJ1-2	250	250		4.05
ZJ1-3	350			4.59
ZJ1-4	450			4.93
ZJ1-5	550	7.89		
ZJ1-6	650	8.64		
ZJ1-10	1050	280	470	12.10
ZJ1-12	1250		570	13.60

XQJ-ZJ2型支架
XQJ-ZJ2 Frame



型号 Model	b (mm)	c (mm)	重量kg Weight
ZJ2-2	250		1.83
ZJ2-3	350		2.66
ZJ2-4	450		3.29
ZJ2-5	550		4.02
ZJ2-6	650		4.75
ZJ2-10	1050	470	7.72
ZJ2-12	1250	570	9.19

XQJ-ZJ3型支架
XQJ-ZJ3 Frame




型号 Model	b (mm)	a (mm)	c (mm)	e (mm)	重量kg Weight
ZJ3-1	150	270	90	40 x 4	2.61
ZJ3-2	250	370			3.1
ZJ3-3	350	470			4.4
ZJ3-4	450	570	110	50 x 5	4.9
ZJ3-5	550	670			5.5
ZJ3-6	650	770			6.1
ZJ3-10	1050	1170			8.1
ZJ3-12	1250	1370	120	63 x 6	12.4

支

架

Supports XQJ-H.TB

电缆桥架在电缆沟内安装 (一) Installation of Cable Tray Inside Cable Channel

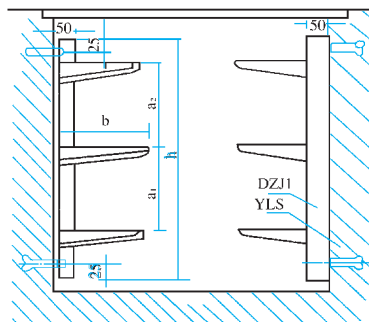


型 号 Model	名 称 Name
DZJ ₁	电缆支架 Cable shelf
YLS	预埋螺栓 Anchou bolt

电缆支架间距:
电力电缆: 1000mm
控制电缆: 800mm
n为悬臂个数

型号 Model	n个	a(mm)	b(mm)	h(mm)	单重 Weight(kg)
DZJ ₁ -22	2	a ₂ =240	210	390	3.82
-23			310		4.65
-24			410		8.08
-25			510		9.37
-26			610		10.65
DZJ ₁ -32	3	a ₁ =180 a ₂ =240	210	570	8.06
-33			310		10.01
-34			410		11.96
-35			510		13.96
-36			610		15.82
DZJ ₁ -42	4	a ₁ =180 a ₂ =240 × 2	210	810	11.02
-43			310		13.62
-44			410		16.22
-45			510		18.81
-46			610		21.36
DZJ ₁ -52	5	a ₁ =180 × 2 a ₂ =240 × 2	210	990	14.26
-53			310		16.95
-54			410		20.30
-55			510		23.44
-56			610		26.63

电缆支架在电缆隧道内安装 (一) Installation of Cable Inside Cable Channel




型 号 Model	名 称 Name
DZJ ₁	电缆支架 Cable shelf
PLS	膨胀螺栓 expansion bolt

电缆支架间距为:
电力电缆: 1000mm
控制电缆: 800mm
层间间距a可按用户要求供货。

型号 Model	n个	a(mm)	b(mm)	d(mm)	c(mm)	h(mm)	单重 Weight(kg)
DZJ ₁ -62	6	a ₁ =180 × 2 a ₂ =240 × 3	210	385	56 ($< 56 \times 5$)	1230	16.61
-63			310				20.50
-64			410				24.40
-65			510				28.29
-66			610				32.12
DZJ ₁ -72	7	a ₁ =180 × 2 a ₂ =240 × 4	210	625	63 ($< 63 \times 6$)	1470	22.67
-73			310				27.21
-74			410				31.76
-75			510				36.30
-76			610				40.77
DZJ ₁ -82	8	a ₁ =180 × 2 a ₂ =240 × 5	210	625	40 (< 6.3)	1710	26.14
-83			310				31.33
-84			410				36.52
-85			510				41.71
-86			610				46.82
DZJ ₁ -92	9	a ₁ =180 × 2 a ₂ =240 × 5	210	865	40 ($\square 6.3$)	1890	29.15
-93			310				34.99
-94			410				40.83
-95			510				46.67
-96			610				52.42

电缆支架在电缆沟内安装 (二) Installation of Cable Shelf Inside Cable Channel

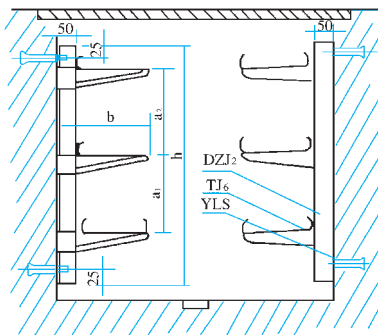


型 号 Model	名 称 Name
DZJ ₂	电缆支架 Cable shelf
YLS	预埋螺栓 Anchou bolt
TJ ₆	梯 架 Ladder frame

电缆支架间距为3000mm。
支架层间间距a可按用户要求供货。
n为悬臂个数

型号 Model	n个	a(mm)	b(mm)	h(mm)	单重 Weight(kg)
DZJ ₂ -22	2	a ₂ =280	210	430	5.72
-23			310		7.19
-24			410		8.42
-25			510		9.70
-26			610		10.98
DZJ ₂ -32	3	a ₁ =230 a ₂ =280	210	660	8.55
-33			310		10.49
-34			410		12.44
-35			510		14.44
-36			610		16.30
DZJ ₂ -42	4	a ₁ =230 a ₂ =280 × 2	210	940	11.73
-43			310		14.32
-44			410		16.92
-45			510		19.52
-46			610		22.07
DZJ ₂ -52	5	a ₁ =230 × 2 a ₂ =280 × 2	210	1170	15.22
-53			310		17.92
-54			410		21.26
-55			510		24.41
-56			610		27.60


电缆支架在电缆隧道内安装 (二) Installation of Cable Shelf Inside Cable Channel





型 号 Model	名 称 Name
DZJ ₁	电缆支架 Cable shelf
PL ₆	梯 架 Ladder frame
PLS	膨胀螺栓 expansion bolt

电缆支架间距为3000mm。
支架层间间距a可按用户要求供货。



型号 Model	n个	a(mm)	b(mm)	d(mm)	c(mm)	h(mm)	单重 Weight(kg)
DZJ ₁ -62	6	a ₁ =230 × 2 a ₂ =280 × 3	210	470	56 ($\square 56 \times 5$)	1450	17.80
-63			310				21.69
-64			410				25.59
-65			510				29.48
-66			610				33.31
DZJ ₁ -72	7	a ₁ =230 × 2 a ₂ =280 × 4	210	750	63 ($\square 63 \times 6$)	1730	24.63
-73			310				29.17
-74			410				33.72
-75			510				38.26
-76			610				42.72
DZJ ₁ -82	8	a ₁ =230 × 2 a ₂ =280 × 5	210	750	40 ($\square 6.3$)	2010	28.39
-83			310				33.58
-84			410				38.78
-85			510				43.97
-86			610				49.70
DZJ ₁ -92	9	a ₁ =230 × 2 a ₂ =280 × 5	210	750	40 ($\square 6.3$)	2240	31.78
-93			310				37.62
-94			410				43.46
-95			510				49.30
-96			610				55.04

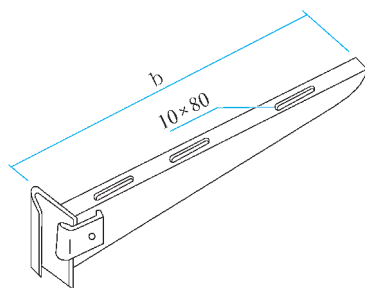



序号 No.	型号 Model	规格b Specification	重量kg/件 Weight kg/pc	备注 Remark
1	TB-01A-150	170	1.63	螺栓、压板配套供给, 按件计价10.73元 Remarks bolts and fastener savailable 10.73 Chinese yuan/pc
2	TB-01A-200	220	1.94	
3	TB-01A-300	320	2.59	
4	TB-01A-400	420	3.23	
5	TB-01A-500	520	3.88	
6	TB-01A-600	620	4.53	
7	TB-01A-800	820	5.83	





序号 No.	型号 Model	规格b Specification	重量kg/件 Weight kg/pc	备注 Remark
1	TB-01B-150	170	1.60	连接螺栓M12 Linked to bolt M12
2	TB-01B-200	220	1.87	
3	TB-01B-300	320	2.56	
4	TB-01B-400	420	3.21	
5	TB-01B-500	520	3.85	
6	TB-01B-600	620	4.51	
7	TB-01B-800	820	5.81	




序号 No.	型号 Model	规格b Specification	重量kg/件 Weight kg/pc	备注 Remark
1	TB-02-150	170	1.41	连接螺栓 IS-05 M12 x 35 Linked to bolts IS-05 M12 x 35
2	TB-02-200	220	1.74	
3	TB-02-300	320	2.38	
4	TB-02-400	420	3.03	
5	TB-02-500	520	3.67	
6	TB-02-600	620	4.31	
7	TB-02-800	820	5.62	




序号 No.	型号 Model	规格b Specification	重量kg/件 Weight kg/pc	备注 Remark
1	TB-03-100	120	1.01	连接螺栓 IS-03 M12 x 25 Linked to bolts IS-03 M12 x 25
2	TB-03-150	170	1.34	
3	TB-03-200	220	1.66	
4	TB-03-300	320	2.31	
5	TB-03-400	420	2.96	
6	TB-03-500	520	3.61	
7	TB-03-600	620	4.25	
8	TB-03-800	820	5.56	



序号 No.	型号 Model	规格b Specification	重量kg/件 Weight kg/pc	备注 Remark
1	TB-04-150	170	0.97	连接螺栓 IS-06/12 M12 x 110 Fix to bolt IS-06/12 M12 x 110
2	TB-04-200	220	1.12	
3	TB-04-300	320	1.43	
4	TB-04-400	420	1.74	
5	TB-04-500	520	2.03	
6	TB-04-600	620	3.16	
7	TB-04-800	820	3.97	




悬吊安装 Hoisting-Type Installation of Tray




型 号 Model	名 称 Name	页 次 Page
IS	膨胀螺栓 Expansion Bolt	
TPC-08	护罩 Cover	
C-01A	桥架 Cable Tray	
TB-05A	吊杆 Sling Stay	
TB-05B	横梁 Beam	

TB-05B型横梁 TB-05B crossbeam




型 号 Model	b(mm)	a(mm)	重量kg/件 Wt kg/pc
TB-05B-7	700	L63 × 6	4.00
-10	1000		5.72
-16	1600	L80 × 8	13.27
-21	2100		17.42

TB-05A型吊杆 TB-05A Hoisting pole




型 号 Model	H	重量kg/件 Wt kg/pc
TB-05A-5	500	2.32
-10	1000	2.75
-16	1500	3.17
-21	2000	3.60

XQJ-ZYS型引上装置 Hold Up Guides

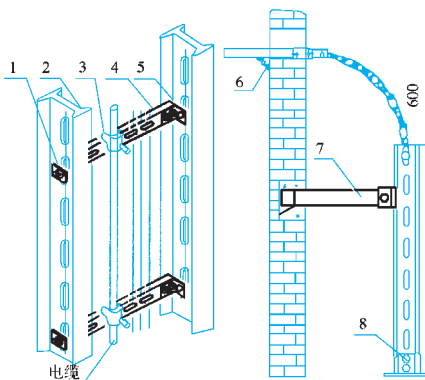

件号	名 称	型 号	备注
1	垫片	XQJ-DP50	
2	工字钢	XQJ-H-01A	
3	电缆卡子	XQJ-K-08A	
4	横梁	XQJ-HL	
5	固定板	XQJ-GDB3	
6	支架	XQJ-ZJ2	
7	钳形夹板	XQJ-QJB	
8	工字钢立柱底座	XQJ-H-02A	


QJB型钳形夹板 QJB pincerlike tong board



L长度根据需要供货


型 号 Model	a	L	工字 钢#	重量 kg	重量 kg
QJB5-5	55	500	8#	3.09	M10 × 24
QJB5-10	55	1000	10#	5.28	M10 × 24
QJB6-5	68	500	8#	3.3	M10 × 40
QJB6-10	68	1000	10#	5.72	M10 × 40

DP型垫片 DP spacer




单重: 0.16kg
piece weight

GDB3型固定板 GDB3 fixing board



单重: 0.15kg
piece weight

HL横梁 HL cuoss beam




型 号 Type	HL-5	HL-9	HL-12	HL-15
L	500	900	1200	1500
单重kg Weight	2.60	5.10	6.30	7.20




电缆导板

Cable Slide Model




型号 Model	b(mm)	单价元/件 unitprice(\$)
TPC-17-10	90	4.75
TPC-17-20	190	9.63
TPC-17-30	290	11.35
TPC-17-40	390	14.38
TPC-17-50	490	15.58
TPC-17-60	530	20.43

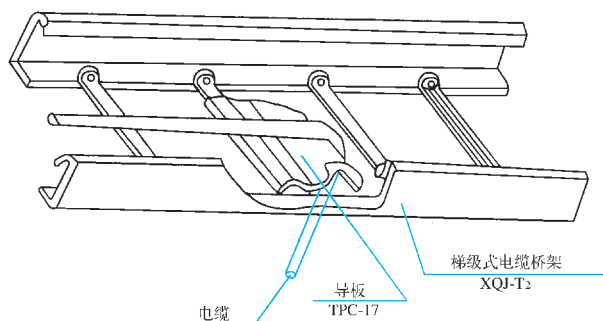


电梯从梯架上引时，梯级要损伤电缆外皮，安装此板后，可达到保护电缆之目的。
The cable slide can protect from being damaged

引下装置

Down-Leading Device

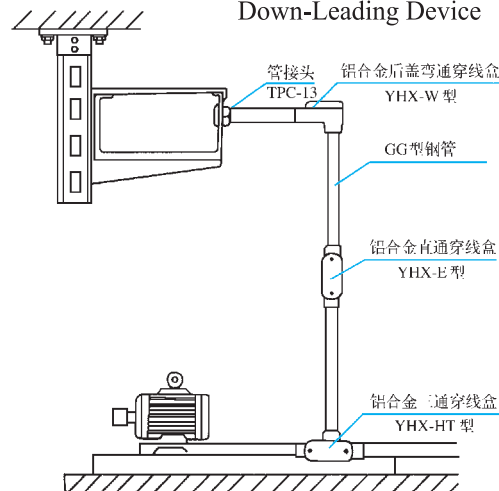

XQJ MY-1型(A)




GG-60型钢管

Steel Pipe Model GG-60

型号 Model	mm	单价kg Weight (kg)
GG-60	60	24.51

引下装置

Down-Leading Device

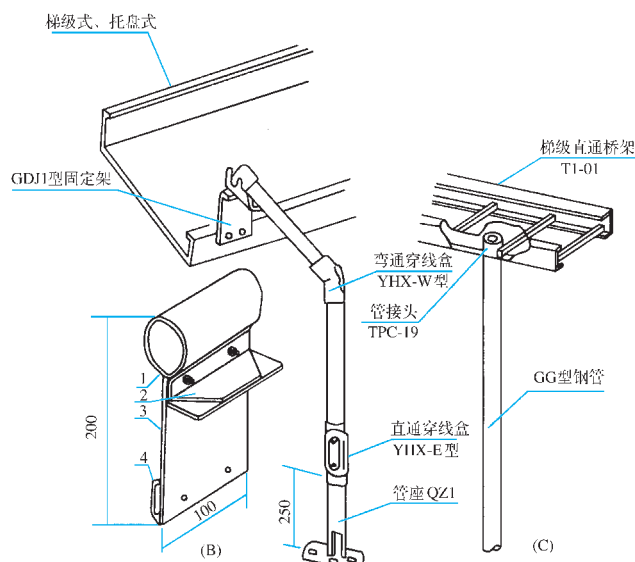

- 1-管接头
coupling
- 3-支撑板
supporter

- GDJ1型固定架
Fastener Model GDJ1
- 2-转动角铁
running angel-bar
- 4-槽型压板XQJ-MY- II 型
channel type platen Model XQJ-MY- II

注：引线管安装可采用铝合金穿线盒，作连接钢管，穿线盒有直通、三通、左弯、右弯、后盖弯四通等。结构形式，使用穿线盒，安装方便、外形美观、是必不可少的配件，详细安装、见本厂的穿线盒说明书。

Note: Alluminium alloy threading box, functioning as connection steel pipe, may be used in the installation of conduits. The threading box, an integral spare part, falls into following categories: straight, T-joint, left joint, right joint back joint and cross. The used of threading box makes-easy installation, beautiful appearance, ect. please refer to the Instruction on Threading Box for its installation.

建筑抗震设计规范 *Building seismic design code*



■ 中国国家标准 GB50011-2010

第 1.0.2 条抗震设防烈度为 6 度及以上地区的建筑,必须进行抗震设计(强制性条文)。

第 3.7.1 条非结构构件,包括建筑非结构构件和建筑附属机电设备,自身及其与结构主体的连接,应进行抗震设计(强制性条文)。

第 13.1.1 条(注 2)建筑附属机电设备指为现代建筑使用功能服务的附属机械、电器构件、部件和系统;主要包括电梯、照明系统和应急电源、通信设备、管道系统、采暖和空气调节系统、烟火监测和消防系统、公用天线等。


抗震支撑系统 *An earthquake support system*

地震过程中会向建筑物及其内部设施施加地震力,这些地震力会沿水平方向作用于建筑物本身,同时还会作用于管道系统、电缆槽、风管及其他内部建筑系统。通常为管道、电缆槽和其他设施所设计的支撑物都只是针对重力作用或垂


直方向的荷载,而未考虑地震所产生的水平荷载。可抗震固定装置,即支架、支撑物,可抵御水平力并使建筑机电设施保持稳定与完好。抗震支撑的主要目的就是要把地震所造成的生命损失减少到最低程度。

■ 系统原理

单管抗震支撑系统原理示意图

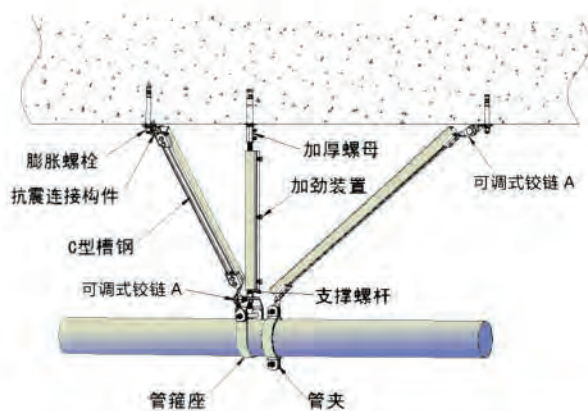

门型吊架抗震支撑系统原理示意图

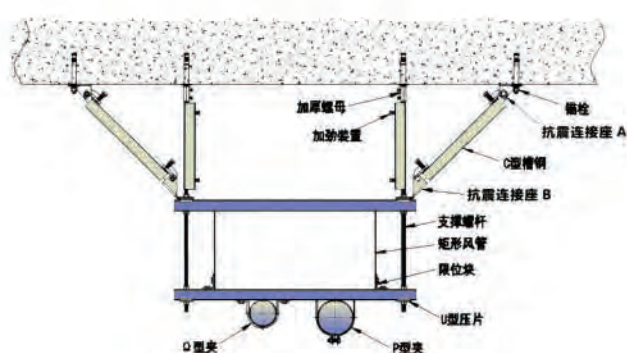




抗震支撑系统 *An earthquake support system*


■ 支撑类型

■ 抗震支吊架按用途分为以下四类：


管道支撑
(给排水、消防管道)

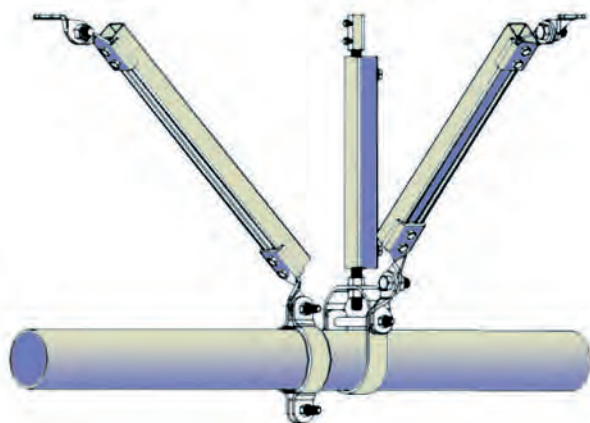


电缆桥架支撑
(电缆线盒、母线槽)

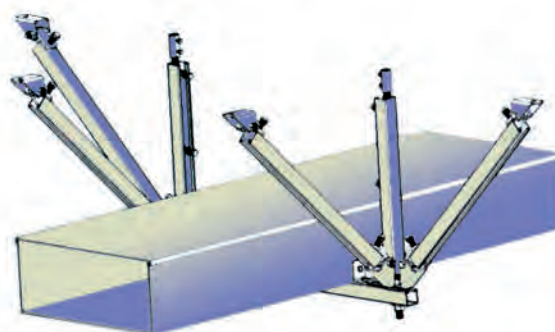

矩形风管支撑
(适用空调、防排烟管道)

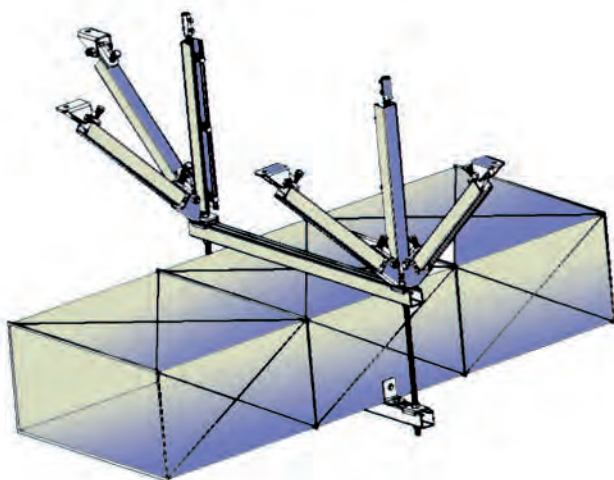

组合支架
(适用所有管道)

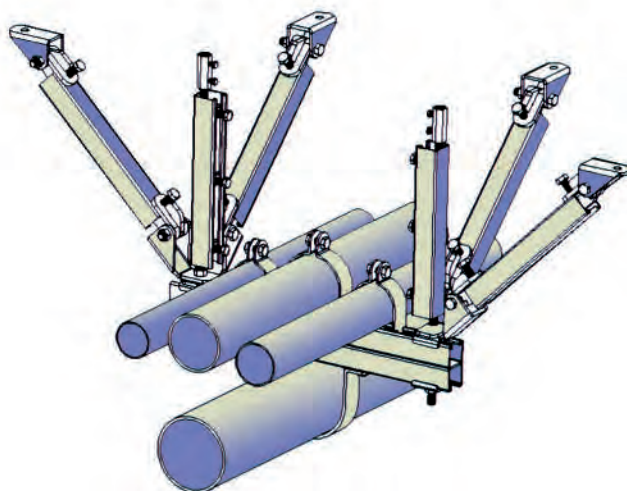

管束、加劲装置 Tube bundle, stiffening device

■ 抗震连接座 A

- 表面处理电镀锌(EG)或热浸镀锌(HDG)
- 通用设计可装配到各种结构体,包括混凝土、木质结构、工字梁及各自的连接器上
- 双头拧断螺栓无需使用扭力扳手,直至螺栓头脱落,简化抗震支撑的安装及检查。
- 适用于纵向和侧向抗震支撑应用
- 创新设计使安装变得简单,节约时间和成本。
- 符合 NFPA-13 抗震支撑要求

产品序号	设计载荷 (N)
NZHJ-KZ01-01	13500



■ 抗震连接座 B

- 表面处理电镀锌(EG)或热浸镀锌(HDG)
- 双头拧断螺栓无需使用扭力扳手,直至螺栓头脱落,简化抗震支撑的安装及检查。
- 旋转型固定连接件,适用于纵向和侧向抗震支撑应用
- 创新设计使安装变得简单,节约时间和成本。
- 符合 NFPA-13 抗震支撑要求

产品序号	Φ (mm)	设计载荷 (N)
NZHJ-KZ02-01	13	13500
NZHJ-KZ02-02	17	13500
NZHJ-KZ02-03	21	13500



■ 可调式铰链 A

- 表面处理电镀锌(EG)或热浸镀锌(HDG)
- 创新设计,通过槽钢螺母与之进行连接,将螺栓拧至规定扭矩
- 适用于纵向和侧向抗震支撑应用
- 符合美国联邦技术规范 WW-H-171(类型 8)以及制造商协会(MSS)sp-59sp-69(类型 8)。

产品序号	设计载荷 (N)
NZHJ-KZ03-01	7300





■ 可调式铰链B

- 表面处理电镀锌(EG)或热浸镀锌(HDG)
- 创新设计,通过槽钢螺母与之进行连接,将螺栓拧至规定扭矩
- 旋转型固定件,可以轻易的进行安装,适用于纵向和侧向抗震支撑应用
- 符合美国联邦技术规范 WW-H-171(类型 8)以及制造商协会(MSS)5p-59sp-69(类型 8)。



产品序号	Φ (mm)	设计载荷 (N)
NZHJ-KZ04-01	13	7300
NZHJ-KZ04-02	17	7300

■ U型管吊架

- 表面处理:电镀锌(EG)或热浸镀锌(HDG)
- 尺寸范围:DN65-DN150
- 符合美国联邦技术规范 WW-H-171(类型 1)以及制造商标准化协会(M5S)5P-59SP-69(类型 1)



产品序号	规格 (DN)	D (mm)	M (mm)	A (mm)	B (mm)	设计载荷 (N)
NZHJ-KZ05-01	65	63.5	M12	129	90	4750
NZHJ-KZ05-02	65	76.1	M12	147	102	4750
NZHJ-KZ05-03	80	88.9	M12	164	112	4750
NZHJ-KZ05-04	100	101.6	M16	184	126	9000
NZHJ-KZ05-05	100	108	M16	193	132	9000
NZHJ-KZ05-06	100	114	M16	202	138	9000
NZHJ-KZ05-07	125	133.3	M16	221	147	9000
NZHJ-KZ05-08	125	140	M16	231	154	9000
NZHJ-KZ05-09	150	159	M16	258	172	9000
NZHJ-KZ05-10	150	168	M16	270	180	9000

管束、加劲装置 *Tube bundle, stiffening device*

■ 管 夹

- 表面处理: 电镀锌(EG)或热浸镀锌(HDG)
- 尺寸范围: DN65-DN300
- 符合美国联邦技术规范 WW-H-171(类型 8)以及制造标准化协会(M5S)SP-59SP-69(类型 8)



产品序号	规格 (DN)	D (mm)	RS (mm)	设计载荷 (N)
NZHJ-KZ06-01	65	63.5	M12	4750
NZHJ-KZ06-02	65	76.1	M12	4750
NZHJ-KZ06-03	80	88.9	M12	4750
NZHJ-KZ06-04	100	101.6	M16	9000
NZHJ-KZ06-05	100	108	M16	9000
NZHJ-KZ06-06	100	114	M16	9000
NZHJ-KZ06-07	125	133.3	M16	9000
NZHJ-KZ06-08	125	140	M16	9000
NZHJ-KZ06-09	150	159	M16	9000
NZHJ-KZ06-10	150	168	M16	9000
NZHJ-KZ06-11	200	219	M16	18000
NZHJ-KZ06-12	250	273	M16	18000
NZHJ-KZ06-13	300	323.9	M16	18000



■ 鞍型夹

- ◎ 表面处理:电镀锌(EG)
- ◎ 尺寸范围:DN150
- ◎ 简化抗震支撑的安装及检查,并且无需使用扭矩扳手
- ◎ 适用于径向抗震支撑应用

产品型号	支撑外径	最大支架角度		最大水平地震作用	沿撑杆的最大地震作用
		与水平位	与垂直位		
NZHJ-KZ09-01	33.7	30	60	5900	6800
		45	45	4800	6800
		60	30	3400	6800



■ V型加劲装置

- ◎ 表面处理:电镀锌(EG)

产品型号	ScM(mm)
NZHJ-KZ10-01	M10



■ U型加劲装置

- ◎ 表面处理:电镀锌(EG)

产品型号	M(mm)	L(mm)
NZHJ-KZ11-01	M8	33
NZHJ-KZ11-02	M10	33
NZHJ-KZ11-03	M12	33



农光互补支架系统

FARMING AND LIGHT COMPLEMENTATION MOUNTING SYSTEM



产品特点 /Performance Features

上部为开放式光伏电站，地上可种植千亩中草药。最大化合理利用土地资源，是新农业和新能源的完美结合。

Top is open type pv power station, and thousand hectares herbal medicine could be planted on the floor. Make full use of land source, and perfectly combine new agriculture and new energy.

产品说明 /Product Description

- 可以大规模的整齐铺设
- Large scale orderly lay
- 安装便捷、组合方便
- Easy installation、Easy combination
- 支架结构三角支撑、安全稳定
- Triangle support、safe and stable
- 免维护、抗风能力强
- Maintenance-free、strong wind-resistance

技术参数 /Technical Parameter

安装地点 Installation Position	户外地面 Outdoor ground	支架材质 Mostly Tile type	Q235B
安装角度 Installation Angle	根据客户要求 According to the customers demand	安装高度 Installation Height	根据客户要求 According to the customers demand
抗风能力 Windprod Capacity	35m/s	雪荷载 Now Load	1.4KN/m ²
太阳能板类型 Solar Panel Type	有框或无框 With or Without Frame	组件排列 Panel Display	横向或纵向 Transverse or lengthways
太阳能板尺寸 Solar Panel Size	任意 Any	国际标准 International Standard	符合AS/NZS 1170和其他国际标准 According to AS/NZS 1170 and another international standard
支持轨道 Support Track	铝合金挤压件 Aluminium Extrusion	质量保证 Quality Guarantee	20年质量保证 20 Years

丘陵地区支架系统

HILLY AREA SUPPORT SYSTEM



产品特点 /Performance Features

可以再坡地或丘陵等崎岖不平的场所任意安装

Could be installed on sloped fields or hills

产品说明 /Product Description

- 单柱基础、现场预埋
- 提高土地利用、抗风性能好
- 支架结构简化，安装便捷，免钻免焊
- 支架结构满足丘陵地带特有的波峰和波谷技术要求
- Single pole base、pre-embedded beforehand
- Improve land use rate、good wind resistance performance
- Easy bracket structure, easy installation, free of drilling & welding
- Easy bracket structure meets the requests of crest&trough on hilly land.

技术参数 /Technical Parameter

安装地点 Installation Position	山坡 Mountain slope	支架材质 Mostly Tile type	Q235B
安装角度 Installation Angle	根据客户要求 According to the customers demand	安装高度 Installation Height	根据客户要求 According to the customers demand
抗风能力 Windprod Capacity	35m/s	雪荷载 Now Load	1.4KN/m ²
太阳能板类型 Solar Panel Type	有框或无框 With or Without Frame	组件排列 Panel Display	横向或纵向 Transverse or lengthways
太阳能板尺寸 Solar Panel Size	任意 Any	国际标准 International Standard	符合AS/NZS 1170和其他国际标准 According to AS/NZS 1170 and another international standard
支持轨道 Support Track	铝合金挤压件 Aluminium Extrusion	质量保证 Quality Guarantee	20年质量保证 20 Years

螺旋桩支架系统

SCREW PILE MONNTING SYSTEM



产品特点 /Performance Features

减少地基的花费，缩短安装时间，降低对施工环境的影响

Reduce the cost of foundation, shorten installation time, lower the influence of construction environment.

产品说明 /Product Description

- 能快速安装，适用于任何土质类型，甚至在山坡上
- 节约时间，节约成本，减少施工工期
- 无须做大规模场地平整，无须开挖地面，不破坏地表植被，对地下水文和地质环境无污染
- 产品可回收或移植至其他区域，电站使用结束后可恢复原有地貌，便于土地的复耕、复垦和再次开发。
- Fast installation、suitable for whatever soil texture,even on the hill top.
- Time saving、cost saving、lessen construction duration.
- Ummeccessarily make large-scale field leveling and excavate ground surface, not destroy land vegetation, pollution-free of geological environment.
- The products coule be recycable or transplant to other region, recovering original landform after finishing power station, easy second ploughing、reclamation、and re-exploit.

技术参数 /Technical Parameter

安装地点 Installatiion Position	户外地面 Outdoor ground	支架材质 Mostly Tile type	Q235B
安装角度 Installatiion Angle	根据客户要求 According to the customers demand	安装高度 Installation Height	根据客户要求 According to the customers demand
抗风能力 Windprod Capacity	35m/s	雪荷载 Now Load	1.4KN/m ²
太阳能板类型 Solar Panel Type	有框或无框 With or Without Frame	组件排列 Panel Display	横向或纵向 Transverse or lengthways
太阳能板尺寸 Solar Panel Size	任意 Any	国际标准 International Standard	符合AS/NZS 1170和其他国际标准 According to AS/NZS 1170 and another international standard
支持轨道 Support Track	铝合金挤压件 Aluminium Extrusion	质量保证 Quality Guarantee	20年质量保证 20 Years



水泥基础支架系统

CONCRETED FOUNDATION MOUNTING SYSTEM



产品特点 /Performance Features

水泥基础支架系统已发展成为适用于户外开阔地面的通用型太阳能板安装系统。成本低廉、安装快捷、稳定性好、抗风能力强。

Concreted to foundation support system has developed to be outdoor open terratin solar panel installation system. Low cost, fast installation、good stability、strong wind resistance.

产品说明 /Product Description

- 外观简洁大气
- 结构精巧、安装便捷
- 应用多样化，组合性能强
- 免维护、抗风能力强
- 可适用地势条件复杂地区
- Simple and grand appearance
- Exquisite structure、easy installation
- Diversify use、easy assembly
- Maintenance-free、strong wind-resistance
- Applicable for complex terrain

技术参数 /Technical Parameter

安装地点 Installatiion Position	户外地面 Outdoor ground	支架材质 Mostly Tile type	Q235B
安装角度 Installatiion Angle	根据客户要求 According to the customers demand	安装高度 Installation Height	根据客户要求 According to the customers demand
抗风能力 Windprod Capacity	35m/s	雪荷载 Now Load	1.4KN/m ²
太阳能板类型 Solar Panel Type	有框或无框 With or Without Frame	组件排列 Panel Display	横向或纵向 Transverse or lengthways
太阳能板尺寸 Solar Panel Size	任意 Any	国际标准 International Standard	符合AS/NZS 1170和其他国际标准 According to AS/NZS 1170 and another international standard
支持轨道 Support Track	铝合金挤压件 Aluminium Extrusion	质量保证 Quality Guarantee	20年质量保证 20 Years

彩钢瓦屋面光伏支架系统

COLOR STEEL TILE PHOTOVOLTAIC BRACKET SYSTEM



产品特点 /Performance Features

适用于偏远地区农庄、山村等，由于电网无法覆盖或者覆盖成本过高，通过此独立分布式光伏系统，可以解决用电问题。此系统也可应用于各种家庭设计，既美观，也可为以后解决能源问题提供一条可持续发展的道路。

Suitable for remote area farm, village, due to the power grid can not cover or cover the cost is too high, the family use PV system, can solve the problem of using electricity. This system also can be applied to various family design, not only beautiful, but also can provide a sustainable development for the future to solve the energy problem of road.

产品说明 /Product Description

- 外观简洁大气
- Simple and grand appearance
- 结构精巧、安装便捷
- Exquisite structure、easy installation
- 应用范围广泛
- Widely applied range
- 免维护、抗风能力强
- Maintenance-free、strong wind-resistance
- 单位重量轻、不破坏原有屋顶结构
- Light unit weight、keep original roof structure

技术参数 /Technical Parameter

安装地点 Installation Position	户外地面 Outdoor ground	支架材质 Mostly Tile type	Q235B
安装角度 Installation Angle	根据客户要求 According to the customers demand	安装高度 Installation Height	根据客户要求 According to the customers demand
抗风能力 Windprod Capacity	35m/s	雪荷载 Now Load	1.4KN/m ²
太阳能板类型 Solar Panel Type	有框或无框 With or Without Frame	组件排列 Panel Display	横向或纵向 Transverse or lengthways
太阳能板尺寸 Solar Panel Size	任意 Any	国际标准 International Standard	符合AS/NZS 1170和其他国际标准 According to AS/NZS 1170 and another international standard
支持轨道 Support Track	铝合金挤压件 Aluminium Extrusion	质量保证 Quality Guarantee	20年质量保证 20 Years



钢构支架零配件

STEEL SOTAR RACK PARTS

部件编号 Mode	图 形 Diagram	规 格 Size(mm)	材 质 Material
底 座 Base		100 × 50 120 × 50 150 × 60 200 × 100 300 × 100	Q235B
横 梁 Beam		21 × 41.3 41.3 × 41.3 41.3 × 52 41.3 × 62 41.3 × 76 41.3 × 82	
立 柱 Column		41.3 × 21D 41.3 × 41.3D 41.3 × 52D 41.3 × 62D 41.3 × 76D 41.3 × 82D	
螺旋桩 Screw pile		Φ66 × 650 Φ76 × 800 Φ76 × 1600 Φ89 × 1200 Φ89 × 2000 Φ114 × 1400 Φ140 × 1450	


钢构支架零配件

STEEL SOTAR RACK PARTS

部件编号 Mode	图 形 Diagram	规 格 Size(mm)	材 质 Material
压 块 Pressblock		40 × 20中压 40 × 20边压 40 × 15薄压 25 × 20中，边压	Q235B
连接件 Connector		50 × 150 50 × 200 40 × 150 40 × 200	
五金件 Hardware		M6 × 50 M8 × 50 M10 × 50 M12 × 50 M14 × 50 M20 × 50	
卡扣件 Fastener		40 × 40 50 × 40	

喷塑颜色色板


Colours of plastic - spaying plates




桔纹灰(726)
DZ-S01



浅驼灰
DZ-S02



桔红
DZ-S03



象牙白
DZ-S04




果绿色
DZ-S05



银灰
DZ-S06

此色样仅供参考,可按客户要求订制。

Colour samples are for reference only, and colour can follow the order requirement.

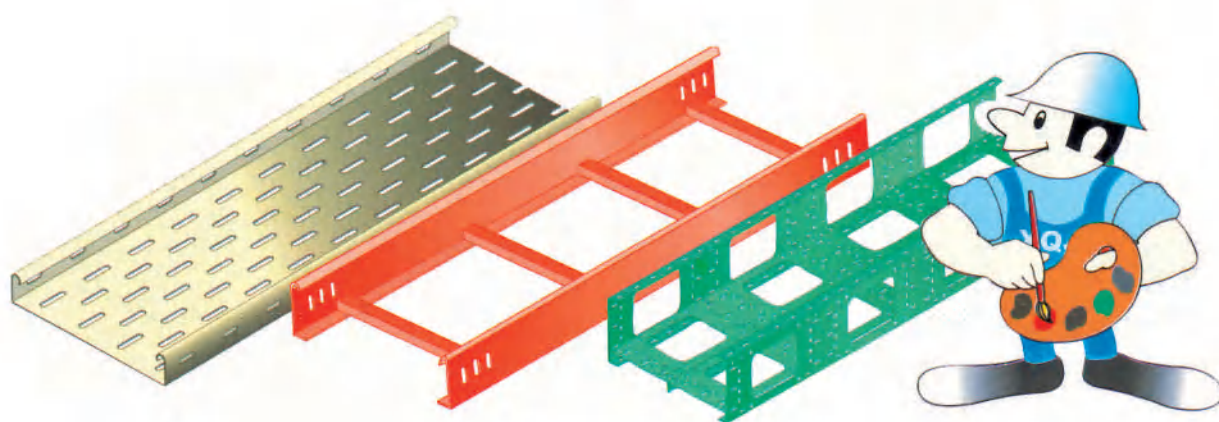

真诚沟通 合作顺利

Sincere Communication, Cooperation



江苏奥凯电气有限公司

JIANGSU OKEY ELECTRIC CO.,LTD.

地址 (Add): 江苏省镇江市新区港南路88号

电话 (Tel): 0511-83370688

传真 (Fax): 0511-83372966

Http://www.jskey.com